

Building Address: 254 Commercial St – Pierce Atwood



**Portland Fire Fighter Safety Building Marking System**  
Reflective white background

**Hazard of Contents (left at 9 o'clock):**

L- Low hazard; O- Ordinary Hazard; H- High hazard

**Construction Type (top at 12 o'clock):**

(the least of these types): FR- Fire-resistive; NC- Noncombustible; ORD- Ordinary; HT- Heavy Timber; C- Combustible

**Automatic Sprinkler and Standpipe Systems (right at 3 o'clock):**


(One or a combination): A- Automatic fire sprinkler throughout; P- Partial fire sprinkler; S- Standpipe; N- None

**Occupancy/ Life Safety Issues (bottom at 6 o'clock):**

L- Business, industrial, mercantile, residential, and storage occupancies; M- Ambulatory health care, assembly, educational, and day-care occupancies; H- Detention and Corrections, health care, and board and care occupancies.

**Special Hazards (Center):**

T- Truss or light weight construction; Other; Year at bottom of center

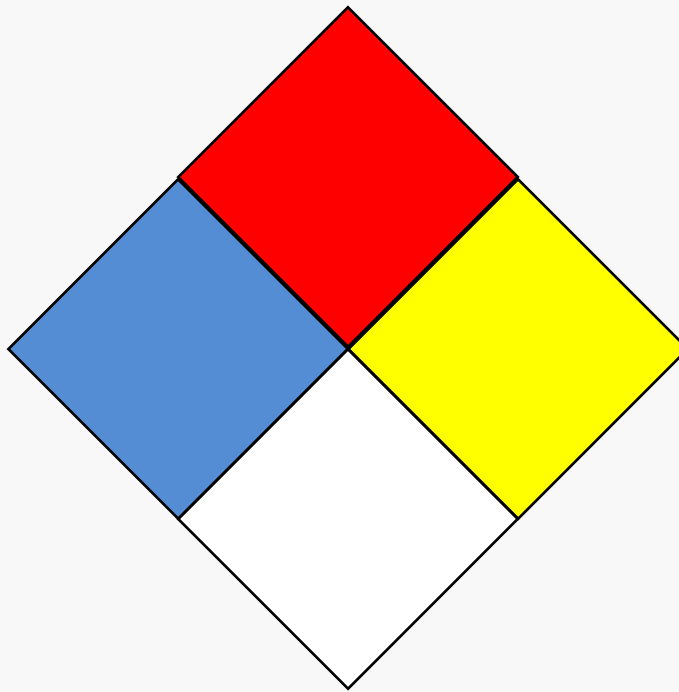

**NFPA 704 Signage**

NOT required IF not filled in

- Left (9 o'clock):** Health Hazards (Blue background)
- Top (12 o'clock):** Flammability Hazards (Red background)
- Right (3 o'clock):** Instability Hazards (Yellow background)
- Bottom (6 o'clock):** Special Hazards (white background)
- Under:** Other Special Hazards

**Special Notes:**

(ie: fire alarm or MSDS sheet location, property management co and em contact phone)

AES BOX 4688  
 WATERFRONT MAINE, LP  
 14 MAINE ST, BRUNSWICK, ME 04011  
 207-729-7970

Verify owner name, address and phone number before ordering.

Signs may be purchased from:  
 Awards & Recognition Inc., 955 Forest Ave (left side of building), Portland, ME 04101.  
 207-772-8770

Sign to be 8 ½” x 14” vertical if NFPA 704 signage is required, or 8 ½” x 11” vertical if NFPA 704 signage is not required. Signs must be mounted directly above each Knox Box or other approved located at approximately 6 feet above grade.