


FIFTH FLOOR FRAMING PLAN
1/8"=1'-0"

NOTES:
 1. RS INDICATES ROUGH SAWN.
 2. ALL JOISTS INDICATED TO BE REPLACED SHALL BE REPLACED WITH 4x12 RS.
 3. INDICATES APPROXIMATE AREA OF OBSERVED ROTTED DECKING REQUIRING REPLACEMENT.
 4. VERIFY ALL WALL TIE CONDITIONS. EXPOSE FOR ENGINEER REVIEW. TIES FOUND TO BE CORRODED EXCESSIVELY WILL REQUIRE REPLACEMENT. G.C. CARRY CONTINGENCY.
 5. REMOVE TIE RODS & INSTALL NEW TIE ONE AT A TIME. DO NOT HAVE MORE THAN ONE TIE OFF AT THE SAME TIME.

NOT FOR CONSTRUCTION
 PERMIT SET
 09/23/10

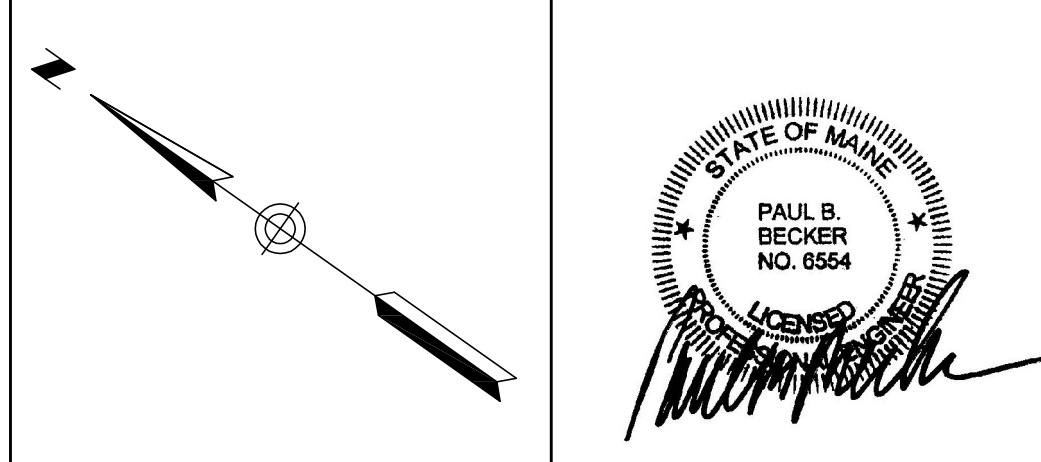

Blais Civil Engineers, PA
 780 Broadway
 South Portland, ME 04106
 T. 207.767.7300
 sblaise@blaisece.com

Bartlett Design
 942 Washington Street
 Bath, ME 04530
 T. 207.443.5447 F. 207.443.5560
 bartdes@blazenetme.net

Mechanical Systems Engineers
 Royal River Center, Unit #10
 10 Forest Falls Drive, Yarmouth, ME 04101
 T. 207.846.1441 F. 207.846.1443

Carroll Associates Landscape Architects
 217 Commercial Street, Suite 200
 Portland, ME 04101
 T. 207.772.1552 F. 207.0712

Becker Structural Engineers, Inc.
 75 York Street, Portland, ME 04101
 T. 207.879.1838 F. 207.879.1822
 www.beckerstructural.com

Winton Scott Architects, PA
 5 Milk Street, Portland, ME 04101
 T. 207.774.4811
 www.wintonscott.com

REV #	DATE	DESCRIPTION

Renovations To:
CUMBERLAND COLD STORAGE BUILDING
 Merrill's Wharf, Portland, Maine

FIFTH FLOOR FRAMING PLAN

S1.6