City of Portland, Maine - Building or Use Permit Application 389 Congress Street, 04101, Tel: (207) 874-8703, FAX: 874-8716 Owner: Location of Construction: Phone: Permit No: Tamarlane ERP Operations Owner Address: Lessee/Buyer's Name: Phone: BusinessName: Permit Issued: Phone: Contractor Name: Address: irbews Signs 608 Rt 1 Scarbomough ME 04074 161-8-025 JAN 2 0 1955 **COST OF WORK:** PERMIT FEE: Past Use: Proposed Use: \$34.80 **CITY OF PORTLAND** Housing Complex Same INSPECTION: 519nag, **FIRE DEPT.** □ Approved Use Group: U Type: ☐ Denied CBL: 161-B-025 BOCA-86 Zone: Signature: Signature: Zoning Approval: Proposed Project Description: PEDESTRIAN ACTIVITIES DISTRICT (F.A.D.) Action: Approved Special Zone or Reviews: Replace Signage total 49 og. ft. Approved with Conditions: ☐ Shoreland Denied □ Wetland ☐ Flood Zone ☐ Subdivision Signature: Date: ☐ Site Plan maj ☐minor ☐mm ☐ Permit Taken By: Date Applied For: Jaquery 19, 1999 **Zoning Appeal** □ Variance This permit application does not preclude the Applicant(s) from meeting applicable State and Federal rules. ☐ Miscellaneous Building permits do not include plumbing, septic or electrical work. ☐ Conditional Use Building permits are void if work is not started within six (6) months of the date of issuance. False informa-☐ Interpretation ☐ Approved tion may invalidate a building permit and stop all work.. □ Denied PERMIT ISSUED **Historic Preservation** WITH REQUIREMENTS □ Not in District or Landmark ☐ Does Not Require Review ☐ Requires Review Action: CERTIFICATION □ Appoved ☐ Approved with Conditions I hereby certify that I am the owner of record of the named property, or that the proposed work is authorized by the owner of record and that I have been □ Denied authorized by the owner to make this application as his authorized agent and I agree to conform to all applicable laws of this jurisdiction. In addition, if a permit for work described in the application is issued, I certify that the code official's authorized representative shall have the authority to enter all Date: areas covered by such permit at any reasonable hour to enforce the provisions of the code(s) applicable to such permit January 19, 1999 SIGNATURE OF APPLICANT PHONE: ADDRESS: DATE: KC/TH RESPONSIBLE PERSON IN CHARGE OF WORK, TITLE PHONE:

White-Permit Desk Green-Assessor's Canary-D.P.W. Pink-Public File Ivory Card-Inspector

CEO DISTRICT

| COMMENTS | | | | | | |
|--------------|------------------------|-------|--|--|--|--|
| | | | | | | |
| | | | | | | |
| 2/4/02 /Jue. | | | | | | |
| | | | | | | |
| all | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| 3 | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | A400L | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | Transaction Devel | | | | | |
| | Inspection Record Type | Date | | | | |
| | Foundation: | | | | | |
| | Framing: | | | | | |
| | Plumbing: Final: | | | | | |
| | Other: | | | | | |

BUILDING PERMIT REPORT

| DATE: | 20 January 1999 ADDRESS: 988 Washing Ton AUR CAL 161-B-625 NFOR PERMIT: Replace Signage |
|---------|---|
| REASO | NFORPERMIT: Replace Signage |
| 7(2,100 | NGOWNER: ERP Operating |
| | |
| | ACTOR: Scarboro Signs |
| PERMIT | T APPLICANT: |
| USE GR | COUP SIGNAGY BOCA 1996 CONSTRUCTION TYPE |
| | CONDITION(S) OF APPROVAL |
| mu i n | rmit is being issued with the understanding that the following conditions are met: |
| | |
| Approv | ed with the following conditions: 4/ 43/ |
| P | |
| 1. | This permit does not excuse the applicant from meeting applicable State and Federal rules and laws. |
| 2. | Before concrete for foundation is placed, approvals from the Development Review Coordinator and Inspection Services must be |
| 0.5 | obtained. (A 24 hour notice is required prior to inspection) Foundation drain shall be placed around the perimeter of a foundation that consists of gravel or crushed stone containing not more |
| 2.5 | than 10 percent material that passes through a No. 4 sieve. The drain shall extend a minimum of 12 inches beyond the outside |
| | edge of the footing. The thickness shall be such that the bottom of the drain is not higher than the bottom of the base under the |
| | floor, and that the top of the drain is not less than 6 inches above the top of the footing. The top of the drain shall be covered with |
| | an approved filter membrane material. Where a drain tile or perforated pipe is used, the invert of the pipe or tile shall not be |
| | higher than the floor elevation. The top of joints or top of perforations shall be protected with an approved litter memorane |
| | material. The pipe or tile shall be placed on not less than 2" of gravel or crushed stone, and shall be covered with not less than 6" |
| | of the same material. Section 1813.5.2 |
| 2.6 F | Foundations anchors shall be a minimum of 1/2" in diameter, 7" into the foundation wall, minimum of 12" from corners of |
| | foundation and a maximum 6 'o.c. between bolts. (Section 2305.17) |
| 3. | Precaution must be taken to protect concrete from freezing. Section 1908.0 |
| 4. | It is strongly recommended that a registered land surveyor check all foundation forms before concrete is placed. This is done to |
| _ | verify that the proper setbacks are maintained. Private garages located beneath habitable rooms in occupancies in Use Group R-1, R-2, R-3 or I-1 shall be separated from |
| 5. | adjacent interior spaces by fire partitions and floor/ceiling assembly which are constructed with not less than 1-hour fire resisting |
| | rating. Private garages attached side-by-side to rooms in the above occupancies shall be completely separated from the interior |
| | spaces and the attic area by means of ½ inch gypsum board or the equivalent applied to the garage means of ½ inch gypsum board or the equivalent applied to the garage means of ½ inch gypsum board or the equivalent applied to the garage means of ½ inch gypsum board or the equivalent applied to the garage means of ½ inch gypsum board or the equivalent applied to the garage means of ½ inch gypsum board or the equivalent applied to the garage means of ½ inch gypsum board or the equivalent applied to the garage means of ½ inch gypsum board or the equivalent applied to the garage means of ½ inch gypsum board or the equivalent applied to the garage means of ½ inch gypsum board or the equivalent applied to the garage means of ½ inch gypsum board or the equivalent applied to the garage means of ½ inch gypsum board or the equivalent applied to the garage means of ½ inch gypsum board or the equivalent applied to the garage means of ½ inch gypsum board or the equivalent applied to the garage means of ½ inch gypsum board or the equivalent applied to the garage means of ½ inch gypsum board or the equivalent applied to the garage means of ½ inch gypsum board or the equivalent applied to the garage means of ½ inch gypsum board or the equivalent applied to the garage means of ½ inch gypsum board or the equivalent applied to the garage means of ½ inch gypsum board or the equivalent applied to the garage means of ½ inch gypsum board or the equivalent applied to the garage means of ½ inch gypsum board or the equivalent applied to the garage means of ½ inch gypsum board or the equivalent applied to the garage means of ½ inch gypsum board or the equivalent applied to the garage means of ½ inch gypsum board or the equivalent applied to the garage means of ½ inch gypsum board or the gypsum board or the equivalent applied to the garage means of ½ inch gypsum board or the gypsum |
| | or the equivalent applied to the garage side. (Chapter 4 Section 407.0 of the BOCA/1990) |
| 6. | All chimneys and vents shall be installed and maintained as per Chapter 12 of the City's Mechanical Code. (The BOCA National |
| • | Mechanical Code/1993). Chapter 12 & NFPA 211 |
| 7. | Sound transmission control in residential building shall be done in accordance with Chapter 12 section 1214.0 of the city's |
| 1 | huilding code |
| 0 | Quardrails & Handrails: A quardrail system is a system of building components located near the open sides of elevated waiking |
| | surfaces for the purpose of minimizing the possibility of an accidental fall from the walking surface to the lower level. I vinimizan |
| 1 | height all Use Groups 42" except Use Group R which is 36". In occupancies in Use Group A, B, H-4, I-1, I-2 ivi and R and |
| | -uklic corecas and onen parking structures, onen guards shall have halusters or be of solid material such that a spitcle with a |
| | diameter of 4" cappot pass through any opening. Guards shall not have an ornamental pattern that would provide a lauder eneog. |
| (| (Handrails shall be a minimum of 34" but not more than 38". Use Group R-3 shall not be less than 30", but not more than 38".) |
| I | Handrail grip size shall have a circular cross section with an outside diameter of at least 1 1/4" and not greater than 2". (Sections |
| | 1021 & 1022.0) - Handrails shall be on both sides of stairway. (Section 1014.7) |
| 9. I | Headroom in habitable space is a minimum of 7'6". (Section 1204.0) Stair construction in Use Group R-3 & R-4 is a minimum of 10" tread and 7 3/4" maximum rise. All other Use group minimum |
| 10. | Stair construction in Use Group K-3 & K-4 is a minimum of 10 quead and 7 5/4 maximum 1130. This outer 600 group manufacture of 10.14 0.) |
| 11. | 11" tread. 7" maximum rise.(Section 1014.0) The minimum headroom in all parts of a stairway shall not be less than 80 inches. (6' 8") 1014.4 |
| 11, | The manner near com at an practice action of |

Every sleeping room below the fourth story in buildings of use Groups R and I-1 shall have at least one operable window or exterior door approved for emergency egress or rescue. The units must be operable from the inside without the use of special

12.

knowledge or separate tools. Where windows are provided as <u>means of egress or rescue</u> they shall have a sill height not more than 44 inches (1118mm) above the floor. All egress or rescue windows from sleeping rooms shall have a minimum net clear opening height dimension of 24 inches (610mm). The minimum net clear opening width dimension shall be 20 inches (508mm), and a minimum net clear opening of 5.7 sq. ft. (Section 1018.6)

- Each apartment shall have access to two (2) separate, remote and approved means of egress. A single exit is acceptable when it exits directly from the apartment to the building exterior with no communications to other apartment units. Section 1010.1
- 14. All vertical openings shall be enclosed with construction having a fire rating of at lest one (1)hour, including fire doors with self closer's. (Over 3 stories in height requirements for fire rating is two (2) hours.) Section 710.0
- 15. The boiler shall be protected by enclosing with (1) hour fire-rated construction including fire doors and ceiling, or by providing automatic extinguishment. Table 302.1.1
- All single and multiple station smoke detectors shall be of an approved type and shall be installed in accordance with the provisions of the City's Building Code Chapter 9, Section 920.3.2 (BOCA National Building Code/1996), and NFPA 101 Chapter 18 & 19. (Smoke detectors shall be installed and maintained at the following locations):
 - In the immediate vicinity of bedrooms
 - In all bedrooms
 - In each story within a dwelling unit, including basements

In addition to the required AC primary power source, required smoke detectors in occupancies in Use Groups R-2, R-3 and I-1 shall receive power from a battery when the AC primary power source is interrupted. (Interconnection is required) Section 920.3.2

- 17. A portable fire extinguisher shall be located as per NFPA #10. They shall bear the label of an approved agency and be of an approved type. Section 921.0
- 18. The Fire Alarm System shall be maintained to NFPA #72 Standard.
- 19. The Sprinkler System shall maintained to NFPA #13 Standard.
- 20. All exit signs, lights, and means of egress lighting shall be done in accordance with Chapter 10 Section & Subsections 1023. & 1024. Of the City's building code. (The BOCA National Building Code/1996)
- 21. Section 25-135 of the Municipal Code for the City of Portland states, "No person or utility shall be granted a permit to excavate or open any street or sidewalk from the time of November 15 of each year to April 15 of the following year".
- The builder of a facility to which Section 4594-C of the Maine State Human Rights Act Title 5 MRSA refers, shall obtain a certification from a design professional that the plans commencing construction of the facility, the builder shall submit the certification to the Division of Inspection Services.
- 23. Ventilation shall meet the requirements of Chapter 12 Sections 1210. Of the City's Building Code. (crawl spaces & attics)
- All electrical, plumbing and HVAC permits must be obtained by a Master Licensed holders of their trade. No closing in of walls until all electrical (min. 72 hours notice) and plumbing inspections have been done.
- 25. All requirements must be met before a final Certificate of Occupancy is issued.
- All building elements shall meet the fastening schedule as per Table 2305.2 of the City's Building Code. (The BOCA National Building Code/1996).
- 27. Ventilation of spaces within a building shall be done in accordance with the City's Mechanical Code (The BOCA National Mechanical Code/1993). (Chapter M-16)
- 28. Please read and implement the attached Land Use-Zoning report requirements.
- 29. Boring, cutting and notching shall be done in accordance with Sections 2305.4.4, 2305.5.1 and 2305.3. of the City's building code.

| 30. | All Signage Shall be crested in accordance with Chauter31 |
|-------|--|
| X-31. | of The City's bldg. Code (The BOCH MATIONAL BUILDING CODE) 1996) |
| 22 | 0+130 Citys 6149. Code (1903) 50001 MAS 110114 COURT 112) |
| 32. | |
| | |

P. Samuel Hoffses, Building Inspector

cc: Lt. McDougall, PFD

Marge Schmuckal, Zoning Administrator

PSH 8-1-98

33.

THIS IS NOT A PERMIT/CONSTRUCTION CANNOT COMMENCE UNTIL THE PERMIT IS ISSUED

Building or Use Permit Pre-Application

Attached Single Family Dwellings/Two-Family Dwelling

Multi-Family or Commercial Structures and Additions Thereto

In the interest of processing your application in the quickest possible manner, please complete the Information below for a Building or Use Permit.

NOTE**If you or the property owner owes real estate or personal property taxes or user charges on ANY PROPERTY within the City, payment arrangements must be made before permits of any kind are accepted.


| | Location/Addressof Construction (include Portion of Building) | 46 A TH | JURRIAN . | ₹ | |
|---|--|---|---|---|---------------|
| | Total Square Footage of Proposed Structure | Square | Footage of Lot | | |
| | Tax Assessor's Chart, Block & Lot Number 161-B-02.5 Chart# 16 Block# Lot# B 35 | Owner: ERPIPEI | RATILIZ LINTE | Telephone#: | |
| | Owner's Address: | Lessee/Buyer's Name (If A | Applicable) | Cost Of Work: | \$34.80 |
| | Proposed Project Description:(Please be as specific as possible) Replace Slynage | | 49 # | | |
| K | Contractor's Name, Address & Telephone 608 87 5 | Scriw. The | 883-67 | 96 04074 | Rec'd By |
| | Current Use: MMSING COMPLEX | Propos | sed Use: < Cl | 2 | |
| | | with the 1996 Nationa litioning) installation n: Your Deed or Purcha of your Construction | I Electrical Code as a must comply with the second | amended by Section the 1993 BRIGA Med CITY OF PORTLAND, at | hanical code. |
| | Minor or Major site plan review will be required for the above proposed projects. The attached checklist outlines the minimum standards for a site plan. 4) Building Plans | | | E | |
| | A complete set of construction drawings showing a Cross Sections w/Framing details (include Floor Plans & Elevations | ll of the following elem | ents of construction: | | essional. |
| | Window and door schedules Foundation plans with required drainage Electrical and plumbing layout. Mechanic equipment, HVAC equipment (air handles) | cal drawings for any sp | | - | |
| | 1F | G)J F 01 (1 | | | s included. |

I hereby certify that I am the Owner of record of the named property, or that the proposed work is authorized by the owner of record and that I have been authorized by the owner to make this application as his/her authorized agent. I agree to conform to all applicable laws of this jurisdiction. In addition, if a permit for work described in this application is issued, I certify that the Code Official's authorized representative shall have the authority to enter all areas covered by this permit at any reasonable hour to enforce the provisions of the codes applicable to this permit.

| notes the provisions of the cougs applicable to this perinte. | |
|---|---------------------|
| Signature of applicant: | Date: 1/19/99 |
| Building Permit Fee: \$25.00 for the 1st \$1000.cost plus \$5.00 per \$1,000.cost | |
| Additional Site review and related fees are attached on a | a separate addendum |

2.



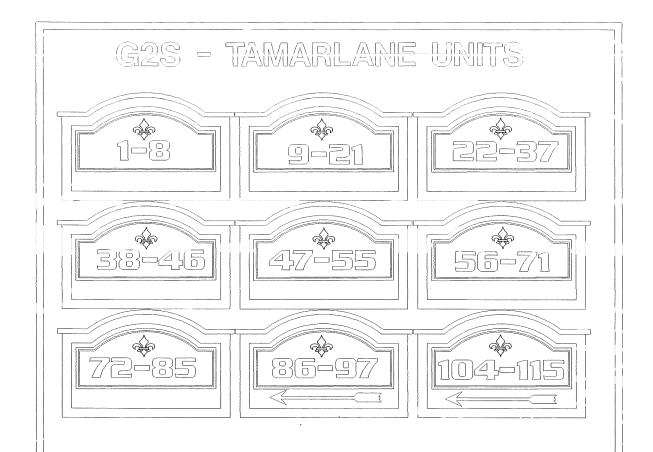

161 B25

SIGNAGE PRE-APPLICATION

PLEASE ANSWER ALL QUESTIONS ZONE: ADDRESS:_ APPLICANT: < ASSESSOR NO. PLEASE CIRCLE APPROPRIATE ANSWER MULTI-TENANT LOT? (YES), NO SINGLE TENANT LOT? YES (NO FREESTANDING SIGN? (ex. Pole Sign) (YES) NO --- DIMENSIONS HEIGHT DIMENSIONS HEIGHT_ YES NO MORE THAN ONE SIGN? DIMENSIONS___ SIGN ATTACHED TO BLDG.? NO YES DIMENSIONS_ MORE THAN ONE SIGN? YES . NO AWNING: YES NO IS AWNING BACKLIT? YES NO HEIGHT OFF SIDEWALK IS THERE ANY MESSAGE, TRADEMARK OR SYMBOL ON IT?_ LIST ALL EXISTING SIGNAGE AND THEIR DIMENSIONS: TENANT BLDG. FRONTAGE (IN FEET):_ *** REQUIRED INFORMATION

AREA FOR COMPUTATION

YOU SHALL PROVIDE:

A SITE SKETCH AND BUILDING SKETCH SHOWING EXACTLY WHERE EXISTING AND NEW SIGNAGE IS LOCATED MUST BE PROVIDED. SKETCHES AND/OR PICTURES OF, PROPOSED ARE ALSO REQUIRED.

SIGNATURE OF APPLICANT:

DATE: 12/2/29

INFORMATION REQUIREMENTS FOR SIGN PERMIT APPLICATION

Applicants for a sign permit will be asked to submit the following information to the Code Enforcement Office:

- 1. Proof of insurance
- 2. Letter of permission from the owner
- 3. A sketch plan of lot, indicating location of buildings, driveways and any abutting streets or right of ways. Lengths of building frontages and street frontages should be noted. (see attached)
- 4. Indicate on the plan all existing and proposed signs
- 5. Computation of the following:
 - A) Sign area of each existing and proposed building sign
 - B) Sign area height and setback of each existing and proposed freestanding sign
- 6. A sketch of any proposed sign(s), indicating dimensions, materials, source of illumination and construction method (see attached).
- 7. Certificate of flammability required for awning/canopy at time of application.
- 8. UL # required for lighted signs at the time of application.

Fee for permit - \$25.00 plus \$0.20 per square foot

Fee for awning based on cost of work - \$25.00 for the first \$1,000.00, \$5.00 for each additional \$1,000.000.

NOTE: Once a sketch plan has been filed for a property, the code enforcement office will keep a record of the plan so that a new sketch plan will not be required for later changes to signage on the property. In such an instance, applicants will only be required to submit information applicable to the new sign.

29 18 5.75 4,25 48 Sq ft

LIXURY APARTMENTS

PASING
CENTER

143424 13

Ownerthands







Replace all.




3×2 Replace 2×11/2- On BLDG



lexil Round



Demend Jul

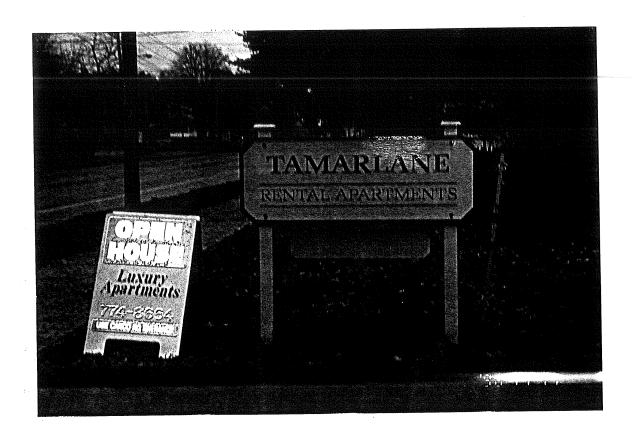

STANDARD CONTRACT AGREEMENT

Date: December 2, 1998

This Agreement between:

APARTMENTS:

CONTRACTOR:

ERP Operating Limited Partnership An Illinois limited partnership as Agent for the Owner of:

Tamarlane Apartments 46 A Tamarlane Portland, ME 04103 Scarboro Signs 608 US Route 1 Scarborough, ME 04074

hereinafter referred to as the "APARTMENTS"

hereinafter referred to as the "CONTRACTOR"

In consideration of the financial agreement recited in this Agreement between the APARTMENTS and the CONTRACTOR, the parties agree as follows:

- 1. The CONTRACTOR agrees to perform the services set forth fully in the specifications that are made part of the contract. The specifications describe the scope and nature of the work that the CONTRACTOR is undertaking.
- 2. The CONTRACTOR will commence this work outlined under this Agreement on or before December 15, 1998 and so long as this Agreement is in force, CONTRACTOR will continue such work until completion of all work called for under this Agreement. All work shall be completed on or before January 15, 1999.
- 3. The APARTMENTS will pay the contractors Two Thousand Seven Hundred Twenty-one Dollars and Forty-six Cents (2,721.46) for CONTRACTOR services Provided herein as per attached proposal dated November 23, 1998, consisting of one (1) page.
- 4. In the event the CONTRACTOR fails to perform the undertakings recited in this Agreement, the APARTMENTS may terminate this Agreement upon forty-eight hours notice to CONTRACTOR.
- 5. Unless otherwise specifically agreed and set forth herein, this Agreement may be terminated by the APARTMENTS at any time without cause. In order to execute such termination, the APARTMENTS will give the CONTRACTOR three (3) days written notice of such termination. In the event of such termination, the APARTMENTS will pay the CONTRACTOR for all work properly performed hereunder up to the date of termination. The APARTMENTS will have no further obligation or liability to the CONTRACTOR.
- 6. The CONTRACTOR will deliver material and labor lien waivers, duly executed, at the time of invoice made under this Agreement. Payments will be less 10% retention, until APARTMENTS fully accept work, final 10% will be paid upon receipt of final waiver and invoice. N/A