


PROJ. MANAGER	JOEL KITTEDGE	BY	DATE
DESIGN-DETAILED	8-9-17	CMS/JBC	8-9-17
CHECKED-REVIEWED	8-9-17	DAS	8-9-17
DESIGN-DETAILED	8-9-17	CMS/JBC	8-9-17
DESIGN-DETAILED	8-9-17	DAS	8-9-17
REVISIONS 1			
REVISIONS 2			
REVISIONS 3			
REVISIONS 4			
FIELD CHANGES			



**GENERAL NOTES:**

- THE UNDERGROUND UTILITIES INFORMATION SHOWN ON THESE PLANS HAVE BEEN COMPILED BY NADEAU LAND SURVEYORS FROM FIELD SURVEY INFORMATION AND EXISTING DRAWINGS. THE UTILITY LOCATIONS SHOWN IN THIS PLAN ARE NOT TO BE CONSIDERED AS A GUARANTEE OF ACCURACY. CONTRACTOR SHALL NOTIFY ALL UTILITIES PRIOR TO COMMENCING WORK, ALLOWING SUFFICIENT TIME TO LOCATE AND MARK THE LOCATION OF BURIED UTILITIES. CONTRACTOR SHALL CONTACT "DIG SAFE", TELEPHONE 888-344-7253, PRIOR TO EXCAVATION.
- CONTRACTOR SHALL PROVIDE AND MAINTAIN EROSION AND SEDIMENTATION CONTROL MEASURES, IN ACCORDANCE WITH THESE PLANS AND THE LATEST EROSION CONTROL MANUAL, THROUGHOUT THE CONSTRUCTION PERIOD. BEST MANAGEMENT PRACTICES MANUAL - KEEP ALL STREETS FREE OF DUST, MUD AND DEBRIS. STREETS AND WALKWAYS SHALL BE SWEEPED REGULARLY, AND TEMPORARY CONSTRUCTION ENTRANCES SHALL BE UTILIZED DURING CONSTRUCTION.
- CONTRACTOR SHALL MAINTAIN A SECURE WORKSITE, AND SHALL INSTALL AND MAINTAIN SAFETY AND SECURITY MEASURES, SUCH AS FENCING, BARRIERS, SIGNAGE, AND SAFETY MEASURES SHALL BE IN PLACE DURING CONSTRUCTION. SAFETY MEASURES SHALL BE LEFT OPEN DURING NON-WORKING HOURS. NO TRENCH SHALL BE LEFT OPEN DURING NON-WORKING HOURS. SITE SAFETY IS THE RESPONSIBILITY OF THE CONTRACTOR, DURING BOTH WORKING AND NON-WORKING HOURS.
- EXISTING FACILITIES WITHIN THE CITY RIGHT-OF-WAY (I.E. GRANITE CURBING, SIDEWALK BRICKS, TREES, POLES, LIGHT POSTS, CATCH BASINS, SIGNAGE, PLAY EQUIPMENT, ETC) ARE THE PROPERTY OF THE CITY. CONTRACTOR SHALL REMOVE AND DISPOSE OF ALL SUCH FACILITIES IN ACCORDANCE WITH THE CITY'S MATERIAL STOCKYARD ON OUTER CONGRESS STREET. CONTRACTOR SHALL REMOVE AND DISPOSE OF ALL SUCH FACILITIES AT THE REQUEST OF THE CITY OR OWNER, AT NO ADDITIONAL COST TO THE CONTRACTOR.
- MAINTAIN VEHICULAR AND PEDESTRIAN FLOW THROUGH CITY STREETS AT ALL TIMES. COORDINATE ALL SIDEWALK AND LANE CLOSURES WITH THE CITY.
- ALL LAWN AREAS, WALKWAYS, DRIVEWAYS, FACILITIES, UTILITIES, AND MEASUREMENTS SHALL BE PROTECTED AND REMAINED UNHARMED OR DAMAGED BY CONTRACTOR AT NO ADDITIONAL EXPENSE TO OWNER.
- EXISTING PAVEMENT SHALL BE REMOVED FROM SITE. PAVEMENT SHALL NOT BE MIXED WITH CONCRETE.
- MATERIAL STORAGE, TEMPORARY FACILITIES, AND LAYDOWN AREAS SHALL BE LOCATED WITHIN THE TEMPORARY CONSTRUCTION FENCING. NO STORAGE OR TEMPORARY FACILITIES MAY BE LOCATED WITHIN THE CITY RIGHT-OF-WAY OR ON ADJACENT PROPERTIES WITHOUT WRITTEN APPROVAL FROM THE OWNER.
- ITEMS TO BE REMOVED SHALL BE KEPT ON SITE FOR FUTURE REUSE. ITEMS TO BE REMOVED SHALL BE KEPT ON SITE FOR FUTURE REUSE. ITEMS TO BE DEMOLISHED SHALL BE DISPOSED OFF-SITE.

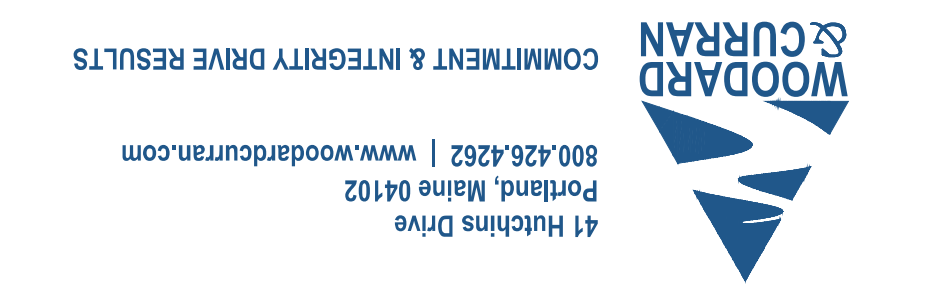

LEVEL II SITE PLAN SUBMITTAL  
AUGUST 9, 2017

CHECK GRAPHIC SCALE BEFORE USING

