


CONTRACTOR NOTE:
PROJECT SURVEYOR SHALL RECORD EXISTING BUILDING CORNER LOCATION BEFORE BUILDING DEMOLITION IN ORDER TO ESTABLISH CORNER OF PROPOSED BUILDING FOUNDATION

CAP ALL EXISTING UTILITIES DURING BUILDING DEMOLITION FOR USE IN PROPOSED BUILDING

- NOTES:**
- EXISTING BUILDING TO BE DEMOLISHED AND REMOVED FROM ENTIRE SITE INCLUDING THE EXISTING BUILDING FOUNDATION.
 - CONTRACTOR SHALL INSPECT EXISTING SANITARY WASTE LINE FROM BUILDING PRIOR TO PROPOSED BUILDING FOUNDATION TO DETERMINE IF LINE IS IN SOUND CONDITION.

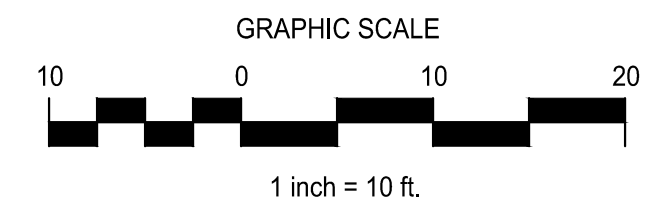

GENERAL NOTES

- BOUNDARY AND TOPOGRAPHY INFO. TAKEN FROM OWEN HASKELL, INC. DATED 4-8-13.
- THE CONTRACT WORK TO BE PERFORMED ON THIS PROJECT CONSISTS OF FURNISHING ALL REQUIRED LABOR, MATERIALS, EQUIPMENT, IMPLEMENTS, PARTS AND SUPPLIES NECESSARY FOR OR APPURTENANT TO, THE INSTALLATION OF CONSTRUCTION IMPROVEMENTS IN ACCORDANCE WITH THESE DRAWINGS AND AS FURTHER ELABORATED IN ANY ACCOMPANYING SPECIFICATIONS.
- THE WORK SHALL BE PERFORMED IN A THOROUGH WORKMANLIKE MANNER. ALL CONTRACTORS TO CONFORM TO ALL APPLICABLE OSHA STANDARDS. ANY REFERENCE TO A SPECIFICATION OR DESIGNATION OF THE AMERICAN SOCIETY FOR TESTING MATERIALS, FEDERAL SPECIFICATIONS, OR OTHER STANDARDS, CODES OR ORDERS, REFERS TO THE MOST RECENT OR LATEST SPECIFICATION OR DESIGNATION.
- ALL CONSTRUCTION WITHIN THE TOWN RIGHT OF WAY SHALL COMPLY WITH TOWN PUBLIC WORKS STANDARDS. ALL CONSTRUCTION WITHIN A STATE RIGHT OF WAY SHALL COMPLY WITH MAINE D.O.T. STANDARDS. ALL UTILITY CONSTRUCTION SHALL CONFORM TO RESPECTIVE UTILITY STANDARDS.
- THE OWNER IS RESPONSIBLE FOR OBTAINING ALL NECESSARY PERMITS REQUIRED BY THE TOWN PRIOR TO CONSTRUCTION. THE CONTRACTOR SHALL OBTAIN ALL NECESSARY PERMITS FROM THE TOWN REQUIRED TO PERFORM THE WORK (STREET OPENINGS, BUILDING PERMIT, ETC.). THE CONTRACTOR SHALL POST ALL BONDS AS REQUIRED, PAY ALL FEES, PROVIDE PROOF OF INSURANCE AND PROVIDE TRAFFIC CONTROL NECESSARY FOR THIS WORK.
- PRIOR TO CONSTRUCTION, THE SITE CONTRACTOR IS TO INFORM ALL AREA UTILITY COMPANIES AND GOVERNMENTAL AGENCIES OF PLANNED CONSTRUCTION. THE SITE CONTRACTOR IS REQUIRED TO CONTACT DIG-SAFE (1-800-225-4977) AT LEAST 3 BUSINESS DAYS PRIOR TO ANY EXCAVATION TO VERIFY ALL UNDERGROUND AND OVERHEAD UTILITY LOCATIONS.
- THE PROJECT DRAWINGS ARE GENERALLY SCHEMATIC AND INDICATE THE POSSIBLE LOCATION OF EXISTING UNDERGROUND UTILITIES. INFORMATION ON EXISTING UTILITIES HAS BEEN COMPILED FROM AVAILABLE INFORMATION INCLUDING UTILITY COMPANY MAPS, MUNICIPAL RECORD MAPS, AND FIELD SURVEY. IT IS NOT GUARANTEED TO BE CORRECT OR COMPLETE. UTILITIES ARE SHOWN TO THEIR PRESENCE. THE CONTRACTOR IS SOLELY RESPONSIBLE FOR DETERMINING ACTUAL LOCATIONS AND ELEVATIONS OF ALL UTILITIES, INCLUDING SERVICES, WHEN THOSE SERVICES ARE TO BE LEFT IN PLACE. THE CONTRACTOR IS TO PROVIDE ADEQUATE SUPPORT AND PROTECTION DURING THE EXCAVATING AND BACKFILLING OPERATIONS. SHOULD ANY UNCHARTED OR INCORRECTLY CHARTED UTILITIES BE FOUND, THE CONTRACTOR SHALL CONTACT THE DESIGN ENGINEER IMMEDIATELY FOR DIRECTIONS BEFORE PROCEEDING FURTHER WITH THE WORK IN THIS AREA.
- OSHA REGULATIONS MAKE IT UNLAWFUL TO OPERATE CRANES, BOOMS, HOISTS, ETC. WITHIN TEN FEET (10') OF ANY ELECTRIC LINE. IF THE CONTRACTOR MUST OPERATE CLOSER THAN 10', THE CONTRACTOR MUST CONTACT THE POWER COMPANY TO MAKE ARRANGEMENTS FOR PROPER SAFEGUARDS BEFORE ENCROACHING ON THIS REQUIREMENT.
- IT IS THE CONTRACTOR'S RESPONSIBILITY TO EXAMINE ALL PLANS, APPROVALS, AND DETAILS FOR ADDITIONAL INFORMATION. THE CONTRACTOR SHALL VERIFY ALL THE SITE CONDITIONS IN THE FIELD AND CONTACT THE DESIGN ENGINEER IF THERE ARE ANY DISCREPANCIES REGARDING THE CONSTRUCTION DOCUMENTS AND/OR FIELD CONDITIONS SO THAT AN APPROPRIATE REVISION CAN BE MADE PRIOR TO BIDDING.
- THE CONTRACTOR SHALL REFERENCE ARCHITECTURAL PLANS FOR EXACT DIMENSIONS AND CONSTRUCTION DETAILS OF THE BUILDING AREA. BUILDING AND DRIVEWAYS SHOWN ARE CONCEPTUAL. ALL SITE DIMENSIONS ARE REFERENCED TO PROPERTY LINES, THE FACE OF CURBS, OUTSIDE FACE OF WALLS, OR EDGE OF PAVING UNLESS OTHERWISE NOTED.
- ALTERNATIVE METHODS AND PRODUCTS OTHER THAN THOSE SPECIFIED MAY BE USED IF REVIEWED AND APPROVED IN WRITING BY THE OWNER, DESIGN ENGINEER, AND APPROPRIATE GOVERNMENTAL AGENCY PRIOR TO INSTALLATION.
- THE CONTRACTOR SHALL RESTORE ALL UTILITY STRUCTURES, PIPE, UTILITIES, PAVEMENT, CURBS, SIDEWALKS, AND LANDSCAPED AREAS DISTURBED BY CONSTRUCTION TO AS GOOD AS BEFORE BEING DISTURBED AS DETERMINED BY CITY CODE ENFORCEMENT OFFICIALS. ANY DAMAGES SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR.
- ALL EXCAVATION SHALL BE BACKFILLED TO EXISTING GRADE BEFORE THE END OF THE DAY OR ADEQUATELY PROTECTED FROM DANGER TO HUMANS AND ANIMALS.
- THE CONTRACTOR SHALL BE RESPONSIBLE FOR PROVIDING ALL FIELD LAYOUT. THE OWNER WILL PROVIDE A BENCH MARK AT THE CONSTRUCTION SITE FROM WHICH TO BEGIN LAYOUT.
- THE CONTRACTOR SHALL GUARANTEE THE FAITHFUL REMEDY OF ANY DEFECTS DUE TO FAULTY MATERIALS OR WORKMANSHIP AND GUARANTEES PAYMENT FOR ANY RESULTING DAMAGE WHICH SHALL APPEAR WITHIN A PERIOD OF ONE (1) YEAR FROM THE DATE OF SUBSTANTIAL COMPLETION OF THE PROJECT.
- THE CONTRACTOR SHALL PROVIDE AS-BUILT RECORDS OF ALL CONSTRUCTION (INCLUDING UNDERGROUND UTILITIES) TO THE OWNER AT THE END OF CONSTRUCTION.
- A PRE-CONSTRUCTION CONFERENCE WITH THE OWNER, DESIGNERS, TOWN OFFICIALS AND CONTRACTOR SHALL BE REQUIRED BEFORE ANY CONSTRUCTION OCCURS ON THE PROJECT. DURING CONSTRUCTION THERE SHALL BE WEEKLY PROGRESS MEETINGS WITH THE OWNER (ON SITE OR TELECONFERENCE) UNTIL PROJECT COMPLETION.
- PROPER IMPLEMENTATION AND MAINTENANCE OF EROSION CONTROL MEASURES ARE OF PARAMOUNT IMPORTANCE FOR THIS PROJECT. THE CONTRACTOR IS RESPONSIBLE FOR COMPLYING WITH ALL EROSION CONTROL MEASURES SHOWN ON THE PLANS. ADDITIONAL EROSION CONTROL MEASURES SHALL BE INSTALLED IF DEEMED NECESSARY BY ONSITE INSPECTIONS OF THE OWNER, THEIR REPRESENTATIVES, OR STATE/LOCAL/ FEDERAL INSPECTORS AT NO ADDITIONAL COST TO THE OWNER.

LEGEND		
EXISTING	DESCRIPTION	PROPOSED
□	GRANITE MONUMENT - 3' OFFSET	■
○ PFF	IRON PIN FOUND/SET	○ PS
○ IRF	IRON ROD FOUND	
☆ CRF	CAPED IRON ROD FOUND	
○ DHF	DRILL HOLE FOUND	
□ MON	GRANITE MONUMENT FOUND	
---	STREET LINE	---
---	LOT SETBACKS	---
---	PROPERTY LINE	---
---	ABUTTOR LINE	---
---	"NO CUT" BUFFER	---
	WETLANDS	
---	EDGE OF ROAD/TRAVELLED WAY	---
● 69	SOIL TEST PIT	● 69
---	CONTOUR	---
327x60 x 327.6	SPOT GRADE	327x60 x 327.6
⊙ GAS	GAS SHUT-OFF	⊙ GAS
○ UP	UTILITY POLE	○ UP
---	OVERHEAD ELECTRICAL	---
--- UE&T ---</td <td>UNDERGROUND ELECTRICAL</td> <td>---<!-- UE&T ---</td--> </td>	UNDERGROUND ELECTRICAL	--- UE&T ---</td
□	ELECTRICAL TRANSFORMER	□
○	FIRE HYDRANT	○
--- 8"-W 8" W ---</td <td>WATER LINE</td> <td>---<!-- 8"-W 8" W ---</td--> </td>	WATER LINE	--- 8"-W 8" W ---</td
○	WATER GATE	○
FA	FIRE ALARM	FA
--- 12" S ---</td <td>SEWER LINE</td> <td>---<!-- 12" S ---</td--> </td>	SEWER LINE	--- 12" S ---</td
○ DMH	SEWER MANHOLE	○ DMH-1
○ DMH	DRAINAGE MANHOLE	○ DMH-1
■ CB	CATCH BASIN	■ CB-1
--- UD/SD ---</td <td>UNDERDRAIN/STORMDRAIN</td> <td>---<!-- UD/SD ---</td--> </td>	UNDERDRAIN/STORMDRAIN	--- UD/SD ---</td
--- UD ---</td <td>UNDERDRAIN</td> <td>---<!-- UD ---</td--> </td>	UNDERDRAIN	--- UD ---</td
--- </td <td>SILT FENCE</td> <td>---<!--</td--> </td>	SILT FENCE	--- </td
--- </td <td>TEMP. STONE CHECK DAM</td> <td>---<!--</td--> </td>	TEMP. STONE CHECK DAM	--- </td
--- </td <td>GRADING AND FLOW DIRECTION</td> <td>---<!--</td--> </td>	GRADING AND FLOW DIRECTION	--- </td
--- </td <td>EROSION CONTROL BLANKET</td> <td>XXXXXX</td>	EROSION CONTROL BLANKET	XXXXXX
--- </td <td>STORMWATER BOUNDARY</td> <td>---<!--</td--> </td>	STORMWATER BOUNDARY	--- </td
--- </td <td>STORMWATER FLOW (T₀)</td> <td>---<!--</td--> </td>	STORMWATER FLOW (T ₀)	--- </td
--- </td <td>FACE OF LEDGE OUTCROP</td> <td>---<!--</td--> </td>	FACE OF LEDGE OUTCROP	--- </td
○	BIRCH	○
○	MAPLE	○
--- </td <td>TREE LINE</td> <td>---<!--</td--> </td>	TREE LINE	--- </td
□	SITE LIGHTING (BAYSIDE FIXTURE)	□
--- </td <td>STONE WALL</td> <td>---<!--</td--> </td>	STONE WALL	--- </td


227 York Street
 Residence - Portland, Maine

Architect:
 Reiter Architecture & Design
 PO Box 275 -- Brooklin, ME 04616
 Tel. 207.359.2300

Structural & Civil Engineer:
 Casco Bay Engineering
 424 Fore Street -- Portland, ME 04101
 Tel. 207.842.2800

MEP & Sprinkler Engineer:
 Bennett Engineering
 PO Box 297 -- Freeport, ME 04032
 Tel. 207.865.9475

Drwg Date / Issued by / Drwg Issue
 MAY 10, 2013 / FOR BUILDING
 DEPT. REVIEW AND BIDDING
 ONLY/ NOT FOR CONSTRUCTION

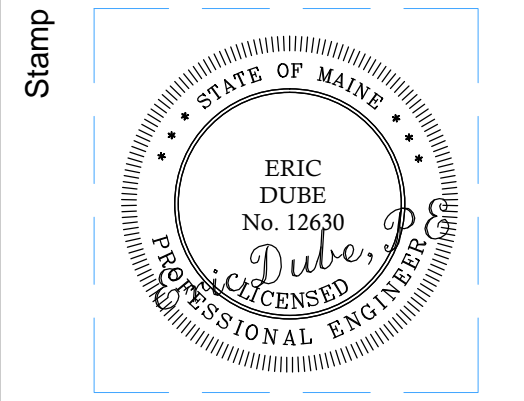

Drawing Title
Existing Site Plan
 Drawing Number
C100