City of Portland, Maine - Building or Use Permit Application 389 Congress Street, 04101, Tel: (207) 874-8703, FAX: 874-8716 Location of Construction: Permit No:9 9 0 65 5 Phone: Owner: Owner Address: Lessee/Buyer's Name: Phone: BusinessName: DEDMAIT ICCHE Permit Issued: Contractor Name: Phone: 92 Mithodist Road Westbrook His JIN 2 3 1999 COST OF WORK: PERMIT FEE: Past Use: Proposed Use: \$ 5.600.00 \$ 50.00 457 (Med **FIRE DEPT.** □ Approved INSPECTION: sane ☐ Denied Use Group: Type: Zone: CBL: Signature: Signature: Zoning Approval: Proposed Project Description: PEDESTRIAN ACTIVITIES DISTRICT (P.A.D.) Approved Action: Special Zone or Reviews: Approved with Conditions: ☐ Shoreland Reconstruction of 2 story deck Denied □ Wetland ☐ Flood Zone [€] ☐ Subdivision & Signature: Date: ☐ Site Plan mai ☐minor ☐mm ☐ Permit Taken By: Date Applied For: June 17. 1999 NA **Zoning Appeal** ☐ Variance This permit application does not preclude the Applicant(s) from meeting applicable State and Federal rules. ☐ Miscellaneous Building permits do not include plumbing, septic or electrical work. ☐ Conditional Use Building permits are void if work is not started within six (6) months of the date of issuance. False informa-☐ Interpretation ☐ Approved tion may invalidate a building permit and stop all work.. ☐ Denied Historic Preservation Not in District or Landmark ☐ Does Not Require Review PERMIT ISSUED ☐ Requires Review WITH REQUIREMENTS Action: CERTIFICATION ☐ Appoved ☐ Approved with Conditions I hereby certify that I am the owner of record of the named property, or that the proposed work is authorized by the owner of record and that I have been ☐ Denied authorized by the owner to make this application as his authorized agent and I agree to conform to all applicable laws of this jurisdiction. In addition, if a permit for work described in the application is issued, I certify that the code official's authorized representative shall have the authority to enter all Date: areas covered by such permit at any reasonable hour to enforce the provisions of the code(s) applicable to such permit Juan 17, 1999 SIGNATURE OF APPLICANT ADDRESS: DATE: PHONE: RESPONSIBLE PERSON IN CHARGE OF WORK, TITLE PHONE: **CEO DISTRICT**

12/31/83 - Work has been Consequence of The permite to	releted &	Lappenstone	zek
requirements or The Donate The	ma	0 9	
gettiet e.		\wedge	
		1 1.00 de 0	
CAN H-M		Cut of the contract of the con	
CDU#126-Fic	2CJ		
			1
Romet # 9900	655		
1 11000			
			7/4

	•		
		Increation Decemb	
	Ty_{l}	Inspection Record pe	Date
			Date
	Framing:		
	Plumbing:		
		·	
	Other:		

BUILDING PERMIT REPORT			
on to 100 mpress. 428-430 wood ford ST. CBL: 176-F-008			
DATE: 22 /June / 99 ADDRESS: 428-430 Wood Ford ST. CBL: 176-F-008 REASON FOR PERMIT: Be con STruction of 2 STony deck			
/ 3 1/			
BIII DII GOVILLA CONTRACTOR CONTR			
PERMIT APPLICANT: Ivan Wes Iman			
USE GROUP R-3 BOCA 1996 CONSTRUCTION TYPE 5 B			
CONDITION(S) OF APPROVAL			
This permit is being issued with the understanding that the following conditions are met:			
Approved with the following conditions: */ *// *// *// *// *// *// *// *// *//			
the applicant from meeting applicable State and redetal fulls and factors of the applicant from meeting applicable State and redetal fulls and factors of the applicant from meeting applicable State and redetal fulls and factors of the applicant from meeting applicable State and redetal fulls and factors of the applicant from meeting applicable State and redetal fulls and factors of the applicant from meeting applicable State and redetal fulls and factors of the applicant from meeting applicable State and redetal fulls and factors of the applicable State and the applic			
Refore concrete for foundation is placed, approvals from the Development			
24 hour notice is required prior to inspection.			
3. Foundation drain shall be placed around the perimeter of a foundation that consists of gravel of clusted stone containing. The percent material that passes through a No. 4 sieve. The drain shall extend a minimum of 12 inches beyond the outside edge of the footing. The percent material that passes through a No. 4 sieve. The drain is not higher than the bottom of the base under the floor, and that the top of the drain is not			
thickness shall be such that the bottom of the than is not highly the controlled filter membrane material. Where a drain			
less than 6 inches above the top of the fooding. The top of the database of the top of joints or top of perforations			
tile or perforated pipe is used, the invert of the pipe or tile shall not be higher than the noor elevation. The top or journal tile or perforated pipe is used, the invert of the pipe or tile shall be placed on not less than 2" of gravel or crushed stone, and shall be protected with an approved filter membrane material. Section 1813.5.2			
shall be protected with an approved inter memorate interface of the same material. Section 1813.5.2 shall be covered with not less than 6" of the same material. Section 1813.5.2 shall be covered with not less than 6" of the same material. Section 1813.5.2			
The define anchors shall be a minimum of 1/2 in manicion, I mis me a second			
4. Foundations and the state of			
Waterproofing and dampproofing shall be done in accordance with boolean 1919.			
 Waterproofing and dampproofing shall be deferm freezing. Section 1908.0 Precaution must be taken to protect concrete from freezing. Section 1908.0 It is strongly recommended that a registered land surveyor check all foundation forms before concrete is placed. This is done to verify that the 			
It is strongly recommended that a registered fand surveyor encountry			
proper setbacks are maintained. 8. Private garages located beneath habitable rooms in occupancies in Use Group R-1, R-2, R-3 or I-1 shall be separated from adjacent interior Private garages located beneath habitable rooms in occupancies in Use Group R-1, R-2, R-3 or I-1 shall be separated from adjacent interior Private garages located beneath habitable rooms in occupancies in Use Group R-1, R-2, R-3 or I-1 shall be separated from adjacent interior Private garages located beneath habitable rooms in occupancies in Use Group R-1, R-2, R-3 or I-1 shall be separated from adjacent interior Private garages located beneath habitable rooms in occupancies in Use Group R-1, R-2, R-3 or I-1 shall be separated from adjacent interior			
8. Private garages located beneath habitable rooms in occupancies in Use Group R-1, R-2, R-3 of 1-1 shall be separated. Private garages located beneath habitable rooms in occupancies in Use Group R-1, R-2, R-3 of 1-1 shall be separated garages attached spaces by fire partitions and floor/ceiling assembly which are constructed with not less than 1-hour fire resisting rating. Private garages attached spaces by fire partitions and floor/ceiling assembly which are constructed with not less than 1-hour fire resisting rating. Private garages attached spaces by fire partitions and floor/ceiling assembly which are constructed with not less than 1-hour fire resisting rating. Private garages attached spaces by fire partitions and floor/ceiling assembly which are constructed with not less than 1-hour fire resisting rating.			
spaces by fire partitions and floor/ceiling assembly which are constructed with not less than 1-hour me resolutions and floor/ceiling assembly which are constructed with not less than 1-hour me resolutions and the attic area by means of ½ inch side-by-side to rooms in the above occupancies shall be completely separated from the interior spaces and the attic area by means of ½ inch gypsum board or the equivalent applied to the garage side. (Chapter 4,			
gradim board or the equivalent applied to the galage method of 12 = 251			
Section 407.0 of the BOCA/1996) Section 407.0 of the BOCA/1996) All chimneys and vents shall be installed and maintained as per Chapter 12 of the City's Mechanical Code. (The BOCA National Mechanical All chimneys and vents shall be installed and maintained as per Chapter 12 of the City's Mechanical Code. (The BOCA National Mechanical All chimneys and vents shall be installed and maintained as per Chapter 12 of the City's Mechanical Code. (The BOCA National Mechanical Code)			
9. All chimneys and vents shall be installed and maintained as per chimper 12 of the same and same at the same and same at the			
Code/1993). Chapter 12 & NFPA 211 Code/1993). Chapter 12 & NFPA 211 Sound transmission control in residential building shall be done in accordance with Chapter 12, Section 1214.0 of the City's Building Code. Sound transmission control in residential building shall be done in accordance with Chapter 12, Section 1214.0 of the City's Building Code.			
10. Sound transmission control in residential building shall be done in accordance with Chapter 12, Section 1214.0 of the Sound transmission control in residential building shall be done in accordance with Chapter 12, Section 1214.0 of the Sound transmission control in residential building shall be done in accordance with Chapter 12, Section 1214.0 of the Sound transmission control in residential building shall be done in accordance with Chapter 12, Section 1214.0 of the Sound transmission control in residential building shall be done in accordance with Chapter 12, Section 1214.0 of the Sound transmission control in residential building shall be done in accordance with Chapter 12, Section 1214.0 of the Sound transmission control in residential building shall be done in accordance with Chapter 12, Section 1214.0 of the Sound transmission control in residential building shall be done in accordance with Chapter 12, Section 1214.0 of the Sound transmission control in residential building shall be done in accordance with Chapter 12, Section 1214.0 of the Sound transmission control in residential building shall be done in accordance with Chapter 12, Section 1214.0 of the Sound transmission control in residential building shall be done in accordance with Chapter 12, Section 1214.0 of the Sound transmission control in residential building shall be done in accordance with Chapter 12, Section 1214.0 of the Sound transmission control in residential building shall be done in accordance with Chapter 12, Section 1214.0 of the Sound transmission control in residential building shall be done in accordance with Chapter 12, Section 1214.0 of the Sound transmission control in residential building shall be done in accordance with Chapter 12, Section 1214.0 of the Sound transmission control in residential building shall be done in accordance with Chapter 12, Section 1214.0 of the Sound transmission control in residential building shall be done in accordance with Chapter 12, Section 1214.0 of the Sound transmission control in reside			
Guardrails & Handrails: A guardrail system is a system of building components located near the open sides of the lower level. Minimum height all Use Groups 42", purpose of minimizing the possibility of an accidental fall from the walking surface to the lower level. Minimum height all Use Groups 42", purpose of minimizing the possibility of an accidental fall from the walking surface to the lower level. Minimum height all Use Groups 42", purpose of minimizing the possibility of an accidental fall from the walking surface to the lower level. Minimum height all Use Groups 42",			
avent I se Group R which is 30°. In occupancies in CSO Crop 17-7-19-19-19-19-19-19-19-19-19-19-19-19-19-			
onen guards shall have balusters of be of solid matched such that a such a such as a such a such as a such			
not have an ornamental pattern that would provide a NAT and give their gives a circular cross section with an outside diameter of at least 1			
not have an ornamental pattern that would provide a ladder effect. (Handrails shall be a minimum of 364 but no state diameter of at least 1 3 shall not be less than 30", but not more than 38".) Handrail grip size shall have a circular cross section with an outside diameter of at least 1 3 shall not be less than 30", but not more than 38".) Handrails shall be on both sides of stairway. (Section 1014.7) 1/4" and not greater than 2". (Sections 1021 & 1022.0) - Handrails shall be on both sides of stairway.			
12. Headroom in habitable space is a minimum of 7'6". (Section 1204.0) 12. Headroom in habitable space is a minimum of 7'6". (Section 1204.0) 13. Headroom in habitable space is a minimum of 10" tread and 7 %" maximum rise. All other Use Group minimum 11" tread,			
13. Stair construction in Use Group R-3 & R-41s a Human Research Property of the Stair construction in Use Group R-3 & R-41s a Human Research Property of the Stair construction in Use Group R-3 & R-41s a Human Research Property of the Stair construction in Use Group R-3 & R-41s a Human Research Property of the Stair construction in Use Group R-3 & R-41s a Human Research Property of the Stair construction in Use Group R-3 & R-41s a Human Research Property of the Stair construction in Use Group R-3 & R-41s a Human Research Property of the Stair construction in Use Group R-3 & R-41s a Human Research Property of the Stair construction in Use Group R-3 & R-41s a Human Research Property of the Stair construction in Use Group R-3 & R-41s a Human Research Property of the Stair Construction in Use Group R-3 & R-41s a Human Research Property of the Stair Construction in Use Group R-3 & R-41s a Human Research Property of the Stair Construction Property of th			
The minimum headroom in all parts of a stairway shall not be less than 80 inches. (68%) 1014.4			
Towardsoning room below the fourth story in buildings of oso of the story in buildings of separate tools.			
annroyed for emergency egress of rescue. The times made to a serious than 44 inches (1118mm) above the noon and			
Where windows are provided as inexas of ceross of the control of 74 inches to 10 limits.			
The second of taccile windows from Sicepting Iooms and I are second of 5 / 50 II. (Section Iooms)			
minimum net clear opening width dimension shall be greated and approved means of egress. A single exit is acceptable when it exits the exit is acceptable when			
Tech enortment shall have access to two (2) separately and the continuous access to two (2) separately			
17. All vertical openings shall be enclosed with constitution in height requirements for fire rating is two (2) hours.) (Section 710.0) (Over 3 stories in height requirements for fire rating is two (2) hours.)			
(Over 5 Stones in noisure 17 and ceiling or hyproviding automatic			
The boiler shall be protected by enclosing with (1)hour fire rated construction including fire doors and ceiling, or by providing automatic			
1 depart (Toble 307 1 1)			
18. The boiler shall be protected by encrosing water (7) extinguishment. (Table 302.1.1) All single and multiple station smoke detectors shall be of an approved type and shall be installed in accordance with the provisions of the City' All single and multiple station smoke detectors shall be The boiler shall be protected by encrosing with the provisions of the City' extinguishment. (Table 302.1.1) 19. All single and multiple station smoke detectors shall be of an approved type and shall be installed in accordance with the provisions of the City' 19. All single and multiple station smoke detectors shall be of an approved type and shall be installed in accordance with the provisions of the City' 19. All single and multiple station smoke detectors shall be of an approved type and shall be installed in accordance with the provisions of the City' 19. All single and multiple station smoke detectors shall be of an approved type and shall be installed in accordance with the provisions of the City'			
extinguishment. (Table Society) All single and multiple station smoke detectors shall be of an approved type and shall be installed in accordance with the provided that the provided shall be an approved type and shall be installed in accordance with the provided that the provided shall be installed in accordance with the provided shall be of an approved type and shall be installed in accordance with the provided shall be of an approved type and shall be installed in accordance with the provided shall be of an approved type and shall be installed in accordance with the provided shall be of an approved type and shall be installed in accordance with the provided shall be of an approved type and shall be installed in accordance with the provided shall be of an approved type and shall be installed in accordance with the provided shall be of an approved type and shall be installed in accordance with the provided shall be of an approved type and shall be of an approved			

installed and maintained at the following locations):

- In the immediate vicinity of bedrooms
- In all bedrooms
 - In each story within a dwelling unit, including basements

In addition to the required AC primary power source, required smoke detectors in occupancies in Use Groups R-2, R-3 and I-1 shall receive power from a battery when the AC primary power source is interrupted. (Interconnection is required) Section 920.3.2.

- A portable fire extinguisher shall be located as per NFPA #10. They shall bear the label of an approved agency and be of an approved type. (Section 921.0)
- 21. The Fire Alarm System shall maintained to NFPA #72 Standard.
- 22. The Sprinkler System shall maintained to NFPA #13 Standard.
- 23. All exit signs, lights and means of egress lighting shall be done in accordance with Chapter 10 Section & Subsections 1023.0 & 1024.0 of the City's Building Code. (The BOCA National Building Code/1996)
- 24. Section 25-135 of the Municipal Code for the City of Portland states, "No person or utility shall be granted a permit to excavate or open any street or sidewalk from the time of November 15 of each year to April 15 of the following year".
- 25. The builder of a facility to which Section 4594-C of the Maine State Human Rights Act Title 5 MRSA refers, shall obtain a certification from a design professional that the plans commencing construction of the facility, the builder shall submit the certification the Division of Inspection Services.
- 26. Ventilation shall meet the requirements of Chapter 12 Sections 1210.0 of the City's Building Code. (Crawl spaces & attics).
- 27. All electrical, plumbing and HVAC permits must be obtained by a Master Licensed holders of their trade. No closing in of walls until all electrical (min. 72 hours notice) and plumbing inspections have been done.
- 28. All requirements must be met before a final Certificate of Occupancy is issued.
- All building elements shall meet the fastening schedule as per Table 2305.2 of the City's Building Code (the BOCA National Building Code/1996).
 - 30. Ventilation of spaces within a building shall be done in accordance with the City's Mechanical Code (The BOCA National Mechanical Code/1993). (Chapter M-16)
- #31. Please read and implement the attached Land Use Zoning report requirements.
 - 32. Boring, cutting and notching shall be done in accordance with Sections 2305.4.4, 2305.5.1 and 2305.5.3 of the City's Building Code.
- 33. Glass and glazing shall meet the requirements of Chapter 24 of the building code.
- 1 34. This permit is boing issued with The understanding That The existing Foundation piers are being used-

36.

Hoffset Building Inspector

Marge Schmuckal, Zoning Administrator

PSH 12-14-98

^{**}On the basis of plans submitted and conditions placed on these plans any deviations shall require a separate approval.


LAND USE - ZONING REPORT REASON FOR PERMIT: (20 BUILDING OWNER: PERMIT APPLICANT: $\stackrel{\textstyle >}{\sim}$ DENIED:_ 73, 世7, #11 CONDITION(S) OF APPROVAL This permit is being approved on the basis of plans submitted. Any deviations shall require a separate approval before starting that work. During its existence, all aspects of the Home Occupation criteria, Section 14-410, shall be maintained. The footprint of the existing Decks shall not be increased during maintenance reconstruction. All the conditions placed on the original, previously approved, permit issued on _____ 4. are still in effect for this amendment. Your present structure is legally nonconforming as to rear and side setbacks. If you were 5. to demolish the building on your own volition, you will not be able to maintain these same setbacks. Instead you would need to meet the zoning setbacks set forth in today's ordinances. In order to preserve these legally non-conforming setbacks, you may only rebuild the _____ in place and in phases. This property shall remain a single family dwelling. Any change of use shall require a 6. separate permit application for review and approval. Our records indicate that this property has a legal use of $\pm\omega$ units. Any change 7. in this approved use shall require a separate permit application for review and approval. Separate permits shall be required for any signage. 8. Separate permits shall be required for future decks, sheds, pool(s), and/or garage. 9. This is not an approval for an additional dwelling unit. You shall not add any additional 10. kitchen equipment, such as stoves, microwaves, refrigerators, or kitchen sinks, etc. Other requirements of condition There Shall be No who con 11. Marge Schmuckal, Zoning Administrator

Proposal
Ivan J. Westman 854-4332
Carpenter & Builder
1192 Methodist Road
Westbrook, Maine
04092

Customer 5/EUC GIKIS
Customer 5/6/6 6/K i 5 728 2 430 200 8 For \$ 5
Portland
Date-6/16/22 Location-5a m e
Job Description:
Remove a forche 5
Farnish & install New Porches, all
done with fressure Treated Lumber also the small set of steps sext To Porch Material: on the 1st Floor
also The Small SET OF STEPS NEXT TO POUL
Material: of the 15T Floor
Half when 1st Floor Porch is secure

Total Estimate \$----

Signiture

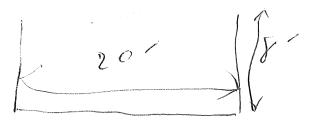

Railings + Balasters
187 Flook + 2nd Floor

Balasters 3½" apait 42" HiGh U

Bal Around Deck

2x6 Deck Flaming MAX SPAN 286

4x6 Carriers @ 1600 29'4"

5/4 6" Deck Boards W


Proposal
Ivan J. Westman 854-4332
Carpenter & Builder
1192 Methodist Road
Westbrook, Maine
04092

Customer-Steve Gikis 4282430 WoodFords ST
Portland
Date-6/16/19 Location-59me
Job Description:
Job Description: Pemove (water danaged) wood ceiling on 1st Floor Porch + Replace Furnish material + Labor + clear up
Material:

1,650

Total Estimate \$-

Signiture

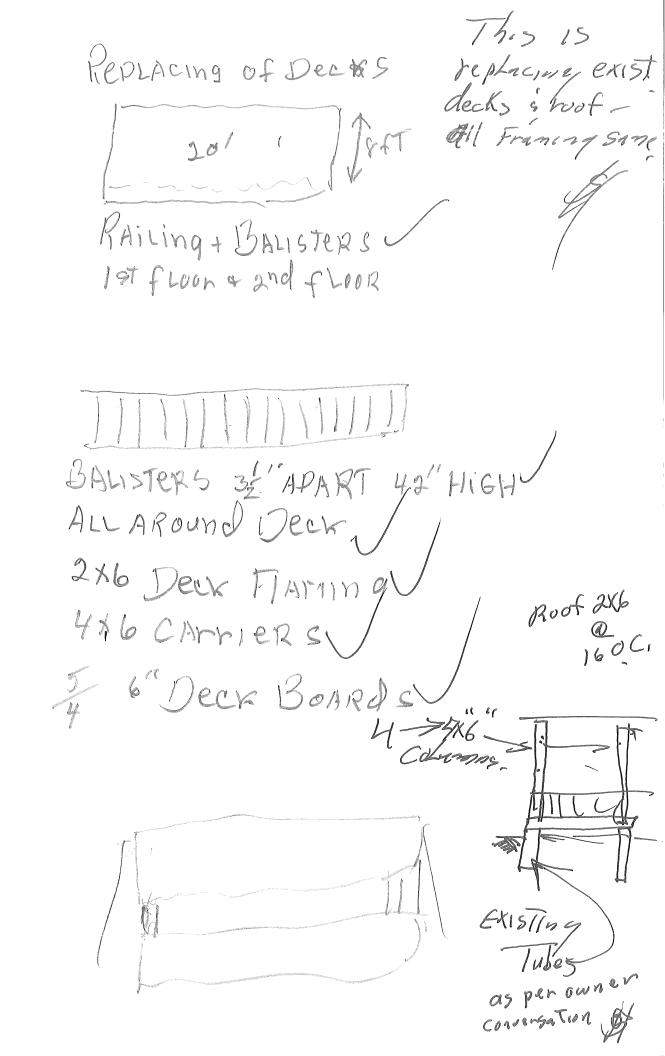

THIS IS NOT A PERMIT/CONSTRUCTION CANNOT COMMENCE UNTIL THE PERMIT IS ISSUED

#3

Building or Use Permit Pre-Application

Attached Single Family Dwellings/Two-Family Dwelling

Multi-Family or Commercial Structures and Additions Thereto

In the interest of processing your application in the quickest possible manner, please complete the Information below for a Building or Use Permit.

NOTE**If you or the property owner owes real estate or personal property taxes or user charges on ANY PROPERTY within the City, payment arrangements must be made before permits of any kind are accepted.

Location/Addressof Construction (include Portion of Building):	428-430 Woods	ndSt		
Total Square Footage of Proposed Structure	Square Footage of Lot	·		
Tax Assessor's Chart, Block & Lot Number	Owner:	Telephone#:		
Chart# / Block# F Lot#008	STEFANOS GIVA!	9 883-2893		
Owner's Address:	Lessee/Buyer's Name (If Applicable)	Cost Of Work: Fee		
2 Co AVC		\$ 5,600.00 \$50		
SCAR Bulough, Me 0401	7	T C		
Proposed Project Description:(Please be as specific as possible)	((5 6 / 1)			
Re Construct del	(2-5679)			
1 1/10 00 10 10 10 10 10 10 10 10 10 10 10 1				
Contractor's Name, Address & Telephone		Doold Dec		
Contractor's Name, Address & Telephone 1 LAN J. WCSIMAN 1192 METhod's TRd WESTBrook 1 1 eRec'd By				
Current Use: 2 - family	Proposed Use:	2220		
Separate permits are required for Internal & External Plumbing, HVAC and Electrical installation. •All construction must be conducted in compliance with the 1996 B.O.C.A. Building Code as amended by Section 6-Art II. •All plumbing must be conducted in compliance with the State of Maine Plumbing Code. •All Electrical Installation must comply with the 1996 National Electrical Code as amended by Section 6-Art III. •HVAC(Heating, Ventililation and Air Conditioning) installation must comply with the 1993 BOCA Mechanical Code. You must Include the following with you application: 1) ACopy of Your Deed or Purchase and Sale Agreement 2) A Copy of your Construction Contract, if available 3) A Plot Plan/Site Plan Minor or Major site plan review will be required for the above proposed projects. The attached checklist outlines the minimum standards for a site plan. 4) Building Plans Unless exempted by State Law, construction documents must be designed by a registered design professional.				
A complete set of construction drawings showing all of the following elements of construction:				
 Cross Sections w/Framing details (including porches, decks w/ railings, and accessory structures) Floor Plans & Elevations 				
Window and door schedules				
Foundation plans with required drainage and dampproofing				
 Electrical and plumbing layout. Mechanical drawings for any specialized equipment such as furnaces, chimneys, gas 				
equipment, HVAC equipment (air handling) or other types of work that may require special review must be included.				

Building Permit Fee: \$25.00 for the 1st \$1000.cost plus \$5.00 per \$1,000.00 construction cost thereafter.

Additional Site review and related fees are attached on a separate addendum

Certification

I hereby certify that I am the Owner of record of the named property, or that the proposed work is authorized by the owner of record and that I have been authorized by the owner to make this application as his/her authorized agent. I agree to conform to all applicable laws of this jurisdiction. In addition, if a permit for work described in this application is issued, I certify that the Code Official's authorized representative shall have the authority to enter all areas covered by this permit at any reasonable hour to

enforce the provisions of the codes applicable to this permit.

Signature of applicant:

1

Date: