




**GAWRON
TURGEON
ARCHITECTS**

29 Black Point Road
Scarborough, ME 04074
www.gawronturgeon.com
Tel. 207 . 883 . 6307
Fax. 207 . 883 . 0361

SEVENTY-FIVE STATE STREET

CUTTER HOUSE RENOVATION
PORTLAND MAINE

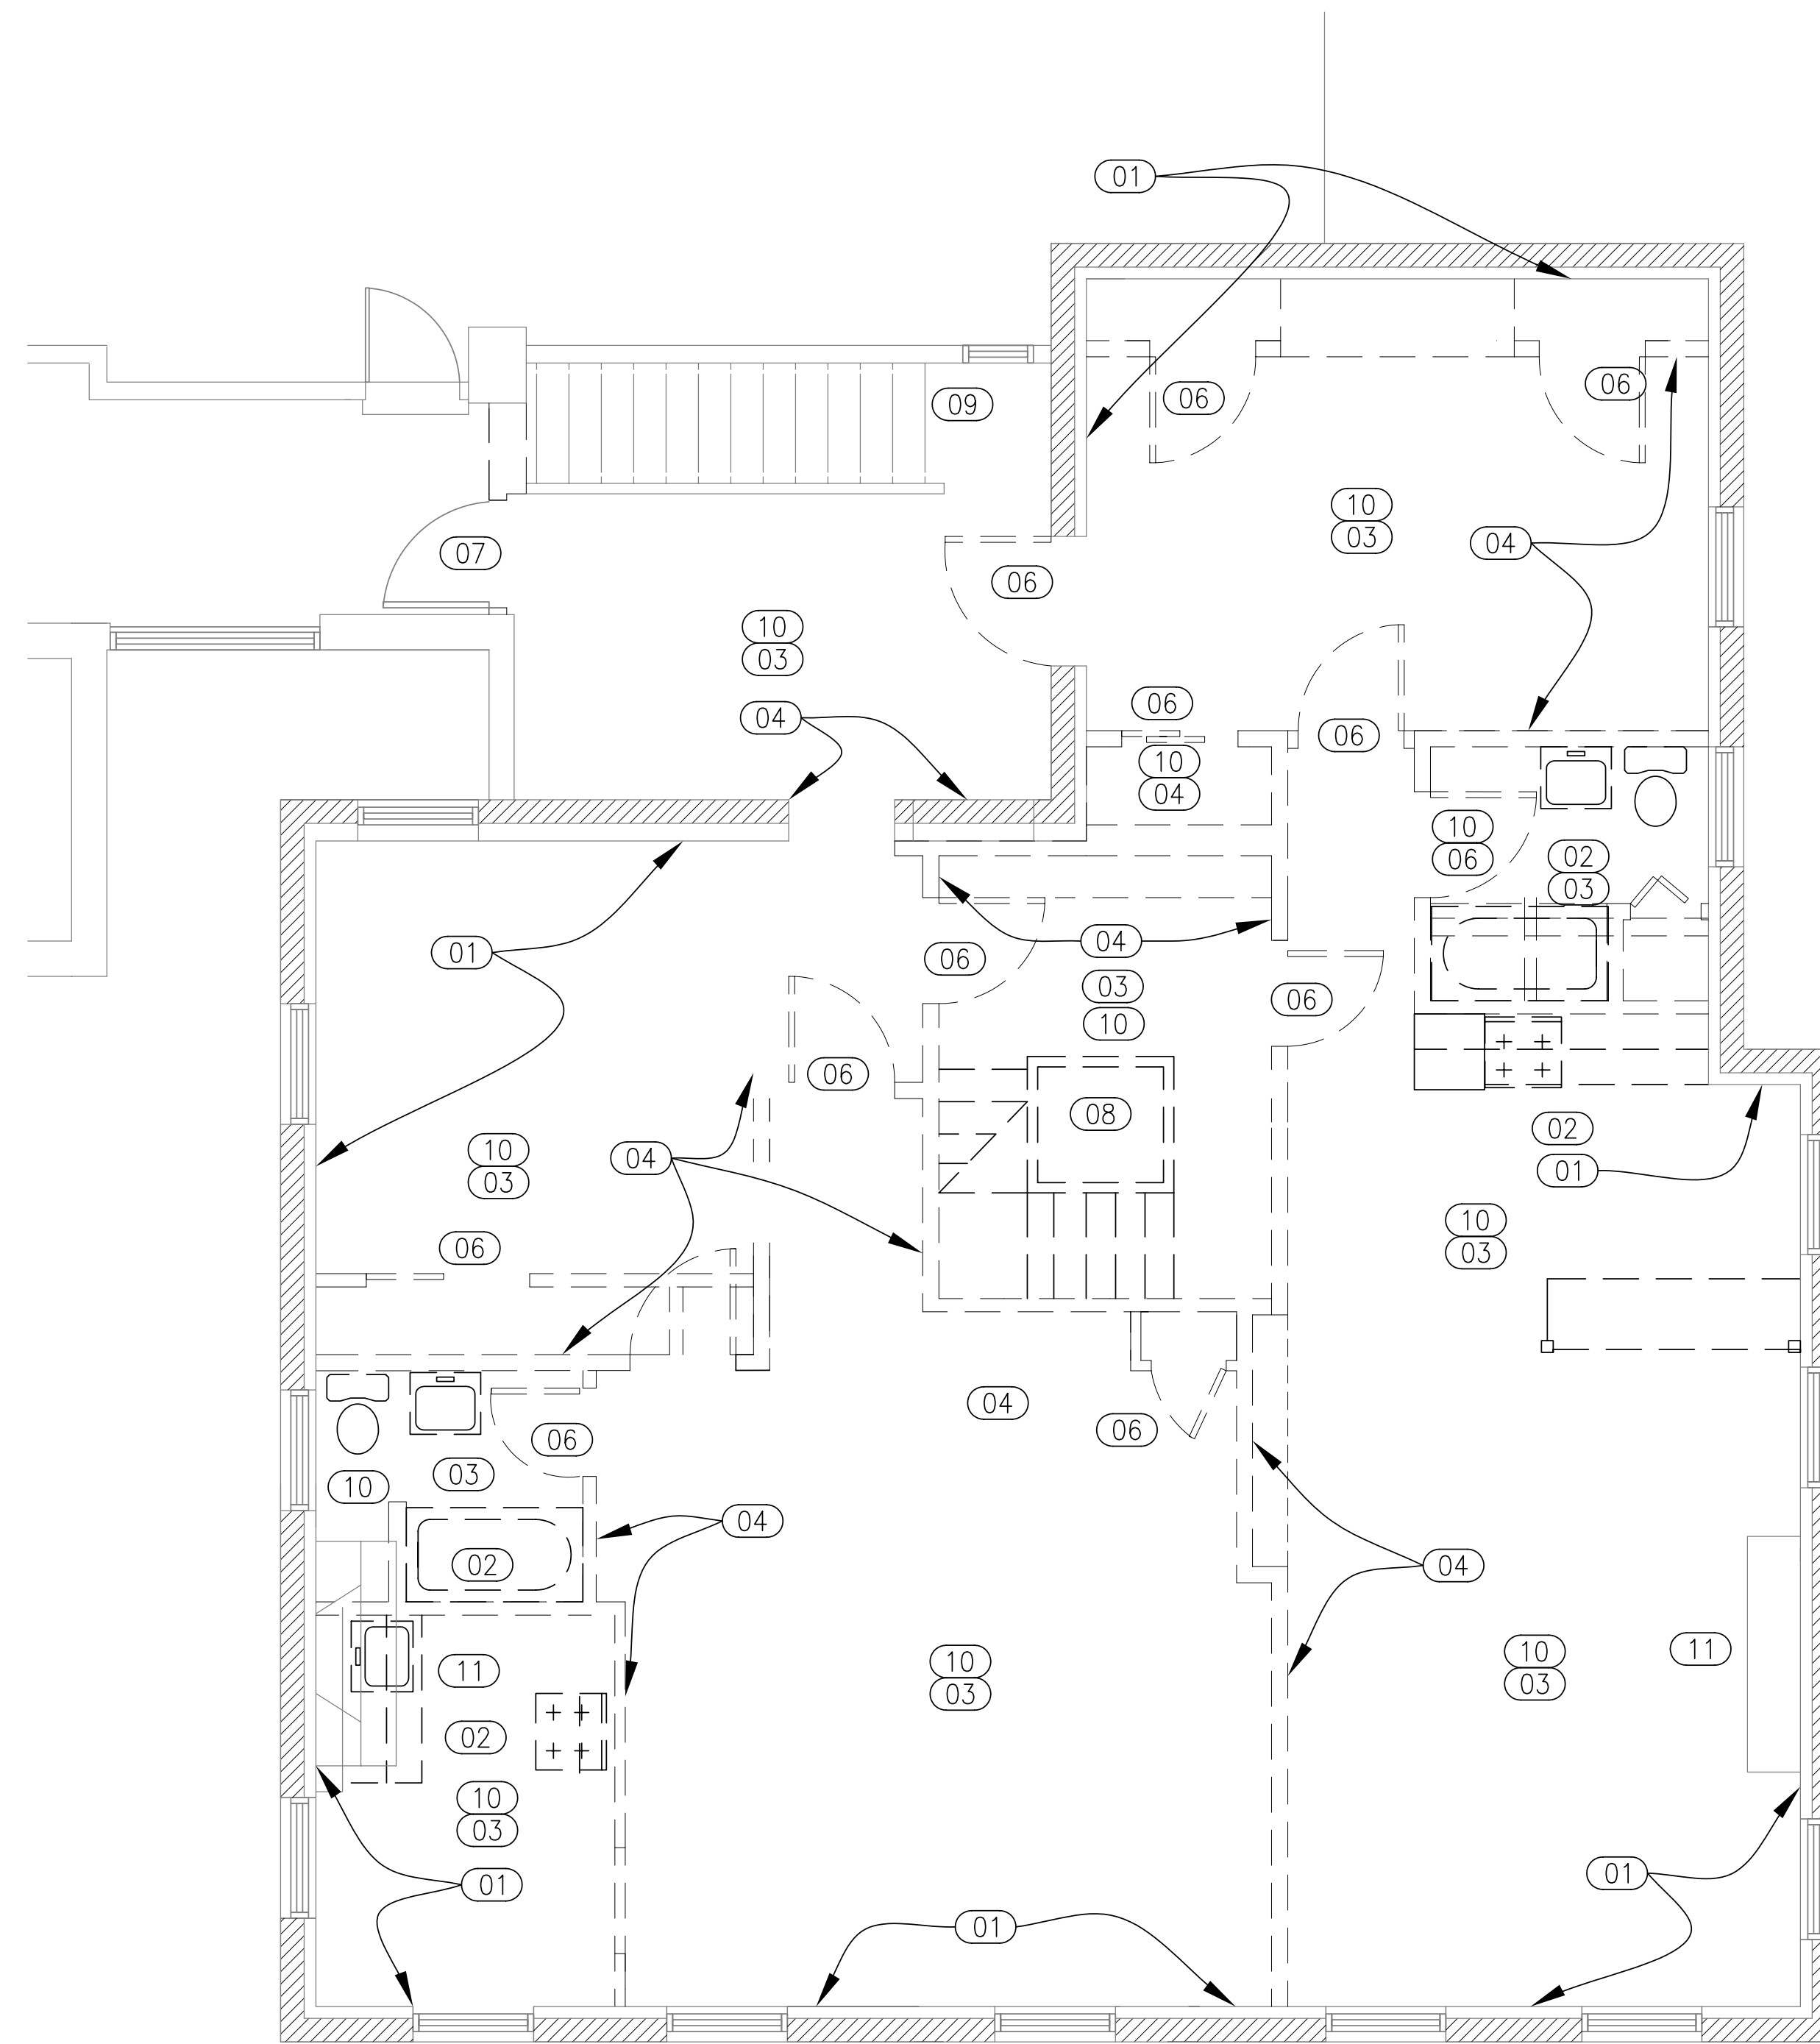

DEMO KEY LEGEND

- 01 REMOVE ALL EXTERIOR DRYWALL OR PLASTER AND FURRING STRIPS DOWN TO THE EXISTING BRICK EXTERIOR WALL
- 02 REMOVE AND DISPOSE OF ALL EXISTING KITCHEN AND BATHROOM FIXTURES AND APPLIANCES
- 03 REMOVE ANY EXISTING FINISHED FLOOR INCLUDING CARPET AND SHEET VINYL
- 04 REMOVE EXISTING SHEETROCK AND/OR PLASTER DOWN TO EXISTING INTERIOR STUDS AND/OR MASONRY BOTH SIDES
- 05 EXISTING SHEETROCK/PLASTER TO REMAIN
- 06 REMOVE EXISTING DOOR
- 07 EXISTING DOOR TO REMAIN
- 08 EXISTING STAIR TO BE REMOVED
- 09 EXISTING STAIRS TO REMAIN. PROTECT DURING DEMOLITION.
- 10 REMOVE ALL DRYWALL, PLASTER OR ACT ON CEILINGS
- 11 MAINTAIN AND PROTECT FIRE PLACE MANTEL
- 12 MAINTAIN AND PROTECT EXISTING ORIGINAL WINDOW
- 13 SHORE UP OPENINGS IN EXISTING MASONRY WALL

DEMO NOTES:

1. CONTACT THE ARCHITECT AFTER DEMO OF SHEETROCK/PLASTER TO DETERMINE WHICH INTERIOR WALLS WILL BE MAINTAINED FOR STRUCTURAL INTEGRITY.
2. NO WORK TO BE DONE ON EXTERIOR AT THIS TIME.
3. NOTIFY ARCHITECT IMMEDIATELY IF ANY HISTORIC ARCHITECTURAL ITEM IS UNCOVERED DURING DEMOLITION.
4. ENTIRE ELECTRICAL SYSTEM, INCLUDING LIGHTING, OUTLETS, WIRING, SMOKE DETECTORS, AND PANELS TO BE REMOVED.
5. ENTIRE SPRINKLER SYSTEM TO BE REMOVED.
6. ENTIRE EXISTING HEATING AND PLUMBING SYSTEM TO BE REMOVED.

REVISIONS

#	DATE	DESCRIPTION

DATE:	9/21/06
PROJECT #	060905
DRAWN BY:	KW
CHECKED BY:	KW
DRAWING SCALE	N.A.

SHEET TITLE

DEMO PLAN
THIRD FLOOR

D103

© COPYRIGHT 1985-2003
REPRODUCTION OR RESALE OF
THIS DOCUMENT WITHOUT
WRITTEN PERMISSION OF
GAWRON ARCHITECTS IS PROHIBITED

A1 DEMO PLAN-THIRD FLOOR

A17 DEMO KEY

1/8"=1'-0"

NTS

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20