

SEVENTY-FIVE STATE STREET


75 State Street

Portland, ME

SOUTH HARBORSIDE 3RD FLOOR RENOVATION BUILDING PERMIT DRAWINGS

DRAWING INDEX

GENERAL	STRUCTURE	ARCHITECTURAL	MECH/PLUMBING	ELECTRICAL
G101				
G102				
G104				
	S100			
	S101			
		D101		
		A001		
		A002		
		A101		
		A301		
		A302		
		A801		
		A901		
		A921		
		A922		
		A931		
		A941		
				LS101

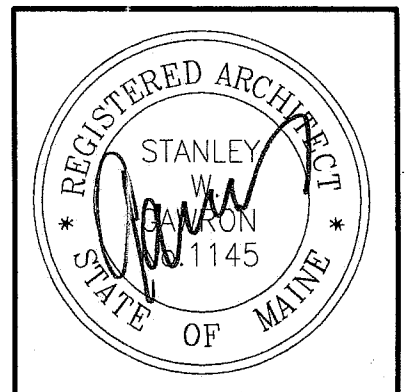

Gawron Turgeon ARCHITECTS
29 Black Point Road
Scarborough, Maine 04074
www.gawronturgeon.com
207-883-6307 tel 207-883-0361 fax

SEVENTY-FIVE STATE STREET
SOUTH HARBORSIDE THIRD FLOOR RENOVATIONS
PORTLAND MAINE

REVISIONS		
#	DATE	DESCRIPTION
07-15-08		PRICING SET

DATE	08.05.08
PROJECT #	020108
DRAWN BY:	KW
CHECKED BY:	
DRAWING SCALE	N.A.

SHEET TITLE
TITLE SHEET & DRAWING INDEX

G101

© COPYRIGHT 1985-2008
REPRODUCTION OR REUSE OF THIS
DOCUMENT WITHOUT WRITTEN
PERMISSION OF GAWRON TURGEON
ARCHITECTS IS PROHIBITED

ABBREVIATIONS

ALUM OR AL	ALUMINUM	GALV	GALVANIZED	S	SOUTH
AWP	ACOUSTICAL WALL PANEL	GB	GRAB BARS	SC	SHOWER CURTAIN
ACT	ACOUSTICAL CEILING TILE	GC	GENERAL CONTRACTOR	SD	SOAP DISPENSER
BIT	BITUMINOUS	GWB	GYP SUM WALL BOARD	SCHED	SCHEDULE
BM	BENCH MARK	HC	HANDICAP	SECT	SECTION
BOT	BOTTOM	HD WD	HARDWOOD	SHT	SHEET
BRG	BEARING	HDR	HEADER	SIM	SIMILAR
BRK	BRICK	HDWE	HARDWARE	SND	SANITARY NAPKIN DISPOSAL
C	CARPET	HM	HOLLOW METAL	SQ	SQUARE
CAB	CABINET	HORZ	HORIZONTAL	SSS	SYNTHETIC SPORTS SURFACE
CB	CHALK BOARD	HT	HEIGHT	STD	STANDARD
CC	CENTER TO CENTER	ID	INSIDE DIAMETER	STL	STEEL
CH	CONCRETE HARDENER	IF	INSIDE FACE	STL	STRUCTURAL
CJ	CONTROL JOINT	IN	INCHES	SV	SHEET VINYL
CL	CENTER LINE	INSUL	INSULATION	T	TEMPERED (GLASS)
CLG	CEILING	INT	INTERIOR	TB	TACK BOARD
CMU	CONCRETE MASONRY UNITS	LOC	LOCATION	THK	THICKNESS
CONC	CONCRETE	M	MARBLE	TO	TOP OF
CONT	CONTINUOUS	MAS	MASONRY	TOB	TOP OF BEAM
CONST	CONSTRUCTION	MAX	MAXIMUM	TOM	TOP OF MASONRY
CONTR	CONTRACTOR	MB	MARKER BOARD	TOW	TOP OF WALL
CT	CERAMIC TILE	MECH	MECHANICAL	TP	TOILET PAPER DISPENSER
DBL	DOUBLE	MFR	MANUFACTURER	TYP	TYPICAL
DF	DRINKING FOUNTAIN	MIN	MINIMUM	UNO	UNLESS NOTED OTHERWISE
DIA	DIAMETER	MISC	MISCELLANEOUS	VB	VAPOR BARRIER
DIM	DIMENSION	MO	MASONRY OPENING	VT	VINYL COMPOSITION TILE
DNA	DOES NOT APPLY	MOP	MOP RECEPTOR	VCT	VERTICAL
DTL	DETAIL	MRGB	MOISTURE RESISTANT GYPSUM	VWC	VINYL WALL COVERING
DWG	DRAWING	MTL	METAL	W	WEST
E	EACH	N	NORTH	W/	WITH
EA	EACH FACE	NA	NOT APPLICABLE	WC	WATER CLOSET
EF	EXPANSION JOINT	NT	NOT IN CONTACT	WD	WOOD
EJ	ELEVATION	NUM	NUMBER		
EL	ELECTRICAL	NOM	NOMINAL		
ELEC	ELEVATOR	NTS	NOT TO SCALE		
ELEV	ELECTROMAGNETIC HOLD OPEN	OC	ON CENTER		
EQ	EQUAL	OD	OUTSIDE DIAMETER		
EW	EACH WAY	OPNG	OPENING		
EW	ELECTRIC WATER COOLER	OPP	OPPOSITE		
EXIT OR (E)	EXISTING	OSF	OUTSIDE FACE		
EXP	EXPANSION	P	PAINT		
EXT	EXTERIOR	PTD	PAINTED		
FD	FLOOR DRAIN	PL	PLATE		
FDN	FOUNDATION	PLY WD	PLYWOOD		
FE	FIRE EXTINGUISHER	PNL	PANEL		
FFE	FINISH FLOOR ELEVATION	P.A.	PRESSURE TREATED		
FIN	FINISH FLOOR	PT & D	PAPER TOWEL AND WASTE		
FIN FL OR FF	FINISH GRADE	PTN	PARTITION		
FIN GR	FINISH GRADE	RD	ROOF DRAIN		
FL	FIRE RATING	REF	REFRIGERATOR		
FR	FRAMING	REF	REFRIGERATOR		
FRMG	FRAMING	REIN	REINFORCED		
FT	FEET (FOOT)	REQD	REQUIRED		
FV	FIELD VERIFY	RM	ROOM		
FWC	FABRIC WALL COVERING	RO	ROUGH OPENING		
G	GRANITE				
GA	GAUGE				

LEGEND

	BUILDING SECTION MARKER
	CEILING TAG
	COLUMN CENTER LINE
	DETAIL MARKER
	DOOR TAG
	EXTERIOR ELEVATION
	INTERIOR ELEVATION
	PLANT TAG
	REVISION CLOUD WITH TAG
	ROOM TAG
	SECTION MARKER
	WALL TYPE
	WINDOW TAG

GENERAL NOTES

- THE GENERAL CONTRACTOR SHALL VERIFY ALL EXISTING CONDITIONS AND DIMENSIONS, AND REPORT ANY DISCREPANCIES TO THE ARCHITECT. CONTRACTOR SHALL PROCEED WITH THE WORK ONLY AFTER DISCREPANCY HAS BEEN RESOLVED WITH THE ARCHITECT.
- THE LOCATIONS OF DOORS NOT DIMENSIONED SHALL BE 6 INCHES FROM ADJACENT WALL.
- THE BUILDING SHALL BE CONSTRUCTED TO CONFORM WITH ALL APPLICABLE CODES INCLUDING, BUT NOT LIMITED TO, THE LATEST EDITIONS OF IBC 2003, BOCA, NFPA 101, & ANSI.
- ALL WOOD IN CONTACT WITH CONCRETE SHALL BE PRESSURE PRESERVATIVE TREATED & ALL CONNECTIONS TO BE STAINLESS STEEL.
- CONTRACTOR SHALL WORK FROM GIVEN DIMENSIONS AND LARGE SCALE DETAILS ONLY. DO NOT SCALE THE DRAWINGS.
- THE GENERAL CONTRACTOR SHALL BE RESPONSIBLE FOR ALL PERMITS, FEES, CERTIFICATES OF INSPECTION AND APPROVAL, ETC. UNLESS OTHERWISE NOTED BY OWNER.
- EXISTING BUILDING COMPONENTS WHICH ARE AFFECTED BY NEW WORK AND DEMOLITION, OR WHICH MAY BE DAMAGED BY THE CONTRACTOR OR ANY SUBCONTRACTORS SHALL BE REPLACED OR RESTORED TO ORIGINAL CONDITION AND COLOR BY METHODS DESCRIBED IN THIS CONTRACT OR AS APPROVED BY THE ARCHITECT. THE GENERAL CONTRACTOR SHALL SEAL, PATCH AND FILL ANY FLOOR AND/OR WALL PENETRATIONS DUE TO DEMOLITION/CONSTRUCTION.
- INSTALL BLOCKING BEHIND ALL SURFACE APPLIED FIXTURES, TRIM, CABINETS, COUNTER TOPS, AND GRAB BARS WHEN MOUNTED ON STUD WALLS.
- GRAB BARS SHALL BE ABLE TO SUPPORT A DEAD WEIGHT OF 250 LBS AT ANY POINT.
- CONTRACTOR SHALL VERIFY SIZE AND LOCATION OF EXISTING MECHANICAL AND PLUMBING ELEMENTS. CONTRACTOR SHALL RENOVATE EXISTING ALARM SYSTEM TO MAINTAIN CONFORMANCE TO NFPA 13 & 101. CONTRACTOR SHALL VERIFY SIZE & LOCATION OF ALL ELECTRICAL SERVICES AND EQUIPMENT.
- INSTALL MOISTURE RESISTANT GYPSUM BOARD IN LAVATORIES, JANITOR CLOSETS, AND ALL OTHER HIGH HUMIDITY AREAS.
- FINISHES: FINISHES OTHER THEN THE STANDARD FINISHES ARE ALL INDICATED ON THE DRAWINGS. CEILING FINISHES ARE SHOWN ON THE REFLECTED CEILING PLANS AND ALL OTHER FINISHES ARE SHOWN ON THE INTERIOR FINISH LEGEND AND SCHEDULE AND/OR INTERIOR ELEVATIONS. FINISHES INDICATED FOR A PARTICULAR ROOM OR SPACE ARE APPLICABLE FOR THE ENTIRE ROOM OR SPACE, UNLESS OTHERWISE NOTED.
- ALL EXPOSED SURFACES ARE TO BE PAINTED, WHETHER OR NOT INDICATED ON THE DRAWINGS, EXCEPT AS FOLLOWS: WHERE SPECIAL COATINGS ARE INDICATED; PREFINISHED ITEMS, CONCEALED SURFACES, OPERATING PARTS, AND LABELS. IF PREFINISHED, PAINTING THE FOLLOWING: EXPOSED MECHANICAL DUCTWORK, WALL DIFFUSERS, GRILLES AND LOUVERS, ROOF TOP MECHANICAL EQUIPMENT, AND SPEAKER GRILLES. FINISHED METAL SURFACES, EXCEPT AS LISTED ABOVE. SEE SPECIFICATIONS ON DRAWINGS IDENTIFYING THE TYPES OF PAINTS AND SPECIALTY COATINGS TO BE USED IN ACCORDANCE WITH MATERIAL BEING PAINTED OR COATED.
- BUILDING INSULATION: PROVIDE AS INDICATED ON WALL DETAILS AND IN ACCORDANCE WITH PARTITION TYPES, WHETHER OR NOT SHOWN IN DETAILS AND DRAWINGS. FOR DRAWING CLARITY, INSULATION MAY NOT BE SHOWN, EVEN IF IT IS PROVIDED.
- CONTRACTOR SHALL SUBMIT SAMPLES OF ALL INTERIOR FINISHES FOR ARCHITECT'S REVIEW.
- THE DESIGN AND INSTALLATION OF THE HVAC AND PLUMBING SYSTEMS, ELECTRICAL AND FIRE PROTECTION SYSTEMS, AND STRUCTURAL SYSTEMS SHALL BE PROVIDED THROUGH A DESIGN/BUILD CONTRACT UNDER THE GENERAL CONTRACTOR.
- ALL CAULKING AROUND WINDOWS SHALL BE NON-HARDENING TYPE SEALANT.
- ANY DOORS NOT LOCATED DIMENSIONALLY ARE TO BE 6" MIN. OFF OF ADJACENT WALL AT HINGE SIDE OF THE DOOR.
- ALL MATERIALS, FABRICATION, AND/OR INSTALLATION SHALL COMPLY WITH ALL TECHNICAL AND INDUSTRY STANDARDS AND SPECIFICATIONS FOR EACH DIVISION OF WORK.

PROJECT DIRECTORY

OWNER: 75 STATE STREET MANAGER 75 STATE STREET PORTLAND, MAINE 04101 207-772-2675 FAX: 207772-2896	ARCHITECT: GAWRON TURGEON ARCHITECTS 29 BLACK POINT ROAD SCARBOROUGH, MAINE 04074 207-883-6307 FAX: 207-883-0361	CONSTRUCTION MANAGER: WRIGHT-RYAN CONSTRUCTION INC. 10 DANFORTH STREET PORTLAND, MAINE 04101 207-773-3625 207-773-5173	STRUCTURAL ENGINEER: MOHLIN & COMPANY 148 MAIN STREET SUITE 300 SACO, MAINE 04072 207-283-9151 FAX: 207-283-9136
MECHANICAL ENGINEER: DESIGN/BUILD	ELECTRICAL ENGINEER: DESIGN/BUILD		

BUILDING PERMIT