


R-VALUE REQUIREMENTS	PROPOSED
Ceiling R-value	49
Wood Frame Wall R-value	20
Floor R-value	30
Fenestration U-Factor	0.35
Skylight U-Factor	0.60
	.50

2009 IECC 101.4.2
 THE BUILDING IS AN EXISTING STRUCTURE IN A HISTORIC DISTRICT. IT IS EXEMPT FROM MEETING THE IECC.

INSULATION NOTES
 PROVIDE OPTIONS FOR CLOSED CELL SPRAY FOAM IN WALLS
 ALL PENETRATIONS SHALL BE AIR SEALED. INTERSECTION OF
 FIRST FLOOR WALLS WITH GARAGE CEILING SHALL BE SEALED
 WITH SPRAY FOAM

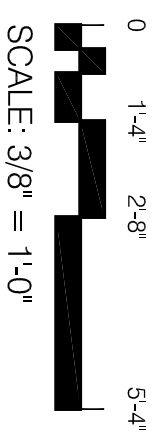

1 SECTION
 3/8" = 1'-0"

SECTION
 ISAACS

A-3.1
DRAWN BY: BB
DATE: 10.27.2015