

**Submittal Data: System 30RLX
ASU30RLX & AOU30RLX**



Job Name: _____ Location: _____
 Purchaser: _____
 Engineer: _____
 Submitted To: _____ For: Reference Approval Construction
 Submitted By: _____
 Unit Designation: _____ Schedule No. _____ Model No.: _____

Capacities:

Cooling	30,600 BTU/h
Outdoor Design Temp. <i>F° DB/WB</i>	95/75
Heating	32,000 BTU/h
Outdoor Design Temperature <i>F° DB/WB</i>	47/43
HSPF	9.5
SEER	17.5
EER <i>Cooling/Heating</i>	10.0/10.7
Voltage/Frequency/Phase	208-230/60/1

Indoor Unit:

Noise Level Cooling <i>db (A) - H/M/L/Q</i>	49/ 42/ 37/ 33
Noise Level Heating <i>db (A) - H/M/L/Q</i>	49/ 42/ 37/ 33
Weight	31 lbs.


Outdoor Unit:

Noise Level <i>Cooling/Heating</i>	54/55
Recommended Fuse Size	30A
Min. Ampacity	13.1A
MCA	22A
Running Current <i>Cooling</i>	13.2A
Running Current <i>Heating</i>	10.5A
Weight	137 lbs.

Refrigerant Piping:

Max Ht. Difference	98 ft.
Max Total or Combined Length	164 ft.
Discharge Vapor Line (O.D.)	3/8 in.
Suction (O.D.)	5/8 in.

OUTLINE AND DIMENSIONS

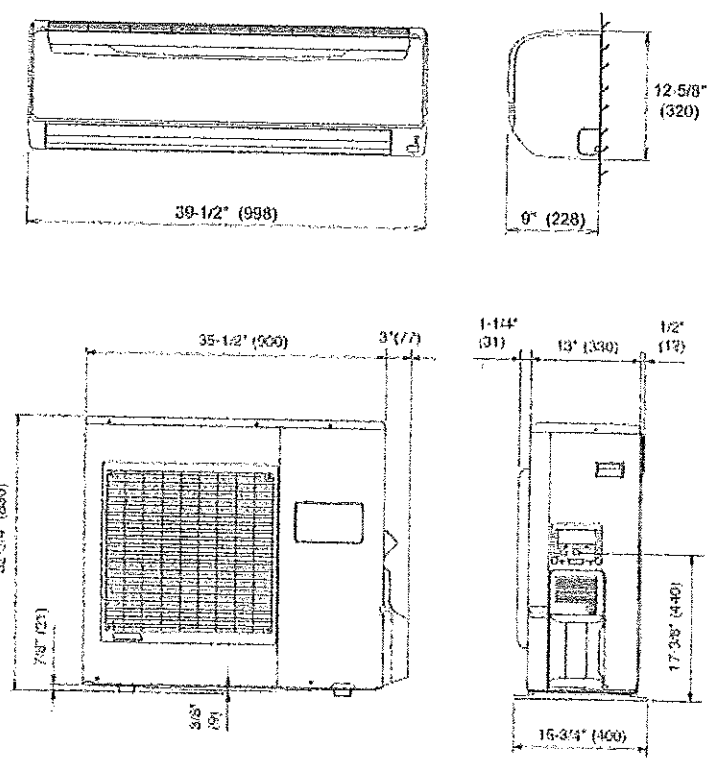

Standard Features:

- ◆ Six year compressor warranty
- ◆ Two year parts warranty
- ◆ Digital wireless remote control
- ◆ 4-way automatic louvers
- ◆ Min Heat (50F heating set point)
- ◆ Built in Low Ambient
- ◆ Auto Restart/ Reset
- ◆ 24 hour timer
- ◆ Optional Wired Remote Control
- ◆ Dry mode
- ◆ Refrigerant R410A
- ◆ Quiet Mode

Notes:

