


RCP NOTES

- 1.) REMOVE ANY UNUSED AND ABANDONED ELEMENTS ON CEILING IN WORK AREA
- 2.) AT NEW FIRE RATED CEILING, PROVIDE STRAPPING ON EXISTING CEILING, LEVEL AND SHIM FOR NEW GWB.
- 3.) ADJUST SPRINKLER HEAD LOCATIONS AS REQUIRED FOR NEW WORK
- 4.) ALL RECESSED LIGHTING FIXTURES TO HAVE IC-FIRE RATED HOUSING TO MEET CEILING FIRE RATING REQUIREMENTS

LIGHTING LEGEND

	RECESSED LIGHT
	SURFACE MOUNTED LIGHT
	2'X2' RECESSED LIGHT FIXTURE WITH LENS
	PENDANT LIGHT FIXTURE
	PENDANT LIGHT FIXTURE
	SPRINKLER HEAD
	FIRE ALARM
	SMOKE / C.M. DETECTOR
	CAMERA
	CEILING VENT / GRILL

1.) ALL RECESSED LIGHTING IN FIRE RATED CEILINGS TO HAVE AN IC RATED, FIRE RATED HOUSING TO MEET UL RATING OF CEILING ASSEMBLY.
 2.) ALL LIGHTING TO BE LED
 3.) ALL LIGHTING TO BE ON DIMMER SWITCHES

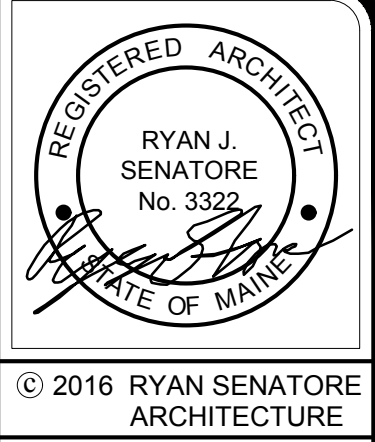

© 2016 RYAN SENATORE ARCHITECTURE

LAYFAYETTE BUILDING RENOVATION
 PARK STREET
 PORTLAND, MAINE



RYAN SENATORE
ARCHITECTURE
 565 CONGRESS STREET
 PORTLAND, MAINE 04101
 207-747-5159
 senatorearchitecture.com

CONSULTANTS:

REVISIONS:

DATE: SEPTEMBER 29, 2016
 PROJECT No. 1621
 DRAWN BY: RJS, RRT
 CHECKED BY: RJS
 SCALE: AS NOTED

SHEET TITLE:
FIRST FLOOR REFLECTED CEILING PLAN

A1-4

1 FIRST FLOOR REFLECTED CEILING PLAN
 1/4" = 1'-0"