
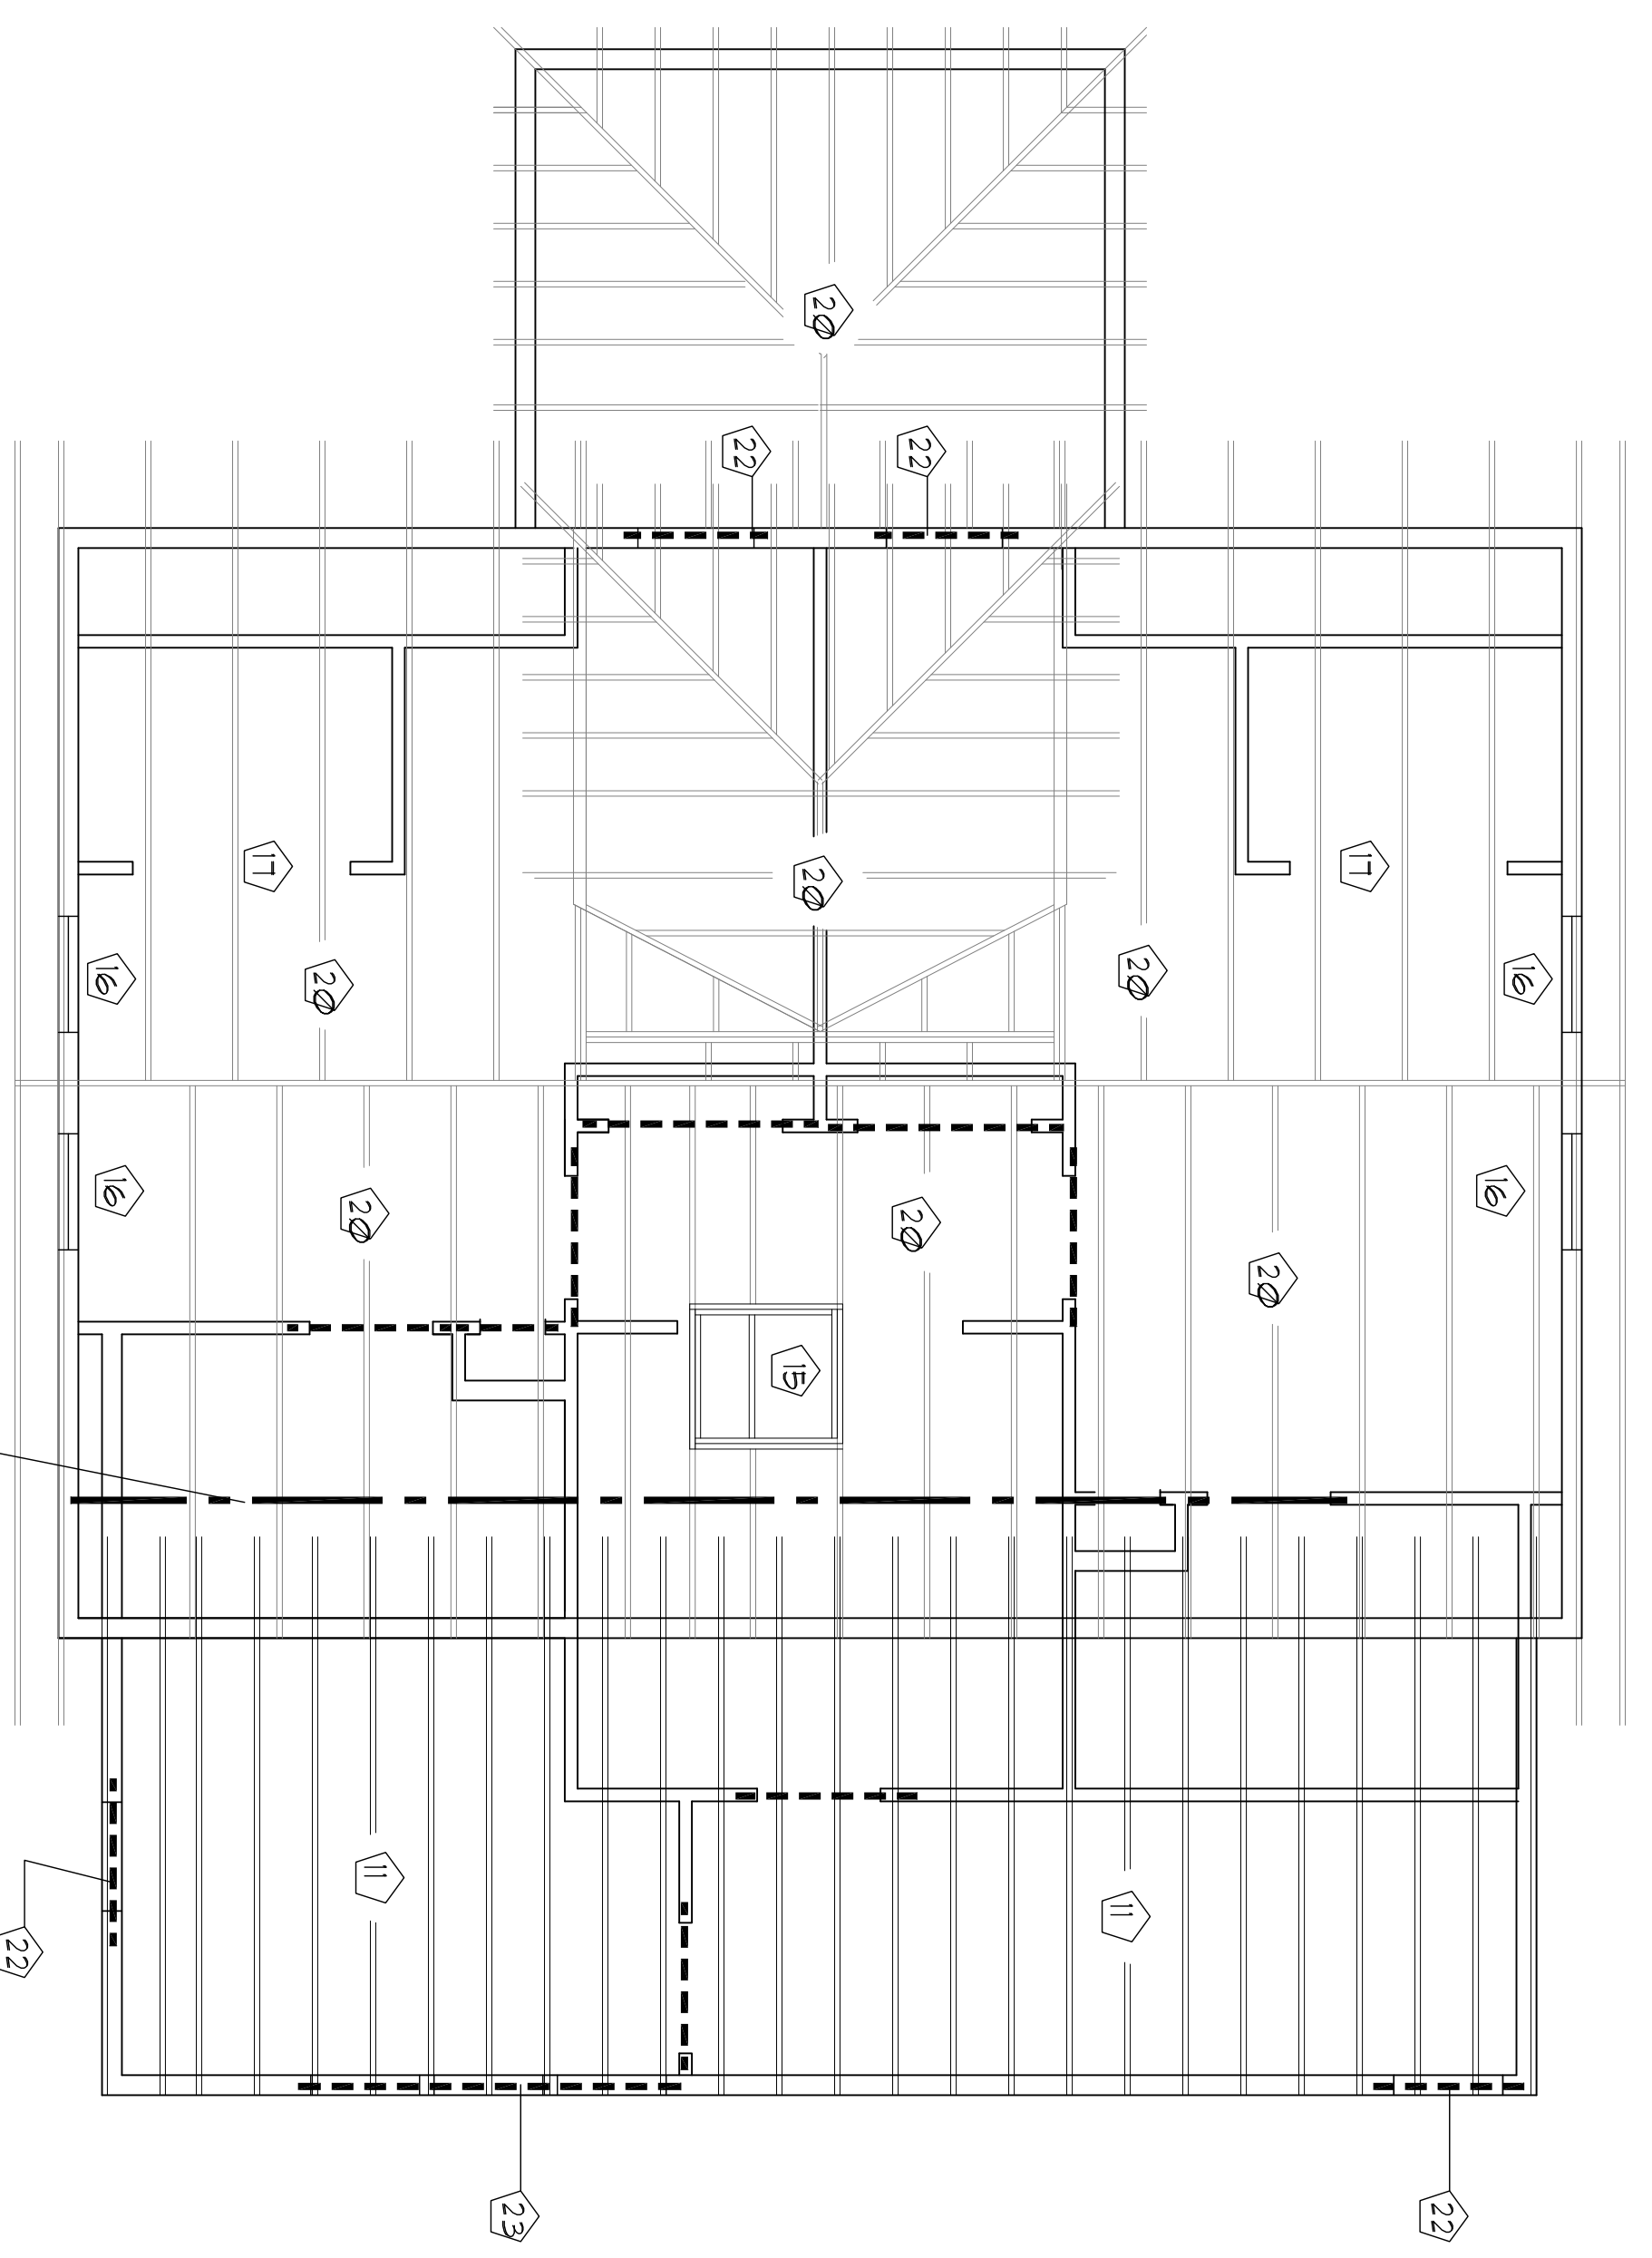



- LEGEND**
- WOOD HEADER ————
 - WOOD BEAM ————
 - CONCRETE FOUNDATION WALL & FOOTING ————
 - HEADER NOTE
 - HEADERS - (2) 2x8 UNLESS NOTED OTHERWISE

KEYED NOTES


- 1 EXISTING BRICK COLUMN - TYP. OF 2.
- 2 EXISTING STEEL COLUMN - TYP. OF 3.
- 3 8" DIA. CONCRETE PIER
- 4 EXISTING 1 3/4"x8" (ACTUAL DIMENSIONS) @ 18" 4/2" O.C.
- 5 EXISTING CONCRETE PIER
- 6 EXISTING WOOD BEAM.
- 7 EXISTING PRECAST "SHUNEE" TYPE STEPS
- 8 DEPRESSSED SLAB & THRESHOLD PER LIFT MANUFACTURERS WRITTEN INSTRUCTIONS.
- 9 CONC. PIER - SEE DETAIL A.
- 10 EXISTING 10x8 WOOD BEAM.
- 11 2x8 @ 16" O.C.
- 12 (2) 2x8 @ 12" O.C.
- 13 5 1/4" X 5 1/4" P.T. PGL POST W/ SIMPSON ABE POST BASE W/ 1/2" GALV. BOLT & SIMPSON ECC462-5-5 POST CAP.
- 14 STAIRWELL INFILL.
- 15 CHIMNEY INFILL.
- 16 EXISTING WINDOW/DOOR OPENING.
- 17 EXISTING CLOSET DOOR OPENING.
- 18 EXISTING BRICK/RUBBLE FOUNDATION.
- 19 CONCRETE FROST WALL FOUNDATION.
- 20 EXISTING ROOF FRAMING.
- 21 3" DIA. STEEL COLUMN.
- 22 (3) 2x8 HEADER
- 23 (3) 2x10 HEADER
- 24 (3) 1 3/4 X 9 1/4 LVL.
- 25 (3) 2x10.
- 26 (3) 1 3/4 X 11 1/4 LVL.
- 27 (3) 1 3/4 X 1 1/4 LVL CONT. STAGGER SPLICES IN EA. PLY BY 6'-0" MIN. FASTEN TOGETHER WITH (2) FASTENLAGER TLK04 @ 12" FROM BOTH SIDES LOCATED 2" FROM TOP & BOT.
- 28 (2) 8" DIA. CONCRETE TUBES AT WOOD STAIRS.
- 29 2x8 @ 12" OC PT STRINGERS.
- 30 2x8 @ 12" OC PORCH FLOOR FRAMING SECURED TO 2x8 LEDGERS.
- 31 CONCRETE CONTROL JOINT - TYP. OF 3 - EQUALLY SPACED.

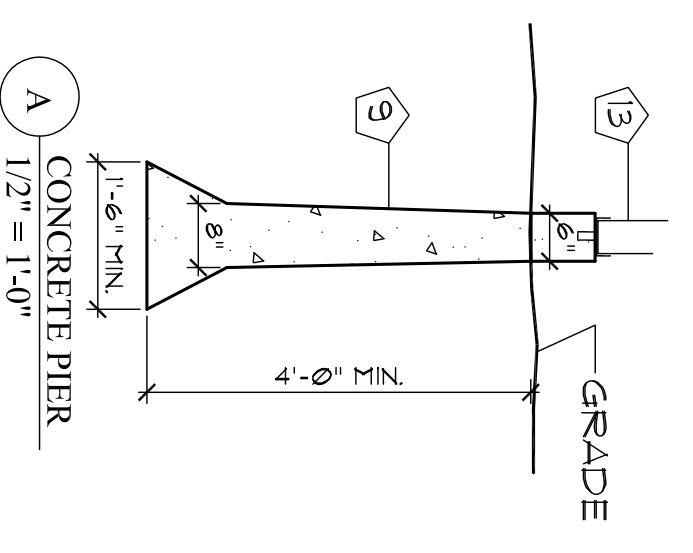


4 ROOF FRAMING PLAN
1/4" = 1'-0"
N

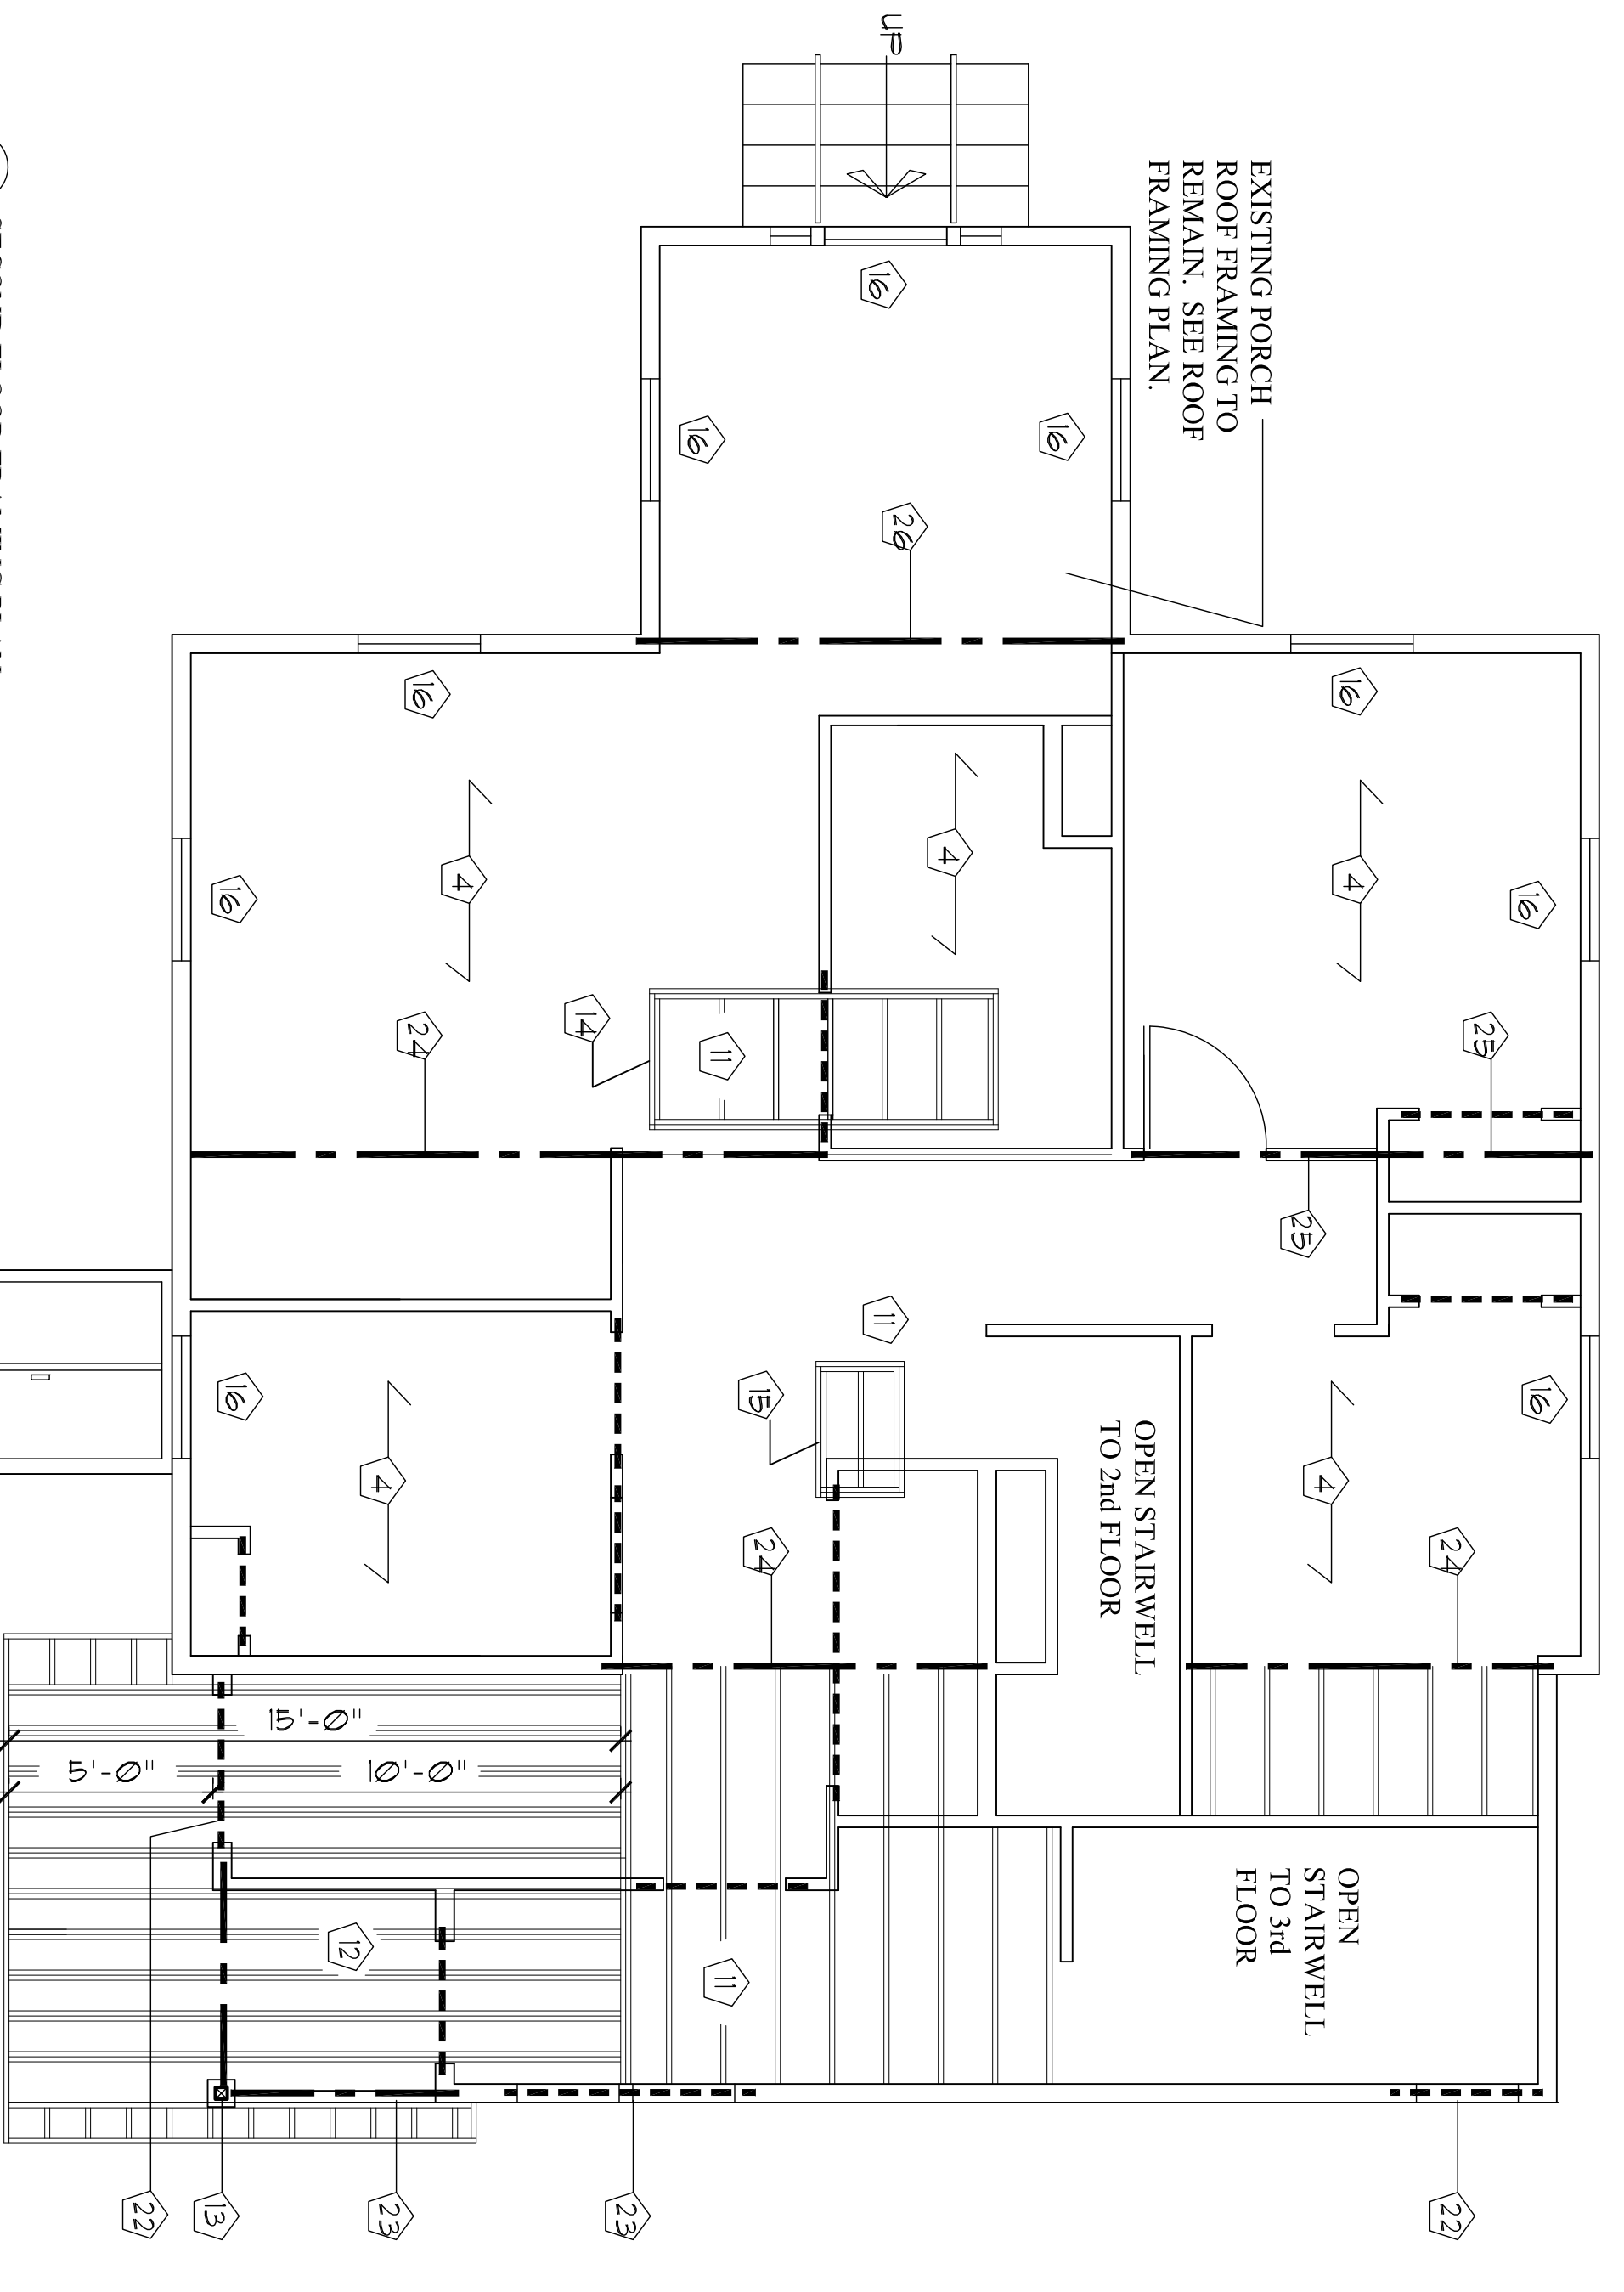

2 SECOND FLOOR FRAMING PLAN
1/4" = 1'-0"
N

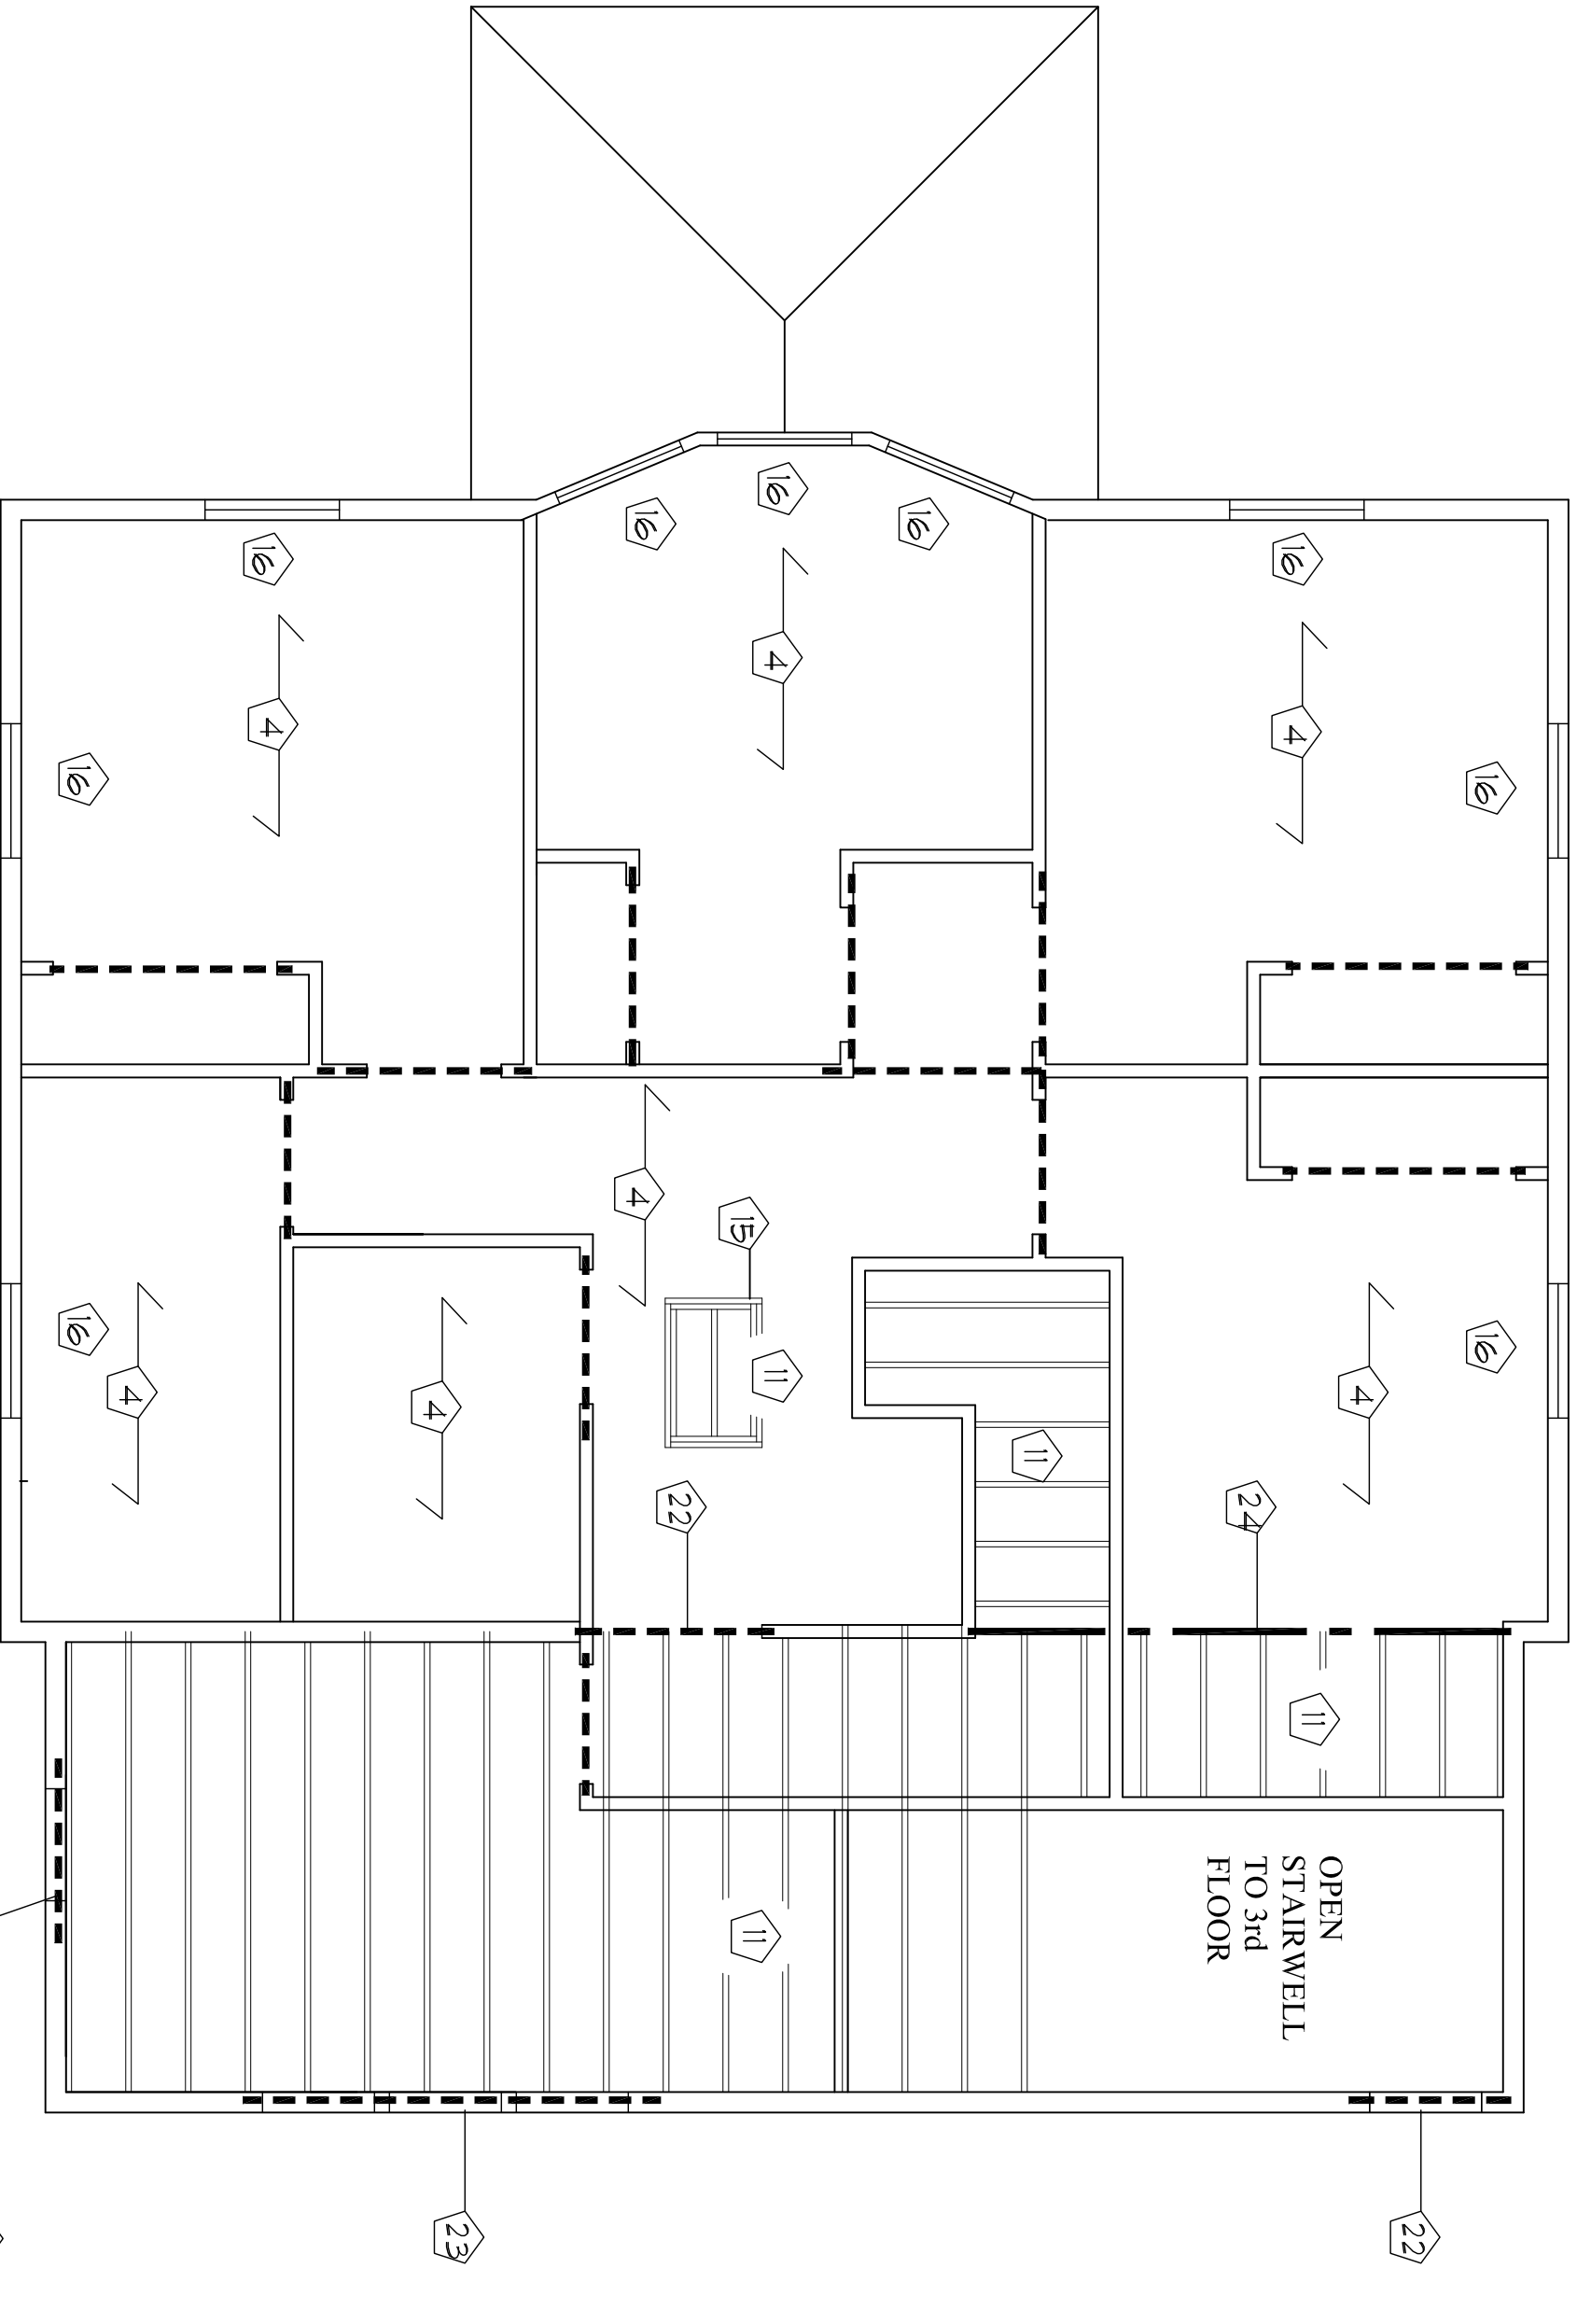

3 THIRD FLOOR FRAMING PLAN
1/4" = 1'-0"
N

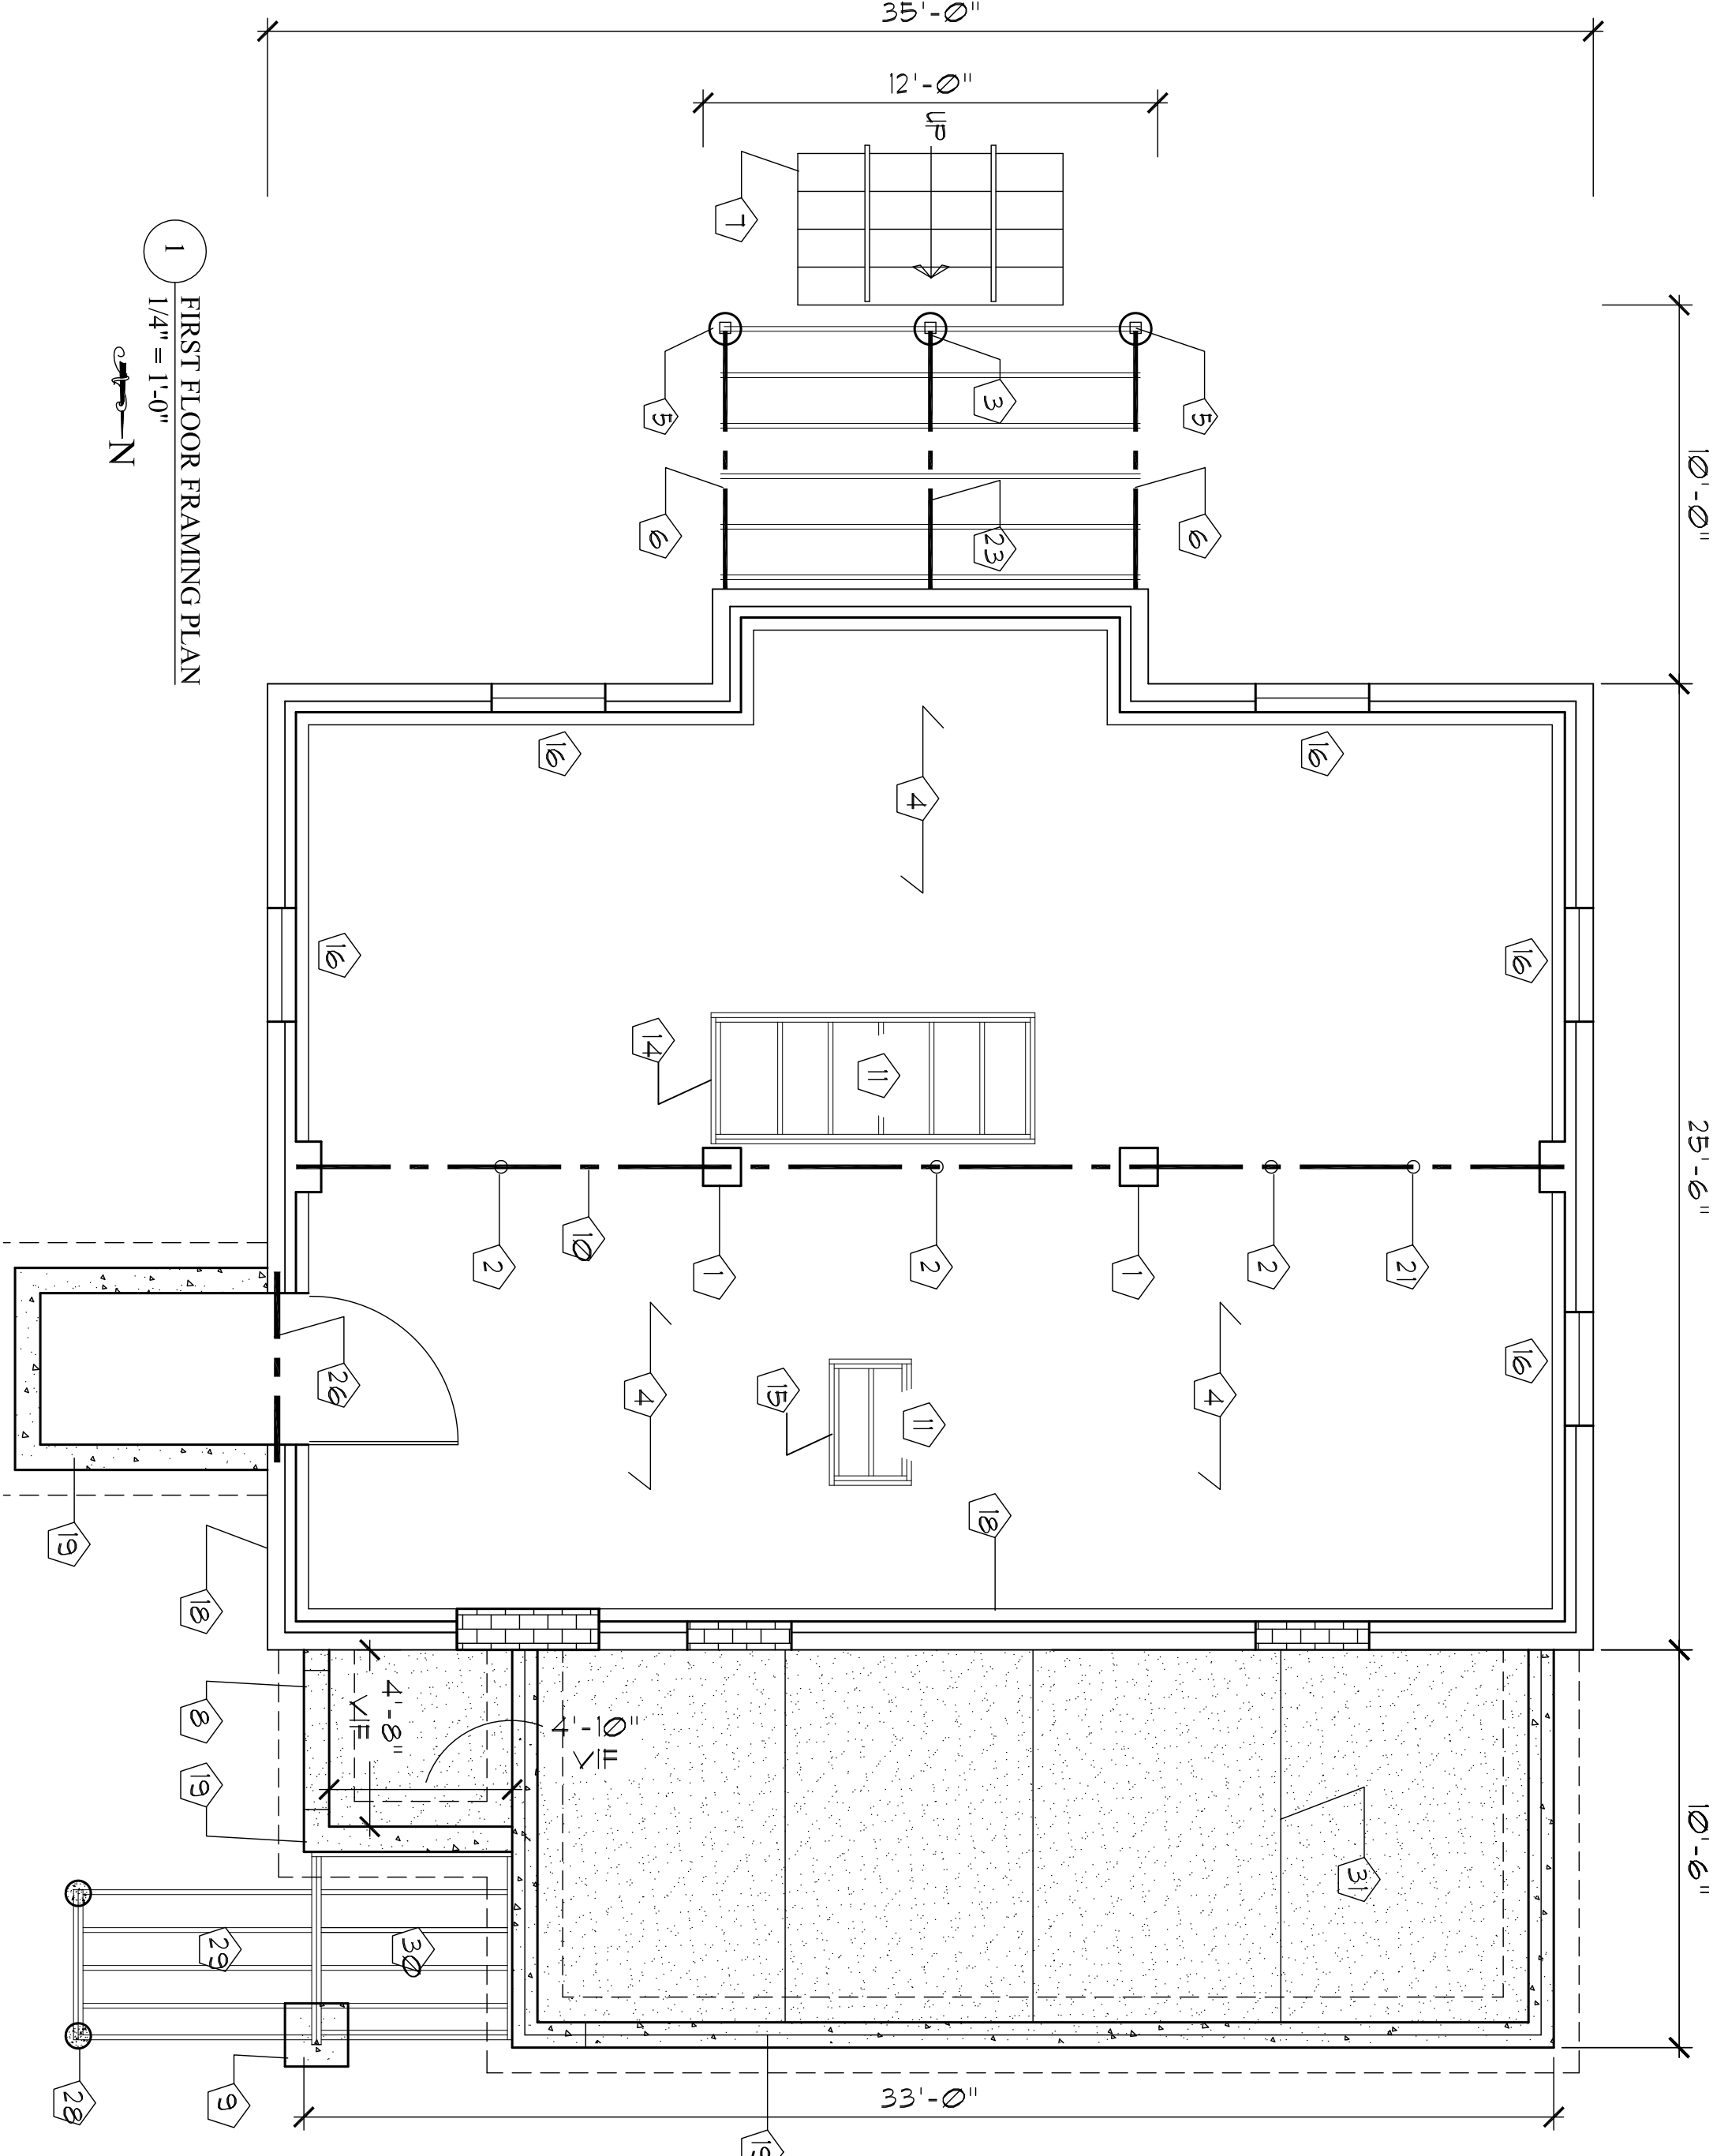

1 FIRST FLOOR FRAMING PLAN
1/4" = 1'-0"
N

ST-1	Drawing	FRAMING PLANS		Date	4/8/13	Scale	1/4" = 1'-0"	Architect	SHIELDS ARCHITECTURE		
					Project:	ADDITION & RENOVATIONS		216 Range Road, Cumberland, Maine (207) 776-8926			
				303 WOODFORD STREET PORTLAND, MAINE							