City of Portland, Maine - Building or Use Permit Application 389 Congress Street, 04101, Tel: (207) 874-8703, FAX: 874-8716

Location of Construction:	Owner:	Phon	e·	Permit No:
498 Woodford St	Soley, Tim		879-1410	remit No.
Owner Address:	Lessee/Buyer's Name:		nessName:	-
East Brown Cow Commercial St	Ptld Carolyn Fernald	879-1410		
Contractor Name:	Address:	Phone:		Permit Issued:
Bonnie Taylor	9 E. Ramsdell Falmon			
Past Use:	Proposed Use:	COST OF WORK:	PERMIT FEE:	-
		· \$	\$	
D-+-41		FIRE DEPT. Approve		
Retail		☐ Denied	Use Group: Type:	
		L Benied	Ose Group. Type.	Zone: CBL:
		Signature:	Signature:	184-D-015
Proposed Project Description:			TIES DISTRICT (P.A.D.)	Zoning Approval:
				Special Zone or Reviews:
4' x 5' painted double-sided w		1 1	11111	
business will be on 4 x 4 posts set 7' back from		Approved with Conditions: Denied		_ a onorciana
sidewalk		Denied		- - Welland
		Signature:	Danas	☐ Flood Zone ☐ Subdivision
Damaia Talam Dan	Data Applied Fam	Signature.	Date:	☐ Site Plan maj ☐minor ☐mm ☐
Permit Taken By:	Date Applied For:	11 June 1998		Done Fran maj Emmor Emme
				Zoning Appeal
1. This permit application does not preclude the Applicant(s) from meeting applicable State and Federal rules.				□ Variance
2. Building permits do not include plumbing, septic or electrical work.			☐ Miscellaneous ☐ Conditional Use	
•	F.1			
3. Building permits are void if work is not started within six (6) months of the date of issuance. False informa-				□ Interpretation
tion may invalidate a building permit and sto	p all work			☐ Approved☐ Denied
				Demed
				Historic Preservation
	□ Not in District or Landmark			
				☐ Does Not Require Review
	☐ Requires Review			
				Action:
	□Appoved			
I hereby certify that I am the owner of record of the				
authorized by the owner to make this application :				
if a permit for work described in the application is	,			
areas covered by such permit at any reasonable he	Date:			
areas covered by such permit at any reasonable in	our to emoree the provisions of the cou	de(3) applicable to such permit		
		11 June 1998		
SIGNATURE OF APPLICANT	ADDRESS:	DATE:	PHONE:	
DECONNCIBLE DEDCOM IN EUR DEE OF WAR	V TITI E		DUONE.	_
RESPONSIBLE PERSON IN CHARGE OF WOR	K, IIILL		PHONE:	CEO DISTRICT
White-Permit Desk Green-Assessor's Canary-D.P.W. Pink-Public File Ivony Card-Inspector				

SIGNAGE

PLEASE ANSWER ALL QUESTIONS

	zone: B) BUSINESS
OWNER: Carolyn Fernald alba Re	peat fertormance
APPLICANT:	1
ASSESSOR NO.:	
SINGLE TENANT LOT? YESNO	
MULTI TENANT LOT? YESNO	it:
FREESTANDING SIGN? YES NO (ex. pole sign)	DIMENSIONS $\frac{4' \times 5'}{} = 20^{3}$
MORE THAN ONE SIGN? YES NO /	DIMENSIONS
BLDG. WALL SIGN? YES NO (attached to bldg)	DIMENSIONS
MORE THAN ONE SIGN? YES NO	DIMENSIONS
MAX ACA 704 ZO4 Show	~
may hard 15 6 Shor	~
LOT FRONTAGE (FEET)	t_{q}
bldg frontage (feet) 35' Sh-	
AWNING YES NO IS AWNING BACK	LIT? YESNO
HEIGHT OF AWNING!	
IS THERE ANY COMMUNICATION, MESSAGE, TRADEMARK OR S	YMBOL ON IT?


A SITE SKETCH AND BUILDING SKETCH SHOWING EXACTLY WHERE EXISTING AND NEW SIGNAGE IS LOCATED MUST BE PROVIDED. SKETCHES AND/OR PICTURES OF THE PROPOSED SIGNS ARE ALSO REQUIRED.

A) TO WHAT IT TAY CONCERN. A AM APPROVING THIS SIGN FOR REPORT PERLENDENCE, 498 WOODFORD ST., BUTHAND, Outdoor Gear + clothing New and Quality Consignment HEMDER, JTSLLC tertorn and Kepeat 0141-P18 (000) Fainted on Wood Double Sided Bive to clouds) 50 29 11 m

PHONE NO. :

こここうろう

. ЕВОМ :

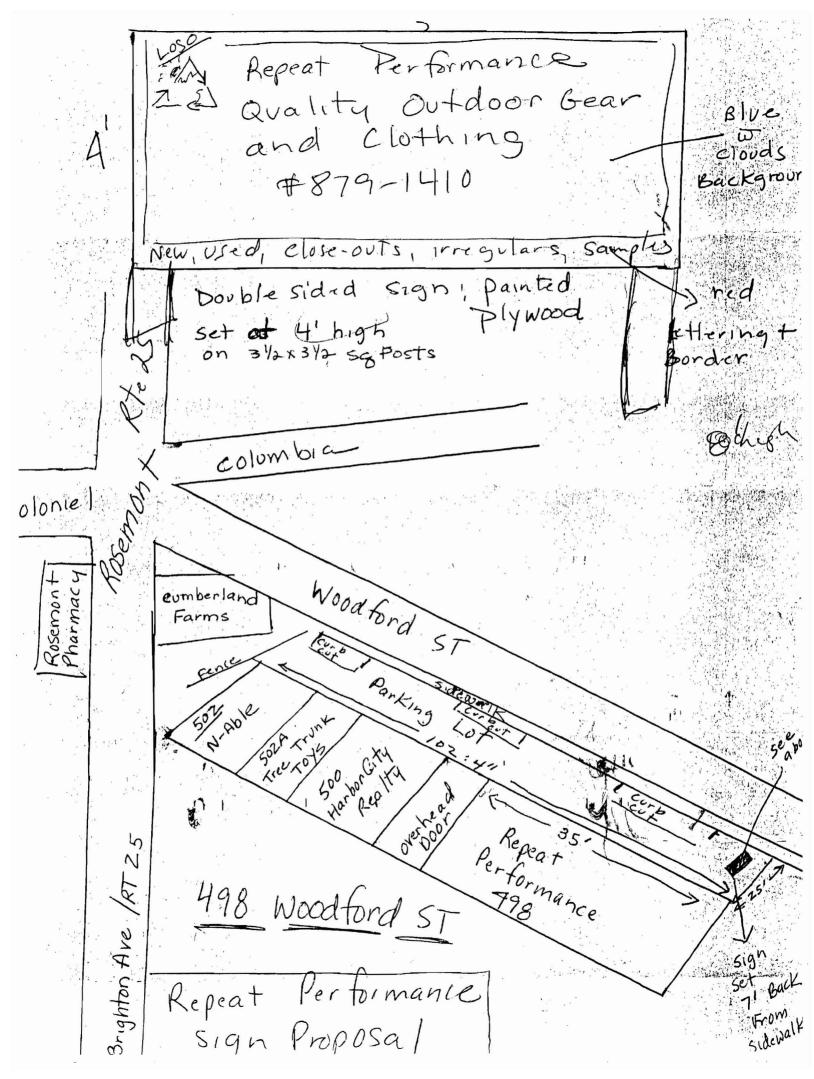

BUILDING PERMIT REPORT

DATE: 17 June 98 ADDRESS: 498 Wood Ford ST. (184-D-015)		
REASON FOR PERMIT: TO Exect Signage		
BUILDING OWNER: To Exect Signage		
CONTRACTOR: Bannie Taylor		
PERMIT APPLICANT:		
USE GROUP Sign BOCA 1996 CONSTRUCTION TYPE		
CONDITION(S) OF APPROVAL		

This Permit is being issued with the understanding that the following conditions are met:

Approved with the following conditions: $\frac{\times}{1}$, $\frac{\times}{2}$ 9

- This permit does not excuse the applicant from meeting applicable State and Federal rules and laws.
- Before concrete for foundation is placed, approvals from the Development Review Coordinator and Inspection Services must be obtained. (A 24 hour notice is required prior to inspection)
- Precaution must be taken to protect concrete from freezing.
- It is strongly recommended that a registered land surveyor check all foundation forms before concrete is placed. This is done to verify that the proper setbacks are maintained.
- 5. Private garages located beneath habitable rooms in occupancies in Use Group R-1, R-2, R-3 or I-1 shall be separated from adjacent interior spaces by fire partitions and floor/ceiling assembly which are constructed with not less than 1-hour fire resisting rating. Private garages attached side-by-side to rooms in the above occupancies shall be completely separated from the interior spaces and the attic area by means of ½ inch gypsum board or the equivalent applied to the garage means of ½ inch gypsum board or the equivalent applied to the garage side. (Chapter 4 Section 407.0 of the BOCA/1996)
- All chimneys and vents shall be installed and maintained as per Chapter 12 of the City's Mechanical Code. (The BOCA National 6 Mechanical Code/1993).
- 7. Sound transmission control in residential building shall be done in accordance with Chapter 12 section 1214.0 of the city's building code.
- 8 Guardrails & Handrails: A guardrail system is a system of building components located near the open sides of elevated walking surfaces for the purpose of minimizing the possibility of an accidental fall from the walking surface to the lower level. Minimum height all Use Groups 42", except Use Group R which is 36". In occupancies in Use Group A, B, H-4, I-1, I-2 M and R and public garages and open parking structures, open guards shall have balusters or be of solid material such that a sphere with a diameter of 4" cannot pass through any opening. Guards shall not have an ornamental pattern that would provide a ladder effect. (Handrails shall be a minimum of 34" but not more than 38". Use Group R-3 shall not be less than 30", but not more than 38".) Handrail grip size shall have a circular cross section with an outside diameter of at least 1 1/4" and not greater than 2".
- 9. Headroom in habitable space is a minimum of 7'6".
- Stair construction in Use Group R-3 & R-4 is a minimum of 10" tread and 7 3/4" maximum rise. All other Use group minimum 10. 11" tread. 7" maximum rise.
- The minimum headroom in all parts of a stairway shall not be less than 80 inches, (6'8") 11.
- Every sleeping room below the fourth story in buildings of use Groups R and I-1 shall have at least one operable window or 12. exterior door approved for emergency egress or rescue. The units must be operable from the inside without the use of special knowledge or separate tools. Where windows are provided as means of egress or rescue they shall have a sill height not more than 44 inches (1118mm) above the floor. All egress or rescue windows from sleeping rooms shall have a minimum net clear opening height dimension of 24 inches (610mm). The minimum net clear opening width dimension shall be 20 inches (508mm), and a minimum net clear opening of 5.7 sq. ft.
- Each apartment shall have access to two (2) separate, remote and approved means of egress. A single exit is acceptable when it 13. exits directly from the apartment to the building exterior with no communications to other apartment units.
- 14. All vertical openings shall be enclosed with construction having a fire rating of at lest one (1)hour, including fire doors with self closer's. (Over 3 stories in height requirements for fire rating is two (2) hours.)
- The boiler shall be protected by enclosing with (1) hour fire-rated construction including fire doors and ceiling, or by providing 15. automatic extinguishment.
- 16. All single and multiple station smoke detectors shall be of an approved type and shall be installed in accordance with the

provisions of the City's Building Code Chapter 9, Section 19, 920.3.2 (BOCA National Building Code/1996), and NFPA 101 Chapter 18 & 19. (Smoke detectors shall be installed and maintained at the following locations):

- In the immediate vicinity of bedrooms
- In all bedrooms
- In each story within a dwelling unit, including basements

In addition to the required AC primary power source, required smoke detectors in occupancies in Use Groups R-2, R-3 and I-1 shall receive power from a battery when the AC primary power source is interrupted. (Interconnection is required)

- 17. A portable fire extinguisher shall be located as per NFPA #10. They shall bear the label of an approved agency and be of an approved type.
- 18. The Fire Alarm System shall be maintained to NFPA #72 Standard.
- 19. The Sprinkler System shall maintained to NFPA #13 Standard.
- All exit signs, lights, and means of egress lighting shall be done in accordance with Chapter 10 Section & Subsections 1023. & 1024. Of the City's building code. (The BOCA National Building Code/1996)
- Section 25-135 of the Municipal Code for the City of Portland states, "No person or utility shall be granted a permit to excavate or open any street or sidewalk from the time of November 15 of each year to April 15 of the following year".
- The builder of a facility to which Section 4594-C of the Maine State Human Rights Act Title 5 MRSA refers, shall obtain a certification from a design professional that the plans commencing construction of the facility, the builder shall submit the certification to the Division of Inspection Services.
- 23. Ventilation shall meet the requirements of Chapter 12 Sections 1210. Of the City's Building Code.
- 24. All electrical, plumbing and HVAC permits must be obtained by a Master Licensed holders of their trade.
- 25. All requirements must be met before a final Certificate of Occupancy is issued.
- All building elements shall meet the fastening schedule as per Table 2305.2 of the City's Building Code. (The BOCA National Building Code/1996).
- 27. Ventilation of spaces within a building shall be done in accordance with the City's Mechanical Code (The BOCA National Mechanical Code/1993).

28.	Please read and implement the attached Land Use-Zoning report requirements.
₹. 29.	Care Must be Taken on the Foundation Frat Foundation (4X4/205/5
K.	MUST be a minimum of 4 doe u and placed in concrete. A Structural analysis should be made on the wind loads of the sign
æ0.	Structural anatysis should be made on the wind loads of The sign
	
31.	
32.	\

P. Samwel Hoffses, Code Enforcement

cc: Lt. McDougall, PFD Marge Schmuckal