City of Portland, Maine – Building or Use Permit Application 389 Congress Street, 04101, Tel: (207) 874-8703, FAX: 874-8716

Location of Construction:	Owner:		Phone:		Permit I	No:		
<u>1335</u> Congress St Owner Address:	Angellio's Lessee/Buyer's Name:	Phone:	Dunings		_			
Owner Address.	Esposito's	Phone:	BusinessN	ame:				
Contractor Name:	Address:	Phor			Permit I	ssued:		
Bailey Sign			4092					
Past Use:	Proposed Use:	COST OF WOR	K: P	ERMIT FEE:	1			
	-	\$	\$	31.00				
_		FIRE DEPT. 🗆	Approved II	NSPECTION:				
Restaurant	Same			Jse Group: Type:	ļ			
·		Signature:	s	ignature:	Zone:	CBL: 187	-A-001	
Proposed Project Description:				DISTRICT (P.A.D.)	Zoning A	Approval:		
Erect Signage		Action: Signature:	Approved Approved wit Denied		□ Shor □ Wetl □ Floor		· Reviews:	
Permit Taken By:	Date Applied For:	Signature.		Date:			lminor 🗆 mm 🗆	
Mary Gresik	Date Applied 101.	23 June 1997						
 Building permits do not include plumbing, sep Building permits are void if work is not started tion may invalidate a building permit and stop 	within six (6) months of the date o	f issuance. False informa			Cond Inter Appr Deni Hi Not i		ervation Landmark e Review	
	CERTIFICATION							
I hereby certify that I am the owner of record of the authorized by the owner to make this application a if a permit for work described in the application is areas covered by such permit at any reasonable ho	named property, or that the propose s his authorized agent and I agree t issued, I certify that the code offici	o conform to all applicab al's authorized representa code(s) applicable to such	le laws of this tive shall have a permit	jurisdiction. In addition,	n □Appr □ □ Den	o ved with C	Conditions	
		23 June			_			
SIGNATURE OF APPLICANT Bernadette D	anis ADDRESS:	DATE:	Р	HONE:				
RESPONSIBLE PERSON IN CHARGE OF WORK	· .			HONE:	CEO D	ISTRICT		
White-Pe	mit Desk Green-Assessor's	Canary-D.P.W. Pink-P	ublic File lvo	ory Card-Inspector	1	· 1		

....

SIGNAGE

PLEASE ANSWER ALL QUESTIONS

Address:	Zone:	R-5
Owner: Assessors #:		·
Applicant:		
Single Tenant Lot?: Yes No		
Multi Tenant Lot?: Yes No		
Freestanding (Ext pole sign)? Yes No Dim	ensions	
More than (1) one sign?: Yes No Dimensio	ns	
Bldg Wall Sign (att to bldg)? Yes No Dim	ensions	301
List all existing signage and their dimensions:		
· · · · · · · · · · · · · · · · · · ·		
Lot Frontage(feet): Tenant Frontage(f	eet):	
AWNINGS		
Awning?: Yes No Is Awning Backlit?:	Yes	No
Is there any comunication, message, trademark or symbol	on awning?	
Height of Awning?:		
PLEASE NOTE: Approvals for signs on the Public Sidewall come under different requirements and regulations.	and tempo	rary signs

ALSO: See reverse side for additional information, requirements and materials needed for signage application submittal.

Ì


BUILDING PERMIT REPORT


DATE: 30 June 97 ADDRESS: 1335 Congress ST	
REASON FOR PERMIT: TO CHECT SIGNAGE	·
BUILDING OWNER: Angellios Inc.	
•	
CONTRACTOR: Bailey Sign ' PERMIT APPLICANT: Ben marthe Danis APPROVAL: × (×27×28	ENTE D
PERMIT APPLICANT: Den Mdelle Vanis APPROVAL: ~ 1 27 78	D

CONDITION(S) OF APPROVAL

- χ 1. This permit does not excuse the applicant from meeting applicable State and Federal rules and laws.
 - 2. Before concrete for foundation is placed, approvals from the Development Review Coordinator and Inspection Services must be obtained. (A 24 hour notice is required prior to inspection)
 - 3. Precaution must be taken to protect concrete from freezing.
 - 4. It is strongly recommended that a registered land surveyor check all foundation forms before concrete is placed. This is done to verify that the proper setbacks are maintained.
 - 5. Private garages located <u>beneath habitable rooms</u> in occupancies in Use Group R-1, R-2, R-3 or I-1 shall be separated from adjacent interior spaces by fire partitions and floor/ceiling assembly which are constructed with not less than 1-hour fire resisting rating. Private garages attached side-by-side to rooms in the above occupancies shall be completely separated from the interior spaces and the attic area by means of ½ inch gypsum board or the equivalent applied to the garage means of ½ inch gypsum board or the eQUIVALENT of the BOCA/1996)
 - 6. All chimneys and vents shall be installed and maintained as per Chapter 12 of the City's Mechanical Code. (The BOCA National Mechanical Code/1993) U.L. 103.
 - 7. Sound transmission control in residential building shall be done in accordance with Chapter 12 section 1214.0 of the city's building code.
 - 8. Guardrail & Handrails A guardrail system is a system of building components located near the open sides of elevated walking surfaces for the purpose of minimizing the possibility of an accidental fall from the walking surface to the lower level. Minimum height all Use Groups 42", except Use Group R which is 36". In occupancies in Use Group A, B, H-4, I-
 - 1, I-2 M and R and public garages and open parking structures, open guards shall have balusters or be of solid material such that a sphere with a diameter of 4" cannot pass through any opening. Guards shall not have an ornamental pattern that would provide a ladder effect.
 - 9. Headroom in habitable space is a minimum of 7'6".
 - 10. Stair construction in Use Group R-3 & R-4 is a minimum of 10" tread and 7 3/4" maximum rise. All other Use group minimum 11" tread. 7" maximum rise.
 - 11. The minimum headroom in all parts of a stairway shall not be less than 80 inches.
 - 12. Every sleeping room below the fourth story in buildings of use Groups R and I-1 shall have at least one operable window or exterior door approved for emergency egress or rescue. The units must be operable from the inside without the use of special knowledge or separate tools. Where windows are provided as means of egress or rescue they shall have a sill height not more than 44 inches (1118mm) above the floor. All egress or rescue windows from sleeping rooms shall have a minimum net clear opening height dimension of 24 inches (610mm). The minimum net clear opening width dimension shall be 20 inches (508mm), and a minimum net clear opening of 5.7 sq. ft.
 - 13. Each apartment shall have access to two (2) separate, remote and approved means of egress. A single exit is acceptable when it exits directly from the apartment to the building exterior with no communications to other apartment units.
 - 14. All vertical openings shall be enclosed with construction having a fire rating of at lest one (1)hour, including fire doors with self closer's.
 - 15. The boiler shall be protected by enclosing with (1) hour fire-rated construction including fire doors and ceiling, or by providing automatic extinguishment.
 - 16. All single and multiple station smoke detectors shall be of an approved type and shall be installed in accordance with the provisions of the City's Building Code Chapter 9, Section 19, 920.3.2 (BOCA National Building Code/1996), and NFPA 101 Chapter 18 & 19. (Smoke detectors shall be installed and maintained at the following locations):
 - In the immediate vicinity of bedrooms
 - In all bedrooms
 - In each story within a dwelling unit, including basements

In addition to the required AC primary power source, required smoke detectors in occupancies in Use Groups R-2, P-2 and

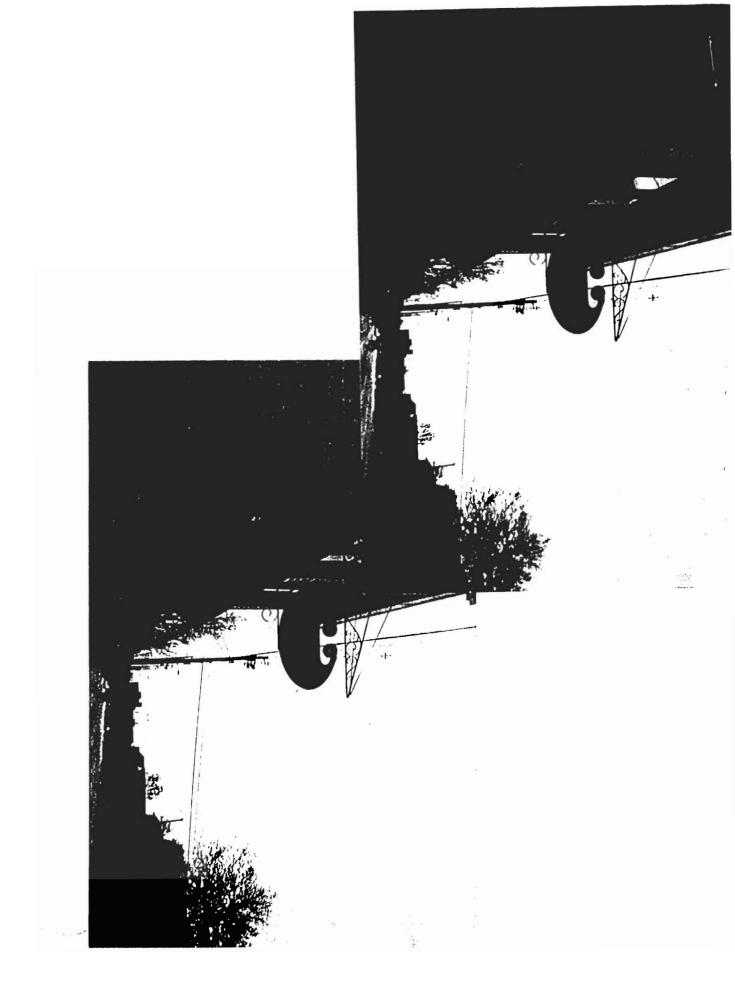

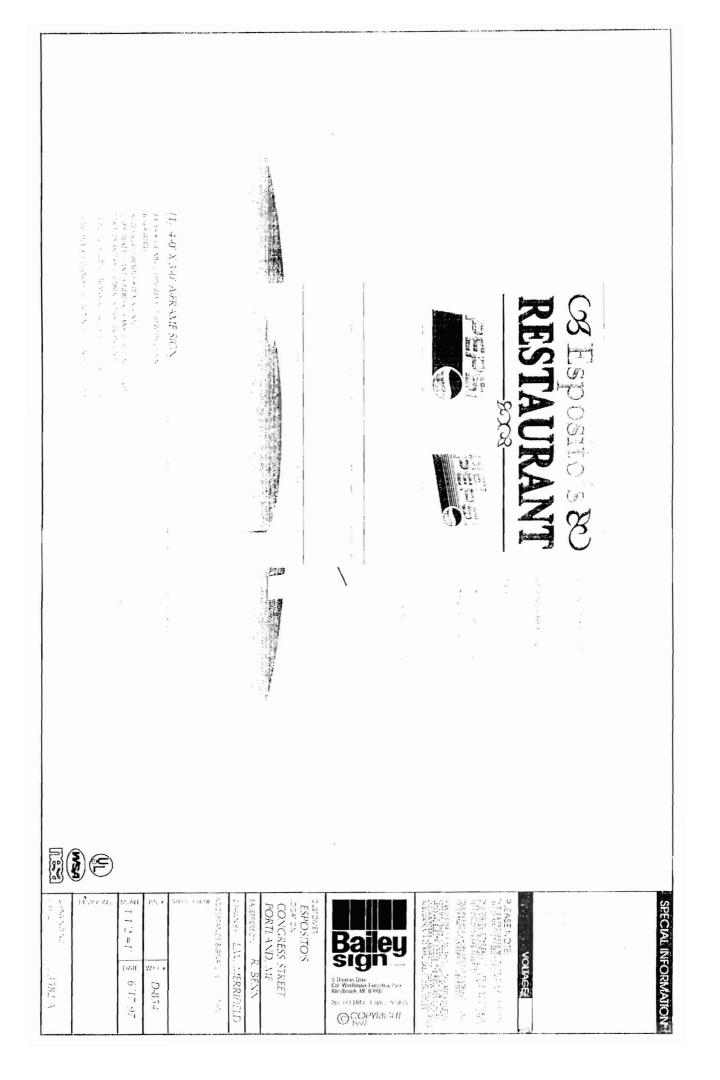

		ACTION THE ACTION AND A	$T_{\rm eff}(x) = T_{\rm eff}(x) + T_{\rm eff}(x) = T_{\rm eff}(x) + T_{\rm eff}(x) = T_{\rm eff}(x)$	おいていたからになるになって、 アイスティー しんしょう ロード・マイン アイ・ストレート マイン・ストロング マン・ストロング アイド・アイン アイドロー しょうてい しょうしょう しょうしょう	5 						3		The line & A second states	DIAUMANA	DECTATIDAN		N 23	1991 1991	m			
I Sector State Sta	₹ 5/4 ⁻ ¹ = 1 ⁻ 5/17 ⁻ 97			: (17)	1.1 BULENE & EDVICEBBOOK	Distance LAV AGERRIFIELD	AND, A	ESPOSITO'S	207	Bag Bag Brook MI 7/12k14 DOOR MI 7/12k14 DOOR MI	Executive Pa 04092 1 200 539 1	y wł		Construction of the second secon		U.A.A.A.A.A.A.A.A.A.A.A.A.A.A.A.A.A.A.A				1 > 2 at	MOLENIA STATIC	