


**1 WALL SECTION**  
SCALE: 3/4" = 1'-0"

**ASSEMBLY NOTES**

- A** LOW-PITCHED ROOF @ ADDITION -R-58: Membrane Roof, On Roofing Underlayment, On 4" EPS Rigid Insulation (R-25 min.), On "Zip System Roof Sheathing" w/ Taped Seams, On 2x Roof Framing w/ D.P. Cellulose Insulation (R-33 min.), On Wood Ceiling Formed to Curved Profile (See Section and Details)
- B** EXTERIOR WALL: -R-29 Wood Clapboard Siding (Variable Profile - See Elevations), On Rainscreen (1x3 K.D. strapping, incl. Cor-A-Vent at top and bottom of wall as insect screen), On 1/2" "Zip System Wall Sheathing" w/ Taped Seams (WRB & Air Barrier), On 2x6 Stud Wall w/ 2x3 Cross-Strapping w/ Full-Depth D.P. Cellulose (R-29), on GWB, Ptd.
- C** FRAMED FLOORS OVER UNCONDITIONED SPACE: -R-35 Finish Floor Material (See Interior Finish Schedule), On Structural Floor Sheathing (See Struct.), On Floor Joists (See Struct.) w/ Full-Depth D.P. Cellulose, On Zip System R-Sheathing w/ Taped Seams (Air Barrier)

03-s KTA Window & Door-South															
ID	Elevation	Width	Height	Quantity	Area	Type	Model #	Manufacturer	Material	Glazing	SHGC	U-Value	Egress	Tempered	Notes
01		2'-10"	4'-0"	1	11.33	Tilt/Turn		KOHLTECH	U-PVC	TRIPLE-GLAZED CARDIANAL 180	0.52	0.13	YES		
02		2'-10"	4'-0"	1	11.33	Tilt/Turn					0.52	0.13	YES		
03		4'-10"	4'-0"	1	21.75	Tilt/Turn					0.52	0.13			
04		4'-10"	4'-0"	1	21.75	Tilt/Turn					0.52	0.13			
05		2'-10"	4'-0"	1	11.33	Tilt/Turn					0.52	0.13	YES		
				5	77.49 sq ft										

DOOR SCHEDULE												
ID	Elevation	Width	Height	Thickness	Quantity	Model #	Manufacturer	Type	Finish	Glazing	Fire Rating	Notes
01		3'-0"	6'-8"	0'-1 3/4"	1		KOHLTECH			DOUBLE GLAZED		TEMPERED
E01		2'-8"	6'-8"	0'-1 3/4"	1		KOHLTECH			DOUBLE GLAZED		TEMPERED
					2							

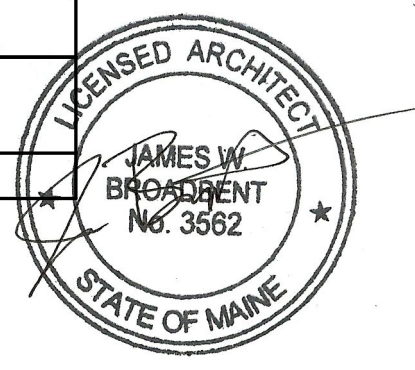

**2 WINDOW DETAILS**  
SCALE: 3" = 1'-0"

**FOR PERMIT**