

# AirTap™ Hybrid


The Next Generation Water heater

Available in 50 and 66 Gallon Models



- Best efficiency in the industry
- High recovery rate
- Made entirely from stainless steel 304
- 3/4" water inlet, outlet, and condensate line
- Backup heating element
- Top exhaust duct
- Releases cool dehumidified air at 400 cfm when heat pump is in operation
- User friendly touch pad controls
- Built in anode rod
- Easy access side connections
- Water temperature can be set anywhere between 90° F to 135° F
- 3 operation modes
  - Energy saver (heat pump only)
  - Hybrid (heat pump & electric element)
  - High demand (electric element only)
- 4 way reversing valve for auto defrost
- Auto overheat detection
- Environmental friendly refrigerant R410a
- Can operate efficiently in ambient temperature ranging between 20° F to 120° F
- Built in T&P valve
- Low nose unit
- Brass drain valve
- Limited Lifetime Warranty

Specifications	ATI50	ATI66
Tank size	50 gallons	66 gallons
Energy Factor (hybrid mode)	2.40	2.40
First Hour Rating (hybrid mode)	60 gallons	75 gallons
Heat Pump BTU Rating	10,000 (3kW)	10,000 (3kW)
Electric Element	4 kW	4 kW
Backup Electric Element	4 kW	4 kW
Compressor	Panasonic	Panasonic
Refrigerant	R410A	R410A
Tank Capsule	Stainless Steel 304	Stainless Steel 304
Diameter (D)	25.6 inches	25.6 inches
Height (H)	58.3 inches	69.3 inches
Weight	190 lbs	227 lbs
Duct Diameter (top of unit)	6 inches	6 inches
Decibel Rating	48	48
Voltage	220V	220V

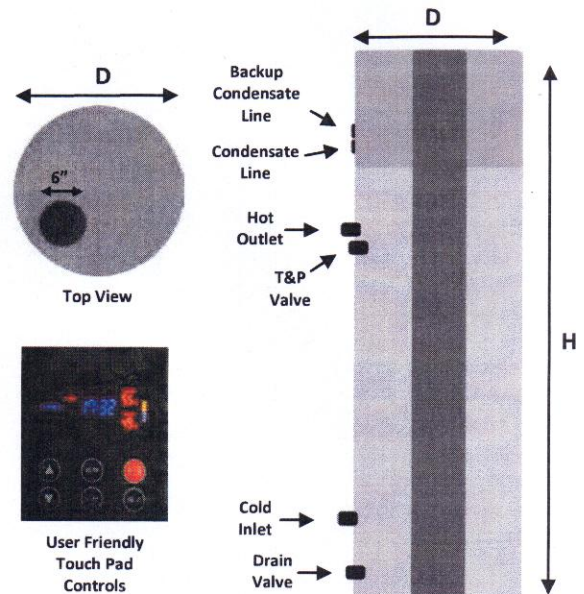

\*AirGenerate reserves the right to make changes without notice.



For more information about using AirTap™ Integrated in your home or business, contact:  
 Sales  
 8500 Commerce Park Drive, Houston, TX 77036 - U.S.A.  
 713.574.6729 or sales@airgenerate.com or visit www.airgenerate.com

