

NOTES:

- SEE SHEET M-001 FOR LEGEND AND ABBREVIATIONS.
- PROCEDURE ROOM 02 IS DESIGNED FOR 15 AIR CHANGES/HOUR AS REQUIRED FOR "X-RAY SURGICAL/CRITICAL CARE AND CATHETERIZATION" ROOMS IN THE 2006 AIA GUIDELINES FOR DESIGN AND CONSTRUCTION OF HEALTH CARE FACILITIES. THE ROOM IS ALSO DESIGNED TO BE POSITIVELY PRESSURIZED AS REQUIRED.

KEYED NOTES:



- REBALANCE VAV-1 TO 1305 CFM.
- ROUTE CONDENSATE DRAIN TO EXISTING CONDENSATE DRAIN. FIELD VERIFY EXACT LOCATION. PROVIDE WITH CONDENSATE PUMP IF REQUIRED.

DEMOLITION KEY NOTES:

- REMOVE FAN COIL, ASSOCIATED PIPING, CONTROLS, AND CONDENSING UNIT ON ROOF IN ITS ENTIRETY. RE-CLAIM REFRIGERANT AS REQUIRED. PREPARE CONDENSATE DRAIN FOR NEW FAN COIL UNITS.

144 Fore Street/P.O. Box 618
Portland, Maine 04104
tel. (207) 772-3846
fax. (207) 772-1070
www.smrinc.com

ARCHITECTURE
ENGINEERING
INTERIOR DESIGN
COMMISSIONING

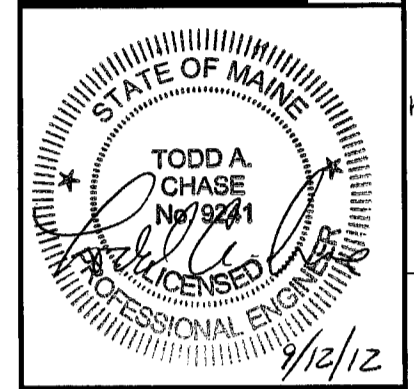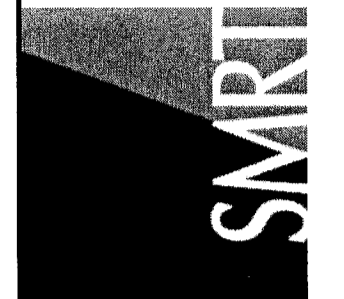

MERCY HOSPITAL
EQUIPMENT REPLACEMENT
PORTLAND, ME
ISSUED FOR CONSTRUCTION
9-12-12

REV.	DESCRIPTION	DATE
0	ISSUED FOR CONSTRUCTION	9-12-12

GRAPHIC SCALE:
0" = 1"

SCALE: AS NOTED
PROJECT MANAGER: KD
JC/DRAWN BY: MBD
A/E OF RECORD: TAC
CAD FILE: M-100-12076.DWG
PROJECT NO: 12076
DATE: -
SHEET TITLE:

HVAC
FLOOR PLANS

SHEET No.
M-100
© COPYRIGHT 2009 SMRT INC.

A1 DEMOLITION FLOOR PLAN
1/4"=1'-0"

A7 FLOOR PLAN
1/4"=1'-0"