

GENERAL NOTES:

1. THE CONTRACTOR SHALL CALL THE APPROPRIATE UTILITY COMPANIES AND DIG SAFE AT LEAST 72 HOURS PRIOR TO ANY EXCAVATION TO REQUEST EXACT FIELD LOCATION FOR UTILITIES. OTHERWISE IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY TO FIELD VERIFY THE LOCATION OF UNDERGROUND UTILITIES AND LOCATE ANY POTENTIAL CONFLICTS WITH THE APPROVED PLANS PRIOR TO CONSTRUCTION.
2. THE CONTRACTOR IS RESPONSIBLE FOR MAINTENANCE OF ALL EROSION CONTROL MEASURES SHOWN ON THE PLAN. IF DEEMED NECESSARY BY THE OWNER OR OWNER'S REPRESENTATIVE, ADDITIONAL EROSION CONTROL MEASURES SHALL BE INSTALLED AT NO ADDITIONAL COST TO THE OWNER.
3. THE CONTRACTOR SHALL PREPARE THEIR OWN MATERIAL SCHEDULE BASED ON THE PLANS AND FIELD VERIFICATION BY THE CONTRACTOR. ALL MATERIAL SCHEDULES SHOWN WITHIN THE PLAN SET ARE FOR GENERAL INFORMATION ONLY.
4. ALL CONSTRUCTION METHODS, TESTING AND MATERIALS SHALL CONFORM TO THE MAINE DEPARTMENT OF TRANSPORTATION SPECIFICATIONS, THE CITY OF PORTLAND AND SERVICING UTILITY REQUIREMENTS, IF ANY. IN CASES WHERE THESE CONFLICT THE MOST STRINGENT SPECIFICATION SHALL APPLY AT NO ADDITIONAL COST TO THE OWNER.
5. THE SITE CONTRACTOR SHALL MAINTAIN A SET OF PAPER AND CAD DRAWINGS WHICH SHALL RECORD THE ACTUAL LOCATION, DIMENSIONS, ELEVATIONS, MATERIALS OF THEIR WORK, INDICATING THEREON ALL VARIATIONS FROM THE CONTRACT DRAWINGS. THE CONTRACTOR SHALL PROVIDE THE OWNER WITH ONE COMPLETE SET OF REPRODUCIBLE RECORD DRAWINGS, IN AUTOCAD FORMAT AND PAPER, STAMPED "AS-BUILT". IF AUTOCAD NOT AVAILABLE EXCLUDE FROM BID IN WRITING.
6. THE CONTRACTOR WILL REMAIN SOLELY AND COMPLETELY RESPONSIBLE FOR ENFORCEMENT OF AND COMPLIANCE WITH 1) ALL CONTRACT PLANS AND SPECIFICATIONS, 2) APPLICABLE INTERNATIONAL BUILDING CODE REQUIREMENTS, AND 3) ALL SITE WORKING CONDITIONS AND SAFETY REQUIREMENTS. DAY AND NIGHT, FOR BOTH PERSONS AND PROPERTY, IN EACH CASE BOTH BY THE CONTRACTOR AND ITS SUBCONTRACTORS. THESE INCLUDE ALL OSHA, NIOSH, U.S. EPA AND ANY OTHER APPLICABLE GOVERNMENTAL REGULATIONS.
7. EXISTING CONDITIONS, BOUNDARY SURVEY AND TOPOGRAPHIC FROM THE PLAN TITLED EXISTING CONDITIONS SURVEY BY BH2M SURVEYING FOR 197 SPRING STREET, DATED JANUARY 26TH, 2017.
8. THE CONTRACTOR IS RESPONSIBLE FOR MAINTAINING ACCESS TO THE SITE AND ALL ADJACENT PROPERTIES AT ALL TIMES. THE CONTRACTOR SHALL BE RESPONSIBLE FOR ALL TEMPORARY MARKINGS, SIGNAGE AND INCIDENTALS TO MAINTAIN A SAFE VEHICLE AND PEDESTRIAN ACCESS THROUGH THE LIFE OF THE PROJECT. THE CONTRACTOR SHALL NOTIFY THE PORTLAND PUBLIC SAFETY DIVISION ROUTINELY REGARDING TEMPORARY IMPACTS OR CHANGES TO SITE ACCESS CONDITIONS.
9. CONSTRUCTION MANAGEMENT PLAN BY ACORN ENGINEERING INC. SHALL BE REFERRED TO FOR ANTICIPATED PROJECT SCHEDULE AND CLOSURES. TRAFFIC CONTROL SHALL BE THE SOLE RESPONSIBILITY OF THE CONTRACTOR.
10. CONTRACTOR TO DETERMINE SOIL CLASSIFICATION INDEPENDENTLY FOR TRENCH, SHORING, AND OTHER SIMILAR CONSTRUCTION MEANS AND METHODS APPLICATIONS.
11. THE CONTRACTOR SHALL CONDUCT A PRE-CONSTRUCTION SURVEY OF INTERIOR SUBGRADE AND ABOVE GRADE ACCESSIBLE WALLS, CEILINGS, FLOORS, ROOF AND VISIBLE EXTERIOR AS VIEWED FROM THE GRADE LEVEL. THIS SHALL BE COMPLETED AT A MINIMUM FOR 197 SPRING STREET. A COPY OF THE SURVEY SHOULD BE PROVIDED TO THE OWNER.
12. THE CONTRACTOR SHALL SURVEY ROCK SURFACE PRIOR TO EXCAVATION AND DEVELOP VOLUME CALCULATIONS TO SHARE WITH ACORN, IF ANY.

CIVIL SITE NOTES:

1. THE CONTRACTOR SHALL SUBMIT IN WRITING ANY REQUESTS TO MODIFY THE CONTRACT DOCUMENTS.
2. ALL SHOP AND ERECTION DRAWINGS SHALL BE CHECKED AND STAMPED BY THE GENERAL CONTRACTOR PRIOR TO SUBMISSION FOR ENGINEER'S REVIEW. ANY UNCHECKED OR NON-STAMPED SUBMITTALS WILL BE RETURNED WITHOUT REVIEW.
3. CONTRACTOR SHALL THOROUGHLY INSPECT AND SURVEY EXISTING STRUCTURES AND SITE TO VERIFY CONDITIONS THAT AFFECT THE WORK SHOWN ON THE DRAWINGS. CONTRACTOR TO NOTIFY THE ENGINEER OF ANY DISCREPANCIES PRIOR TO PROCEEDING.
4. DETAILS SHOWN APPLY TO ALL SIMILAR CONDITIONS UNLESS OTHERWISE INDICATED.
5. ALTHOUGH ALL DUE DILIGENCE HAS BEEN APPLIED TO MAKE THE DRAWINGS AS COMPLETE AS POSSIBLE, NOT ALL DETAILS ARE ILLUSTRATED, NOR IS EVERY EXCEPTION CONDITION ADDRESSED WITHIN THE CONTRACT DOCUMENTS.
6. ALL PROPRIETARY CONNECTIONS SHALL BE INSTALLED IN ACCORDANCE WITH THE MANUFACTURER'S RECOMMENDATIONS.
7. THE GENERAL CONTRACTOR IS RESPONSIBLE FOR THE COORDINATION OF ALL WORK, INCLUDING DIMENSION AND LAYOUT VERIFICATION, MATERIALS COORDINATION, SHOP DRAWING REVIEW, AND THE WORK OF ANY SUBCONTRACTORS.
8. UNLESS OTHERWISE SPECIFICALLY INDICATED, THE DRAWINGS DO NOT DESCRIBE OR DIRECT MEANS OR METHODS OF CONSTRUCTION.
9. THE CONTRACTOR, IN THE PROPER SEQUENCE, SHALL PERFORM OR SUPERVISE ALL WORK NECESSARY TO ACHIEVE THE FINAL COMPLETED STRUCTURE, AND TO PROTECT THE STRUCTURE, WORKMEN, AND OTHERS DURING THE CONSTRUCTION. SUCH WORK SHALL INCLUDE, BUT NOT BE LIMITED TO, BRACING, SHORING FOR CONSTRUCTION EQUIPMENT, SHORING FOR EXCAVATION, FORMWORK, SCAFFOLDING, SAFETY DEVICES AND PROGRAMS OF ALL KINDS, SUPPORT AND BRACING FOR CRANES AND OTHER ERECTION EQUIPMENT.
10. DO NOT BACKFILL AGAINST RETAINING WALLS UNTIL SUPPORTING SLABS AND FLOOR FRAMING ARE IN PLACE AND SECURELY ANCHORED, UNLESS ADEQUATE BRACING IS PROVIDED.
11. TEMPORARY BRACING SHALL REMAIN IN PLACE UNTIL ALL FLOORS, WALLS, ROOFS AND OTHER SUPPORTING ELEMENTS ARE IN PLACE.
12. THE ENGINEER BEARS NO RESPONSIBILITY FOR THE ABOVE ITEMS, AND OBSERVATION VISITS TO THE SITE DO NOT IN ANY WAY INCLUDE INSPECTION OF THEM.

SPECIAL INSPECTION NOTES:

1. ALL SITE SOILS-RELATED WORK AND FOOTING EXCAVATIONS PRIOR TO PLACING FORMS, AS WELL AS SITE DRAINAGE, SHALL BE REVIEWED BY THE PROJECT GEOTECHNICAL ENGINEER.
2. NORMAL REVIEWS BY LOCAL BUILDING DEPARTMENT.
3. NOTIFY 48 HOURS PRIOR TO REQUIRED REVIEW.
4. REQUIRED SPECIAL INSPECTIONS PER I.B.C. SECTION 1705.6 BY AN APPROVED SPECIAL INSPECTOR RETAINED BY OWNER. CONTRACTOR TO COORDINATE SPECIAL INSPECTIONS.
5. SPECIAL INSPECTOR SHALL BE A QUALIFIED PERSON WHO SHALL DEMONSTRATE COMPETENCE, TO THE SATISFACTION OF THE BUILDING OFFICIAL, FOR INSPECTION OF THE PARTICULAR TYPE OF CONSTRUCTION OR OPERATION REQUIRING SPECIAL INSPECTION.
6. DUTIES AND RESPONSIBILITIES OF THE SPECIAL INSPECTOR SHALL BE TO OBSERVE AND/OR TEST THE WORK ASSIGNED AND OUTLINE ABOVE FOR CONFORMANCE WITH THE CONTRACT DOCUMENTS, ALL DISCREPANCIES SHALL BE BROUGHT TO THE IMMEDIATE ATTENTION OF THE CONTRACTOR FOR CORRECTION.
7. THE SPECIAL INSPECTOR SHALL FURNISH REGULAR REPORTS TO THE BUILDING OFFICIAL, THE ARCHITECT AND ENGINEER OF RECORD, AND OTHER DESIGNATED PERSONS. PROGRESS REPORTS FOR CONTINUOUS INSPECTION SHALL BE FURNISHED WEEKLY. INDIVIDUAL REPORTS OF PERIODIC INSPECTIONS SHALL BE FURNISHED WITHIN ONE WEEK OF INSPECTION DATES. THE REPORTS SHALL NOTE UNCORRECTED DEFICIENCIES, AND NET CHANGES TO THE APPROVED CONSTRUCTION DOCUMENTS AUTHORIZED BY THE ENGINEER OF RECORD.
8. THE SPECIAL INSPECTOR SHALL SUBMIT A FINAL SIGNED REPORT WITHIN TEN DAYS OF THE FINAL INSPECTION STATING WHETHER THE WORK REQUIRING A SPECIAL INSPECTION WAS, TO THE BEST OF THE INSPECTOR'S KNOWLEDGE AND BELIEF, IN CONFORMANCE WITH THE APPROVED CONSTRUCTION DOCUMENTS AND THE APPLICABLE WORKMANSHIP PROVISIONS OF THE INTERNATIONAL BUILDING CODE. WORK NOT IN COMPLIANCE SHALL BE NOTED IN THE REPORT.
9. SPECIAL INSPECTION FIRM SHALL BE EMPLOYED BY WAIT LLC. AND COORDINATED BY THE CONTRACTOR.

LAYOUT NOTES:

1. MONUMENTS DELINEATING PROPERTY LINES OR RIGHT OF WAYS SHALL NOT BE DISTURBED DURING CONSTRUCTION OPERATIONS. IN THE CASE A MONUMENT IS DISTURBED, OR ELEVATION AT THE CONTRACTOR'S EXPENSE, THE MONUMENT SHALL BE RESET

TO THEIR ORIGINAL LOCATION BY A REGISTERED LAND SURVEYOR.

2. ALL DIMENSIONS ON THE FOLLOWING SHEETS TAKE PRECEDENT OVER SCALED DIMENSIONS. EACH DRAWING WITH A BAR SCALE MEANS THAT THE DRAWING/DETAIL HAS BEEN SCALED AS ACCURATELY AS POSSIBLE, AND THE BAR SCALE IS FOR GENERAL REFERENCE ONLY. IF NO BAR SCALE IS PRESENT, THEN THERE IS NO SCALE TO THAT DRAWING/DETAIL. AT NO TIME SHOULD DRAWINGS BE SCALED FROM. ANY DISCREPANCIES BETWEEN DRAWINGS, DETAILS, SPECIFICATIONS AND THE FIELD CONDITION SHALL BE IMMEDIATELY REPORTED TO THE CIVIL ENGINEER FOR FURTHER DIRECTIONS BEFORE ANY ADDITIONAL WORK PROCEEDS.
3. SIGNAGE, STRIPING AND PAVEMENT MARKINGS SHALL BE IN ACCORDANCE WITH THE MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES (MUTCD).
4. ALL TRAFFIC CONTROL SIGNS INDICATED ON THE SITE LAYOUT PLAN ARE TO MEET ALL REQUIREMENTS & CONDITIONS OF THE CITY OF PORTLAND, MAINE DEPARTMENT OF TRANSPORTATION AND THE MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES, LATEST EDITION.
5. THE CONTRACTOR SHALL OBTAIN THE SERVICES OF A LICENSED PROFESSIONAL LAND SURVEYOR TO PROVIDE A MINIMUM OF TWO TEMPORARY BENCHMARKS WITHIN THE SITE AND TO LOCATE PROPOSED FOUNDATION CORNERS.
6. CONTRACTOR TO ENSURE THAT DRIVEWAYS AND MAILBOXES ADJACENT TO THE PROJECT REMAIN FUNCTIONAL AND IN USE AT ALL TIMES.

PERMITTING NOTES

1. THIS PROJECT IS SUBJECT TO THE TERMS AND CONDITIONS OF SITE PLAN - LEVEL III AND SUBDIVISION PERMIT FROM THE CITY OF PORTLAND.
2. THE CONTRACTOR SHALL REVIEW THE ABOVE REFERENCED PERMITS PRIOR TO SUBMITTING A BID FOR THIS PROJECT, AND INCLUDE COSTS AS NECESSARY TO COMPLY WITH THE CONDITIONS OF THESE PERMITS.

GRADING AND DRAINAGE NOTES:

1. TOPSOIL STRIPPED FROM THE SITE THAT IS SUITABLE FOR REUSE AS LOAM SHALL BE STOCKPILED WITHIN THE PROPOSED LIMIT OF WORK AREA. THE CONTRACTOR SHALL NOT ASSUME THAT ANY LOAM WILL BE ACCEPTABLE FOR REUSE WITH THEIR ESTIMATE.
2. THE CONTRACTOR SHALL ANTICIPATE THAT GROUNDWATER WILL BE ENCOUNTERED DURING CONSTRUCTION AND SHALL INCLUDE SUFFICIENT COSTS WITHIN THEIR BID TO PROVIDE DEWATERING AS NECESSARY; NO SEPARATE PAYMENT SHALL BE MADE TO THE CONTRACTOR FOR DEWATERING. SEE BORING LOGS FOR ADDITIONAL INFORMATION.
3. THE OWNER SHALL BE RESPONSIBLE FOR OBTAINING ANY EASEMENT OR TEMPORARY CONSTRUCTION RIGHTS AS NECESSARY BY PRIVATE ADJACENT LAND OWNERS. THE CONTRACTOR SHALL NOT DISTURB ANY SOIL BEYOND THE PROPERTY LINE WITHOUT NOTIFYING AND OBTAINING SUCH EASEMENT OR TEMPORARY CONSTRUCTION RIGHT FROM THE OWNER. PRIOR TO THE CONTRACTOR PRICING THE WORK THE CONTRACTOR SHALL REQUEST PROOF OF SUCH EASEMENT OR TEMPORARY RIGHTS. SHOULD EASEMENTS OR TEMPORARY RIGHTS NOT BE AVAILABLE THE CONTRACTOR SHALL INCLUDE COST FOR BRACING AND SHORING AS NECESSARY.
4. THE CONTRACTOR SHALL PROVIDE A FINISH PAVEMENT SURFACE FREE OF LOW SPOTS AND PONDING AREAS. THE MINIMUM SLOPE SHALL MEET OR EXCEED 0.5% IN ALL CASES. ALL SLOPES SHALL BE AWAY FROM BUILDINGS AND TOP OF PAVEMENT SHALL BE AT OR BELOW EXISTING FINISH FLOOR ELEVATIONS.
5. NO ADDITIONAL PAYMENT FOR UNSUITABLE MATERIALS.
6. ALL STORM DRAIN PIPE SHALL BE SMOOTH BORE INTERIOR PROVIDING A MANNINGS ROUGHNESS COEFFICIENT OF N=0.012 OR LESS.
7. ADJUST ALL MANHOLES, CATCH BASINS, CURB BOXES, ETC. WITHIN LIMITS OF WORK TO FINISH GRADE.
8. NATIVE SOILS. IT IS THE CONTRACTOR'S RESPONSIBILITY TO LIMIT THE DISTURBANCE TO SUBGRADE SOILS. SHOULD THE SUBGRADE BECOME YIELDING OR DIFFICULT TO WORK, DISTURBED AREAS SHALL BE EXCAVATED AND BACKFILLED WITH COMPACTED SELECT FILL OR CRUSHED STONE AT NO ADDITIONAL EXPENSE TO THE OWNER. ALL SUBGRADE PREPARATION IS SUBJECT TO THE RECOMMENDATIONS OF THE PROJECT GEOTECHNICAL ENGINEER.

EROSION CONTROL NOTES:

1. ALL ROUTINE MAINTENANCE ACTIVITIES SHALL BE CONDUCTED IN SUCH A WAY TO LIMIT THE AMOUNT OF DISTURBED AREA AT ONE TIME TO THE EXTENT PRACTICABLE.
2. PRIOR TO THE START OF ANY CLEARING/LAND DISTURBING ACTIVITIES, THE CONTRACTOR SHALL INSTALL APPLICABLE EROSION CONTROL DEVICES SUCH AS PERIMETER SILT FENCE, AND OTHER APPLICABLE MEASURES. IN THE EVENT THE CONTRACTOR IS NOT SURE A EROSION CONTROL MEASURE SHOULD BE IMPLEMENTED, THE CONTRACTOR SHALL CONTACT THE ENGINEER OF RECORD TO CONFIRM IMPLEMENTATION OF ANY EROSION CONTROL DEVICES.
3. ALL GROUND AREAS GRADED FOR CONSTRUCTION SHALL BE GRADED, LOAMED, SEEDED AND MULCH SHALL BE APPLIED AS SOON AS POSSIBLE WITHIN 7 DAYS FOLLOWING THE COMPLETION OF ANY SOIL DISTURBANCE, AND PRIOR TO ANY STORM EVENT.
4. EROSION AND SEDIMENTATION CONTROL MEASURES SHALL BE INSTALLED TO THE SATISFACTION OF THE CITY. THE CONTRACTOR SHALL REFERENCE THE APPROVED EROSION AND SEDIMENTATION CONTROL REPORT FOR TEMPORARY AND PERMANENT EROSION AND SEDIMENTATION CONTROL DEVICES IN ADDITION TO THE PLAN SET. THE CONTRACTOR SHALL ALSO REFER TO THE MAINE D.E.P.'S PERMIT CONDITIONS, FINDINGS OF FACT AND ORDER (IF ANY), AND THE CURRENT MAINE EROSION AND SEDIMENT CONTROL BMP MANUAL FOR ADDITIONAL INFORMATION.
5. AFTER PAVING OPERATIONS ARE COMPLETE, THE CONTRACTOR SHALL REMOVE ALL SEDIMENT FROM STORM DRAINS, CATCH BASINS, AND APPURTENANCES.
6. REFER TO THE EROSION CONTROL DETAILS & NOTES FOR ADDITIONAL INFORMATION.


UTILITY NOTES:

1. THE CONTRACTOR IS SPECIFICALLY CAUTIONED THAT THE LOCATION AND ELEVATION OF THE EXISTING UTILITIES AS SHOWN ON THESE PLANS IS BASED UPON RECORDS OF VARIOUS UTILITY COMPANIES AND, WHERE POSSIBLE, MEASUREMENTS TAKEN IN THE FIELD. THIS INFORMATION IS NOT TO BE RELIED UPON AS BEING EXACT OR COMPLETE. IT SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR TO TEST PIT TO DETERMINE THE EXACT LOCATION AND ELEVATION OF UTILITIES TO COORDINATE WITH THE PROPOSED CONNECTIONS OR CROSSING. ANY DISCREPANCIES SHALL BE IMMEDIATELY REPORTED TO THE CIVIL ENGINEER FOR FURTHER DIRECTIONS BEFORE ANY ADDITIONAL WORK PROCEEDS.
2. CONTRACTOR SHALL, AT NO ADDITIONAL COST TO THE OWNER, CONDUCT EXPLORATORY EXCAVATIONS AT LOCATIONS WHERE PROPOSED EXCAVATION WILL INTERSECT WITH EXISTING UTILITIES.
3. CONTRACTOR TO PROVIDE 5' OF COVER FROM TOP OF PIPE TO FINISH GRADE FOR WATER MAINS.
4. WATER INFRASTRUCTURE SHALL BE TESTED IN ACCORDANCE WITH THE PORTLAND WATER DISTRICT DOCUMENT "WATER AND SEWER CONSTRUCTION SPECIFICATIONS AND PROCEDURES", MOST RECENT REVISION.
5. CONTRACTOR SHALL COORDINATE WORK REGARDING ANY WATER MAIN CONNECTION AND WATER MAIN SHUTDOWN WITH THE PORTLAND WATER DISTRICT AT LEAST SEVEN (7) DAYS PRIOR TO CONSTRUCTION.
6. ALL WATER PIPE INSTALLATION SHALL CONFORM WITH THE PORTLAND WATER DISTRICT SPECIFICATIONS AND PROCEDURES, MOST RECENT EDITION.
7. IT SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR TO RELOCATE ALL EXISTING UTILITIES WHICH CONFLICT WITH THE PROPOSED IMPROVEMENTS SHOWN ON THE PLANS.
8. SEWER, GAS, TELEPHONE, ELECTRICITY, CABLE, WATER AND ANY OTHER UTILITY CONNECTIONS SHALL BE REVIEWED BY PLUMBING, ELECTRICAL, AND MECHANICAL DESIGNER FOR CONSISTENCY WITH THEIR PLANS PRIOR TO CONSTRUCTION.
9. COORDINATE EXIT POINT FOR SECONDARY SERVICE WITH THE ARCHITECT/ELECTRICAL ENGINEER. SECONDARY LINE LOCATIONS NOT PROVIDED BY ACORN ENGINEERING WITHIN THE UTILITY PLAN.
10. IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY TO OBTAIN ALL THE NECESSARY PERMITS FOR THE INSTALLATION OF THE UTILITIES AND STORMDRAINS WITHIN THE PUBLIC RIGHT OF WAY. THE CONTRACTOR SHALL SUBMIT A MAINTENANCE OF TRAFFIC PLAN TO THE CITY IN ACCORDANCE WITH THE CITY OF PORTLAND TECHNICAL MANUAL PRIOR TO ANY WORK.
11. THE CONTRACTOR SHALL PROVIDE AND INSTALL ALL BOXES, FITTINGS, CONNECTORS, COVER PLATES AND OTHER MISCELLANEOUS


ITEMS NOT NECESSARILY DETAILED ON THE DRAWINGS TO RENDER INSTALLATION OF UTILITIES COMPLETE AND OPERATIONAL AT NO EXTRA EXPENSE TO THE OWNER.

ISSUED FOR	BY
PRELIM. APP.	WHS
	3/15/17

DRAWING NAME: GENERAL NOTES	CLIENT: WAIT, LLC.
PROJECT NAME: 197 SPRING STREET - RENOVATION AND ALTERATION	P.O. BOX 25A, CUMBERLAND, ME 04021

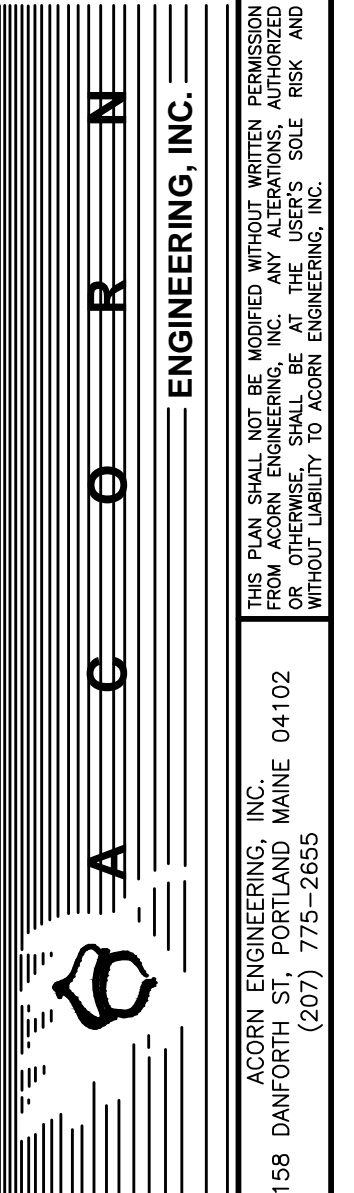

FILE:	1081_CIVIL
JN:	1081
SCALE:	NTS
DESIGNED BY:	WHS
DRAWN BY:	MCB
CHECKED BY:	WHS

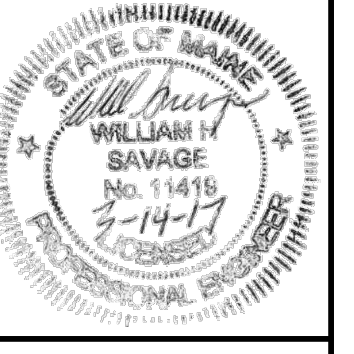

PRELIMINARY
NOT ISSUED FOR
CONSTRUCTION

DRAWING NO.
C-02