

NOTES:

ELECTRICAL CONTRACTOR TO SCHEDULE ON-SITE REVIEW OF PROJECT PRIOR TO ROUGH-IN.

CENTER SWITCHES AT 42" AFF UNLESS OTHERWISE NOTED.

CENTER OUTLETS AT 16" AFF UNLESS OTHERWISE NOTED.

OUTLETS TO BE LOCATED PER PLANS, ADD OUTLETS AS REQ'D BY CODE.

SMOKE DETECTORS/CO TO CODE.


NO MORE THAN 4 SWITCHES GANGED IN ONE BOX. IF MORE THAN 4 SWITCHES ARE REQUIRED, STACK 2 BOXES ABOVE ONE ANOTHER WITH EQUAL NUMBER OF SWITCHES IN EACH BOX. USE DUMMY SWITCH IF NECESSARY.


BATH FAN/LIGHTS TO BE PANASONIC UNITS, FANS TO BE ON TIMER SWITCHES.


SECOND FLOOR HEAT: RADIANT MATS AT BATHROOMS

COMMUNICATION: N/A

R E N O A T O T H E R E C O R E I N A P A R T M E N T 29 DEERING STREET #2 - PORTLAND, MAINE 04101



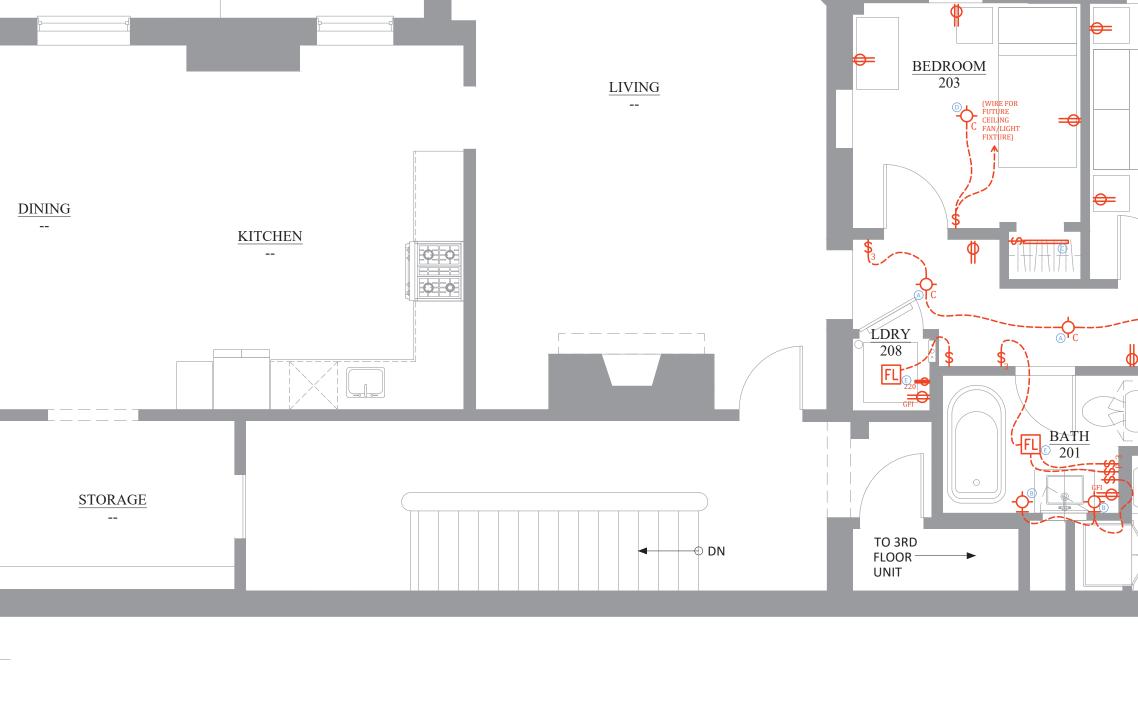


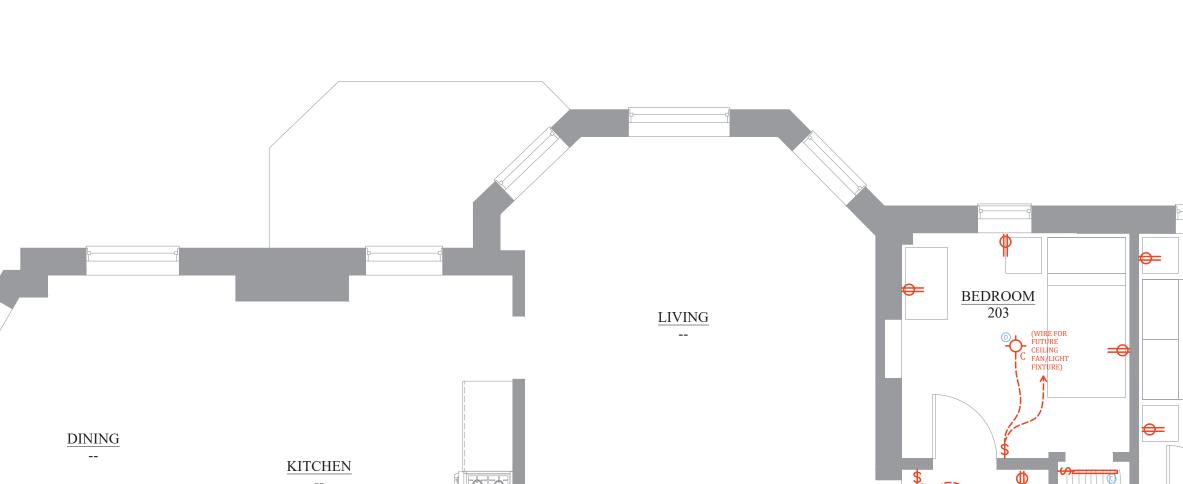





ELECTRICAL SCHEDULE

Tag	Description	Model	Manuf.	Finish	Lamp	Wattage	Voltage	Mounting	Qty	Remarks
А	Surface Mount	TBD	TBD	TBD				Ceiling	5	
В	Wall Sconce	TBD	TBD	TBD				Wall	2	(Allow \$200/per fixture)
С	24" LED Tube Light	TBD	TBD	TBD				Ceiling/wall	3	
D	Surface Mount	TBD	TBD	TBD				Ceiling	3	
E	Exhaust Fan/Light	WhisperGreen Select FV- 11 VQCL6	Panasonic					Recessed Ceiling	3	110 CFM, 0.7 sone ceiling fan with motion and humidity sensors and CFL light. Use Panasonic FV-WCD02FV-WCD02Whisper Control 4 Function Light Switch
F	Recessed light (wet location)	RZR-600-12W- 3K-SC	NDR Electric	Satin Chrome		12W	120	Recessed Ceiling	1	3000k, 950 Lumens
G	Surface Mount	TBD	TBD	TBD				Wall	2	(Allow \$200/per fixture)

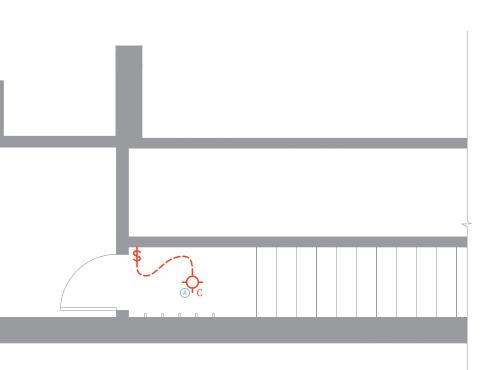

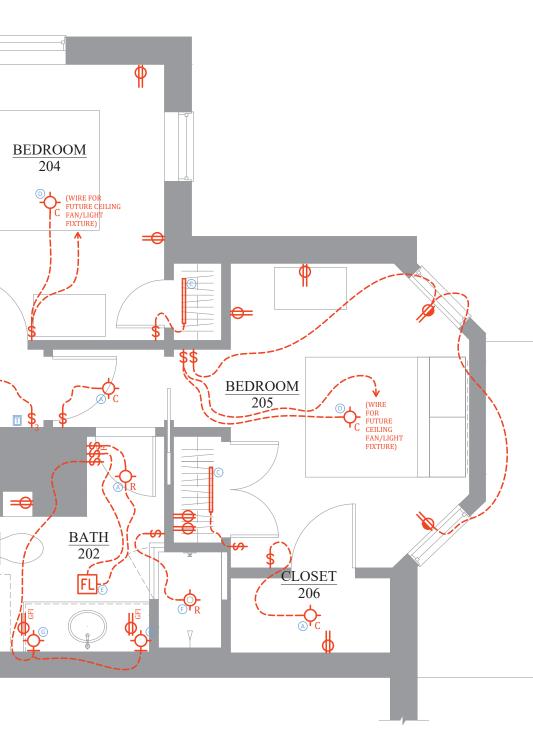

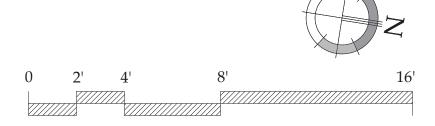

	DATE	June 14, 2017	SHEET
ISSUED FOR PERMITTING & CONSTRUCTION	REV		F101
PERMITTING & CONSTRUCTION	REV	IV	