

9'6"


Header material  
2x10x2 with  
1/2 plywood

King/Jack/cripples: 2x4  
Studs



Reviewed for Code Compliance  
Permitting and Inspections Department  
Approved with Conditions

02/27/2019  
WALL


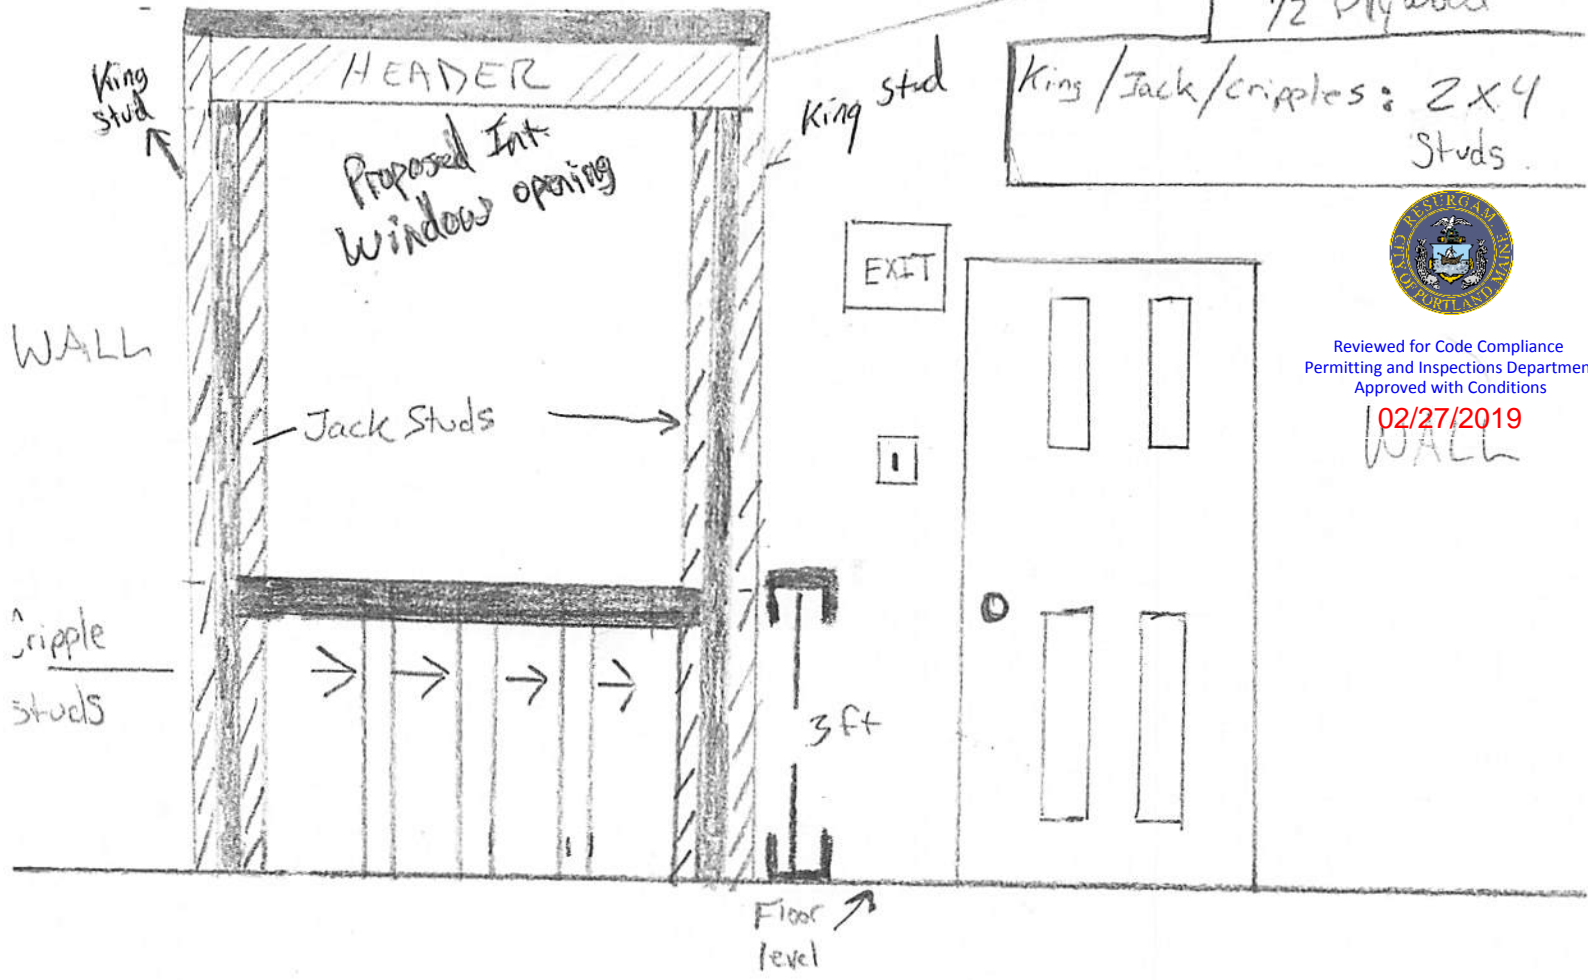



Hallway

Ceiling Height: 9ft

Proposed Int. window opening: 4'x4'

Header materials: Double 2x10 with  
1/2 plywood.

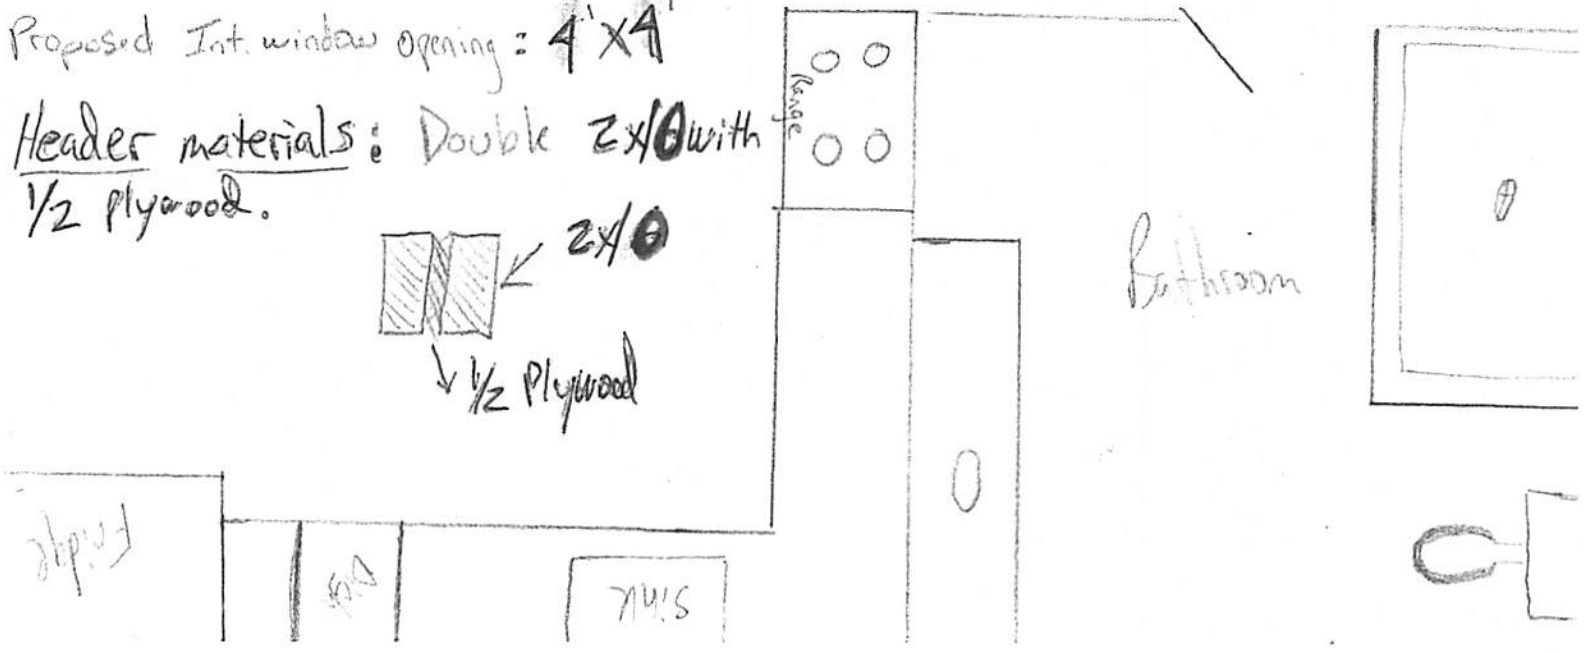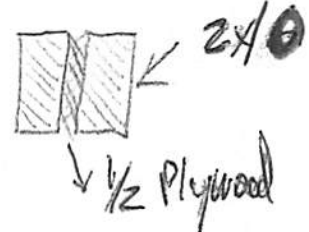

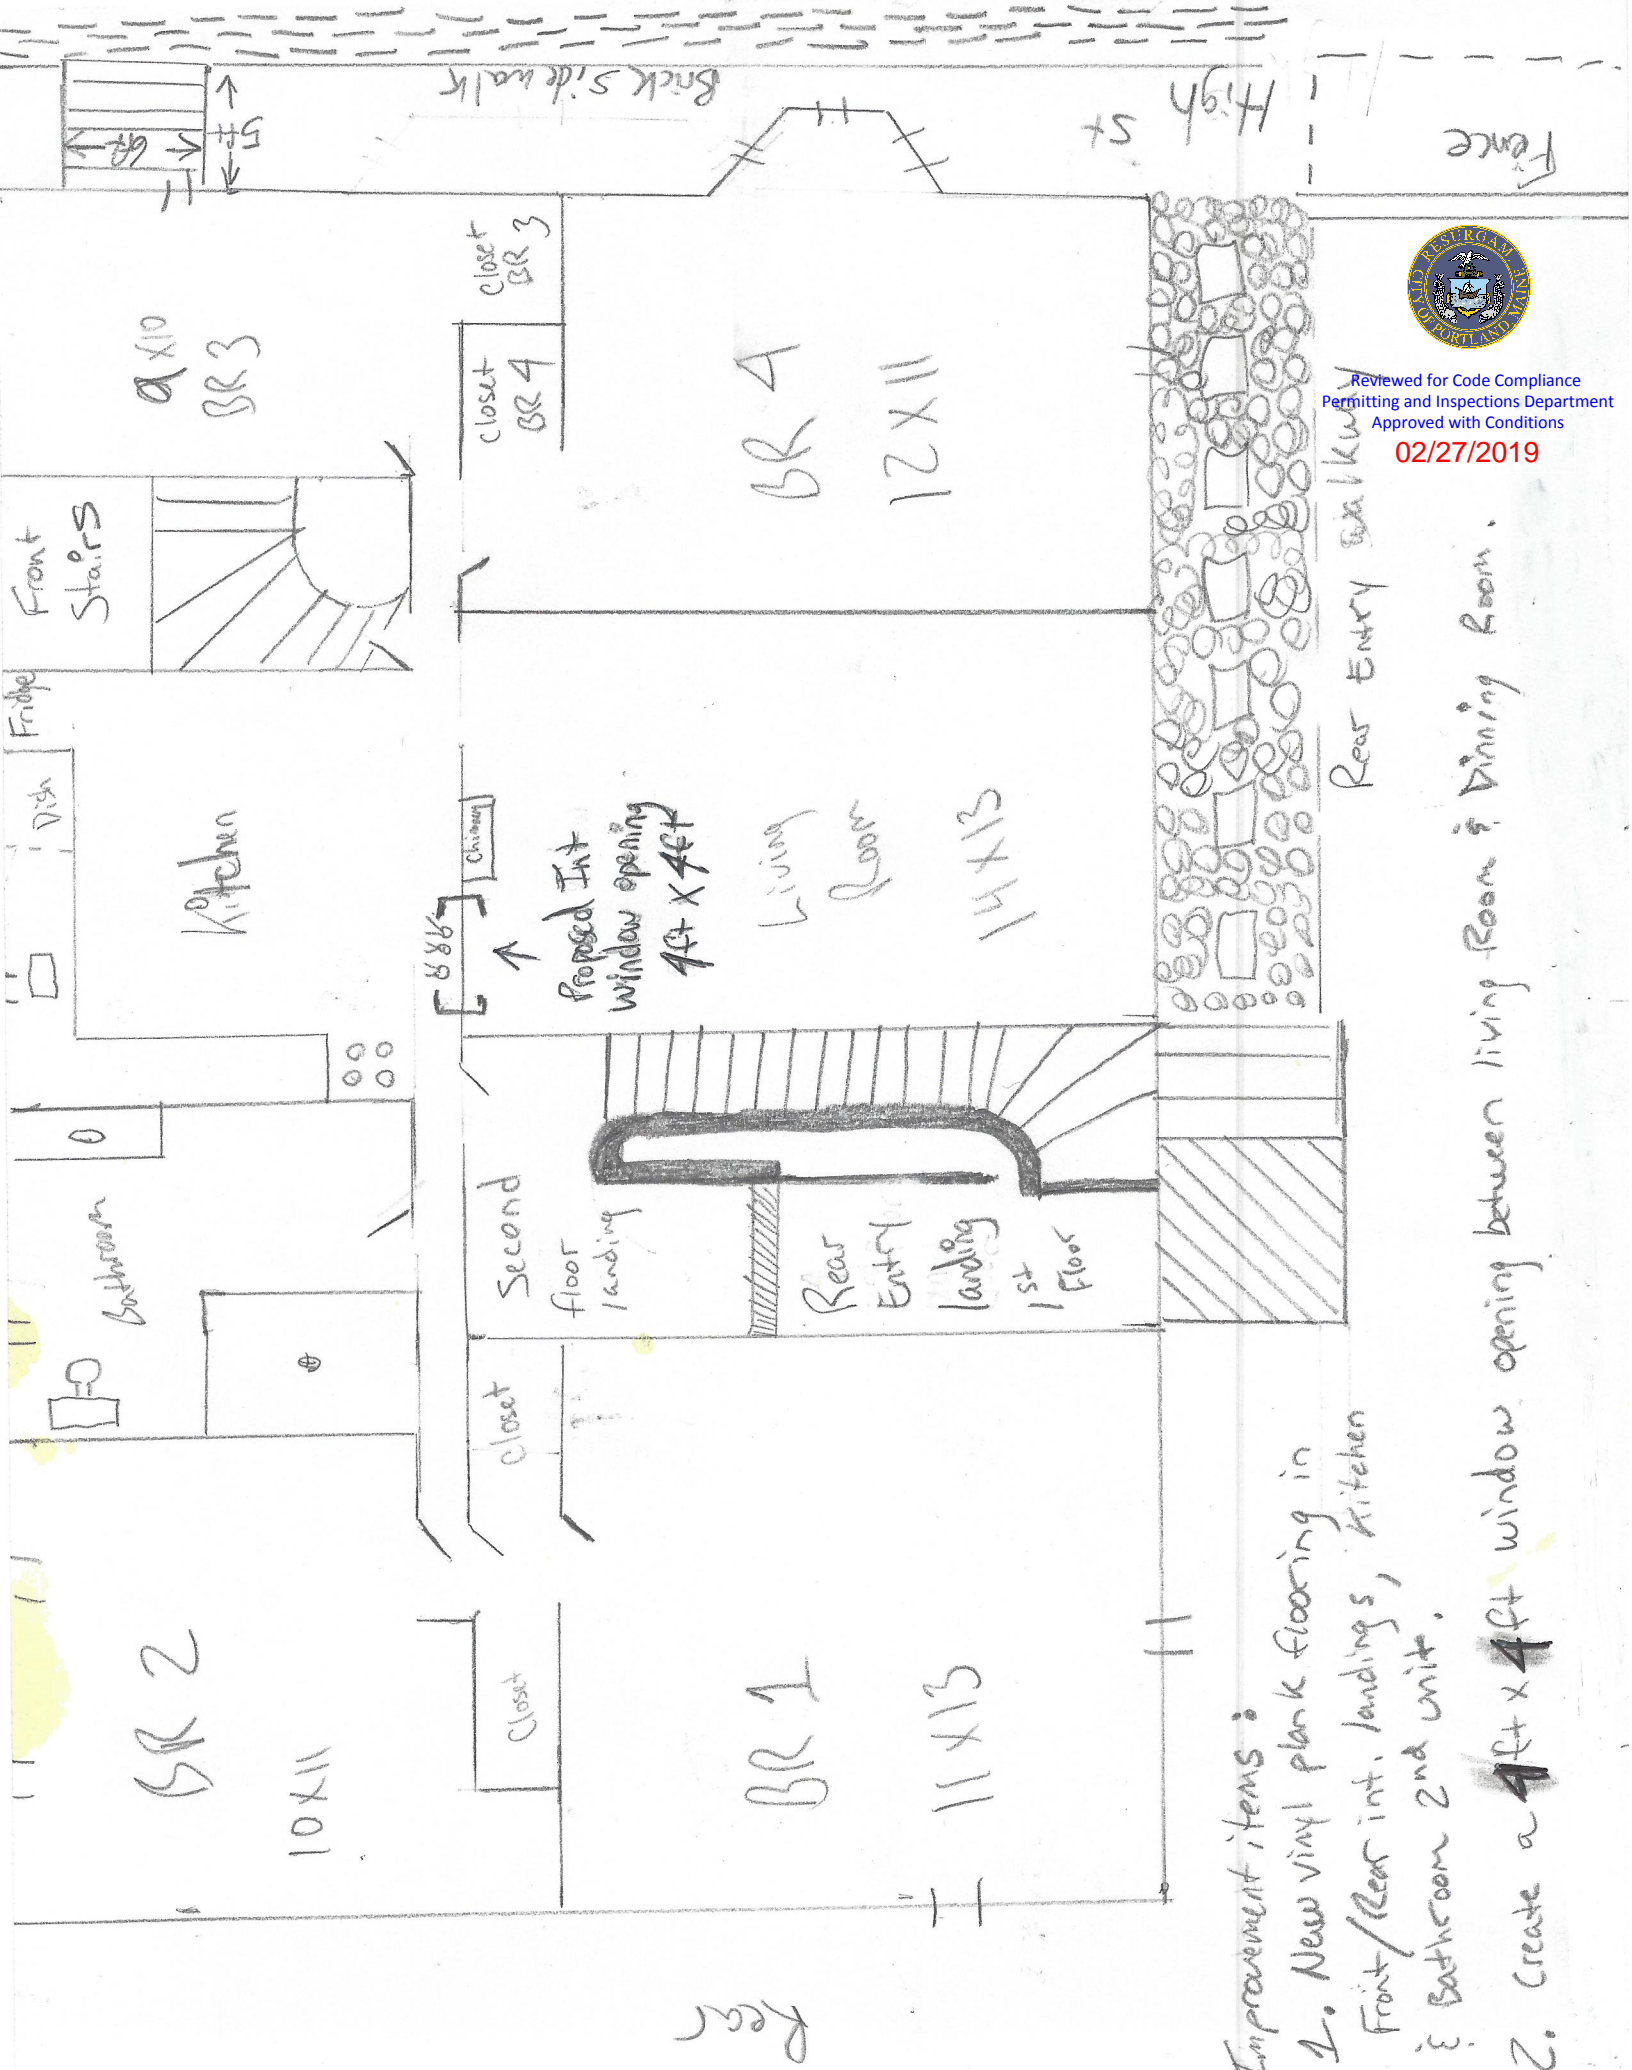

Reviewed for Code Compliance  
 Permitting and Inspections Department  
 Approved with Conditions

02/27/2019

- Improvement items:
1. New vinyl plank flooring in Front/Rear int. landings, kitchen & Bathroom 2nd unit.
  2. Create a 4ft x 4ft window opening between living room & dining room.

<b>Description:</b>	Engineered COREtec Pro Plus Floating Floor with Attached Cork Underlayment
<b>Warranty:</b>	Lifetime Limited Residential Wear Warranty Lifetime Limited Structural Warranty Lifetime Limited Waterproof Warranty 15 Year Limited Commercial Wear Warranty
<b>Installation:</b>	Float, Glue Down
<b>Size/Packaging:</b>	7.20" x 48.03" x 5 mm Planks 28.84 sq. ft./carton, 12 planks per carton, 51 lbs. per carton, 50 ctns per pallet
<b>Density:</b>	2000 kg/m3
<b>Pattern Repeat:</b>	5 planks
<b>Construction:</b>	0.5 mm/20 mil wear surface 1.0 mm vinyl base layer 1.5 mm core 1.0 mm vinyl balance layer 1.0 mm cork underlayment
<b>Edges/Ends:</b>	Micro Bevel
<b>Wear Finish:</b>	UV-cured acrylic
<b>Gloss Level:</b>	8% - 10%



Reviewed for Code Compliance  
 Permitting and Inspections Department  
 Approved with Conditions

02/27/2019

**TEST DATA**

<b>ASTM E492-09 Impact Sound Conduction</b>	IIC 57
<b>ASTM E90-09 Airborne Sound Conduction</b>	STC 50
<b>ASTM F-970-15 Static Load Limit:</b>	0.02 mm @ 1200 lbs
<b>ASTM F2199 Dimensional Stability:</b>	Pass
<b>ASTM F1914 Short-Term Indentation:</b>	0.5%
<b>ASTM-E648-15 Critical Radiant Flux:</b>	Meets or exceeds, Class 1
<b>ASTM-E662-17 Smoke Density:</b>	Pass, Flaming 330 Pass, Non-Flaming 322

<b>Certifications:</b>	GREENGUARD GOLD Certified
<b>Environmental Statement:</b>	USFloors' commitment is to provide consumers and specifiers with beautiful and durable floors at a good value, while minimizing our impact on the environment and enhancing and improving it whenever possible. USFloors is a member of the USGBC.
<b>Country of Origin:</b>	Manufactured in China