

UNIT 717-817 INTERIOR ELEVATIONS
1/2" = 1'-0"

REFLECTED CEILING PLAN NOTES 1.) G.C. TO COORDINATE LOCATIONS OF PLUMBING CLEAN OUTS WITH ACCESS PANELS AS SHOWN ON

REFLECTED CEILING PLANS

AND CONTROL JOINTS

BATHROOMS IN ALL UNITS

2.) G.C. TO PROVIDE ACCESS PANELS AS REQUIRED FOR ALL ELEMENTS (SPRINKLER, VALVES, ETC) NOT SHOWN ON THIS REFLECTED CEILING PLAN)

BLOCKING REQUIRED FOR ALL ACCESS PANELS

4.) ALL ACCESS PANELS TO BE FIRE RATED TO MATCH THE CEILING THEY ARE INSTALLED WITHIN

3.) G.C. TO PROVIDE METAL FRAMING AND

UNIT NOTES

.) CEILING HEIGHTS, WINDOW HEAD AND SILL HEIGHTS VARY FROM FLOOR TO FLOOR, INTERIOR ELEVATIONS GRAPHICALLY DEPICT ONE FLOOR ONLY, FOR HEIGHT INFORMATION REFER TO BUILDING SECTIONS AND WALL SECTIONS

2.) G.C. TO CONFRIM AND COORDINATE ALL ROUGH FRAMING DIMENSIONS FOR TUBS, SHOWERS, BUILT-IN FIXTURES ETC. G.C. TO CONFRIM AND COORDINATE ALL CABINETRY AND

APPLIANCES DIMENSIONS 3.) PROVIDE APPROPRIATE FIRE TREATED BLOCKING IN WALLS BEHIND ALL FIXTURES, PARTITIONS AND ACCESSORIES. BLOCKING FOR GRAB BARS TO BE PROVIDED IN WALLS OF

4.) PROVIDE MOISTURE RESISTANT GWB AT ALL WALLS AND CEILINGS IN BATHROOMS TYPICAL 5.) SET ALL CLOTHES WASHERS IN PANS WITH WATER SENSOR

6.) REFER TO ELECTRICAL AND MECHANICAL DRAWINGS FOR ADDITIONAL INFORMATION REGARDING, LIGHTING, DIFFUSERS,

7.) PROVIDE FIRE EXTINGUISHER ON BRACKET IN BASE CABINET BELOW KITCHEN SINK - TYPICAL 8.) HANG HOT WATER HEATER FROM DECK ABOVE. (SEE DETAIL ON TYPICAL UNIT DETAILS SHEET)

.) WHERE DROPPED SOFFITS AND CEILINGS ARE SHOWN, THESE ARE IN ADDITION TO THE FIRE RATED GWB CEILING ABOVE

0.) WHERE PLUMBING VALVES (TUB, SHOWER, ETC) ARE LOCATED IN FIRE RATED WALLS, PROVIDE FIRE RATED BOX IN WALL FOR VALVE TO BE INSTALLED WITHIN

CABINETRY AND APPLIANCE ABBREVIATIONS

WHICH IS PART OF THE RATED ASSEMBLY

DB = DRAWER BASE DRB = DOOR BASE

SB = SINK BASE WC = WALL CABINET

WC(24) = WALL CABINET 24" DEEP PU = PANTRY UNIT 24" DEEP

OS = OPEN SHELVES RA = RANGE


DW = DISHWASHER REF = REFRIGERATOR


REFLECTED CEILING PLAN AND LIGHTING LEGEND SYMBOL TAG DESCRIPTION

A SURFACE MOUNT - TBD B SURFACE MOUNTED - TBD SURFACE MOUNT - IN CLOSETS D SURFACE MOUNTED ON WALL ABOVE DOOR E WALL SCONCE IN BATHROOM OVER VANITY

F SURFACE MOUNT - WET LOCATION H SURFACE MOUNT CENTER IN BEDROOMS SURFACE MOUNT - WET LOCATION

CEILING GRILLE

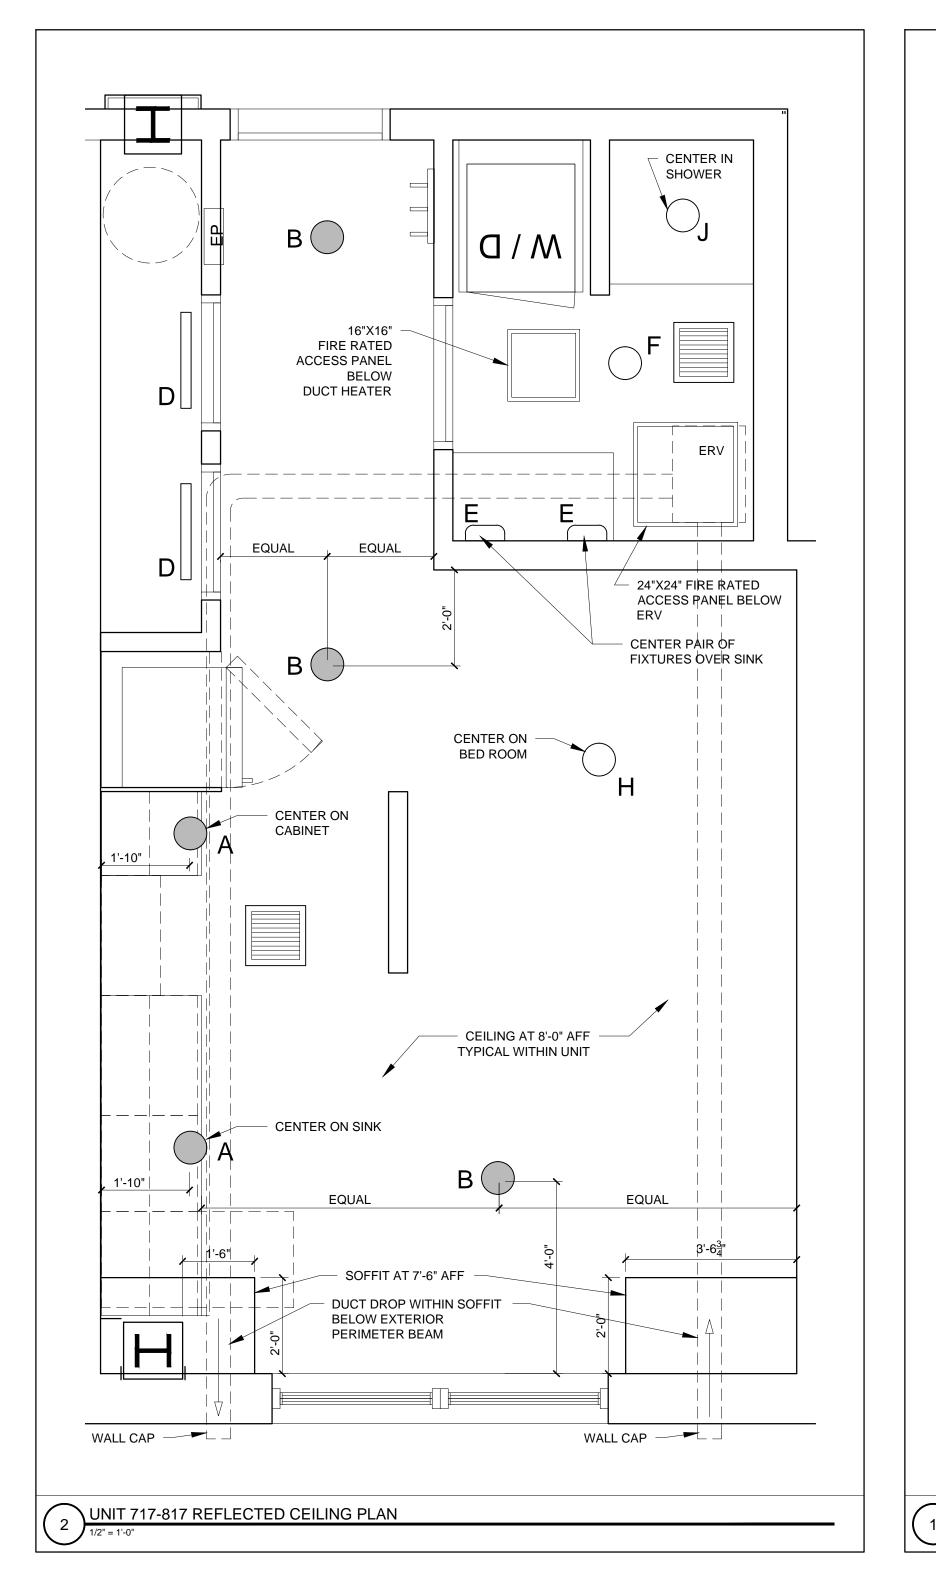

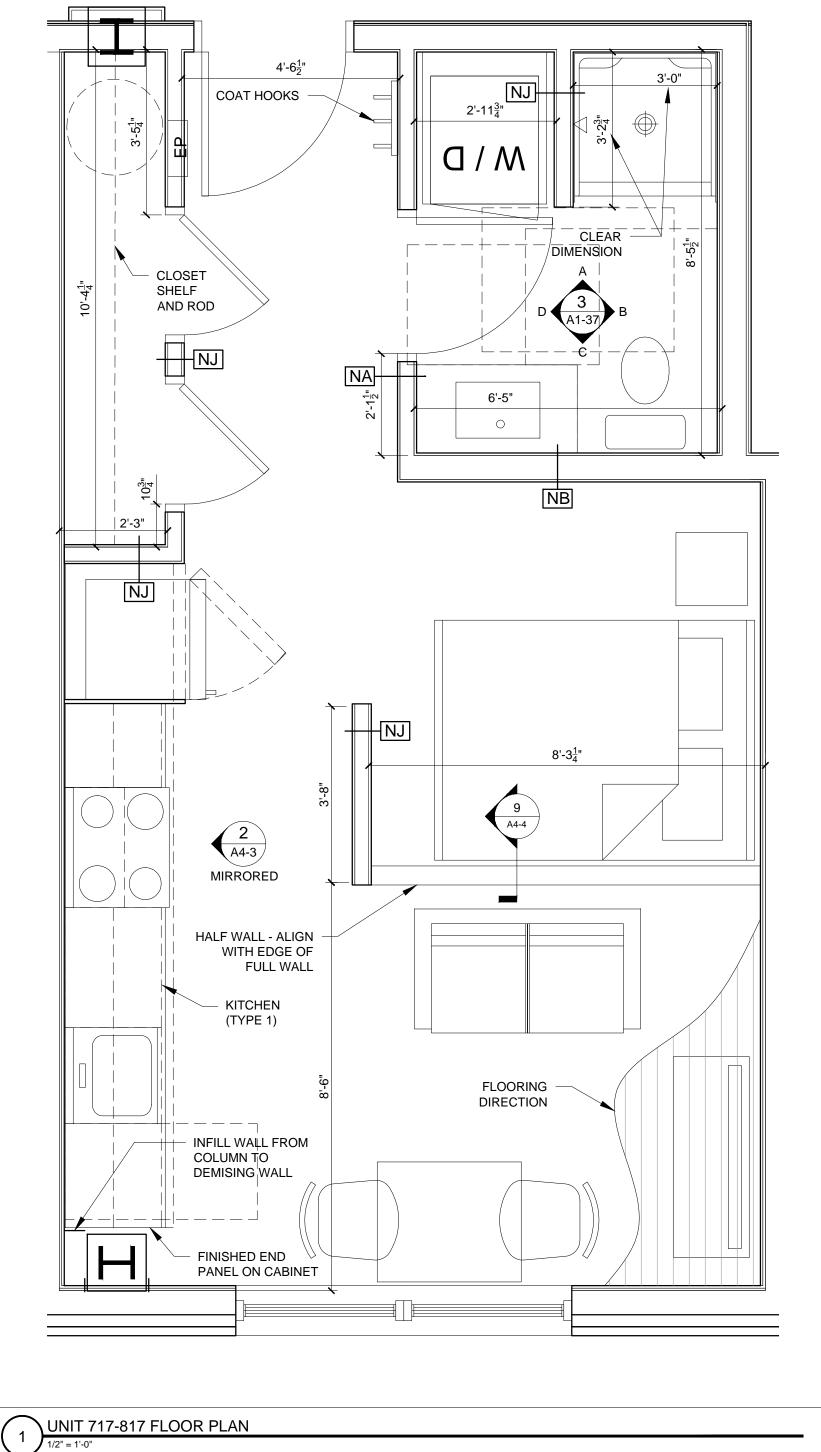

ARCHITECTURE

STREE^{-S}

9

RYAN SENATORE ARCHITECTURE 565 CONGRESS STREET PORTLAND, MAINE 04101 207-650-6414 senatorearchitecture.com

CONSULTANTS: STRUCTURAL: Structural Integrity 77 Oak Street Portland, ME 04101 207-774-4614

REVISIONS:

DATE: 2 NOVEMBER 20 PROJECT No.

DRAWN BY: RJS / RR CHECKED BY: SCALE: AS NOTED SHEET TITLE: UNIT 717-817 PLANS AND

INTERIOR **ELEVATIONS**