9

RYAN SENATORE ARCHITECTURE 565 CONGRESS STREET PORTLAND, MAINE 04101 207-650-6414 senatorearchitecture.com

CONSULTANTS:

STRUCTURAL: Structural Integrity 77 Oak Street Portland, ME 04101 207-774-4614


1 REVISION #1 - 05/17/16 DATE: FEBRURAY 15, 201


**REVISIONS:** 


PROJECT No. DRAWN BY: RJS / RR CHECKED BY: SCALE: AS NOTED SHEET TITLE:

UNIT 209-809 PLANS AND

INTERIOR **ELEVATIONS** 

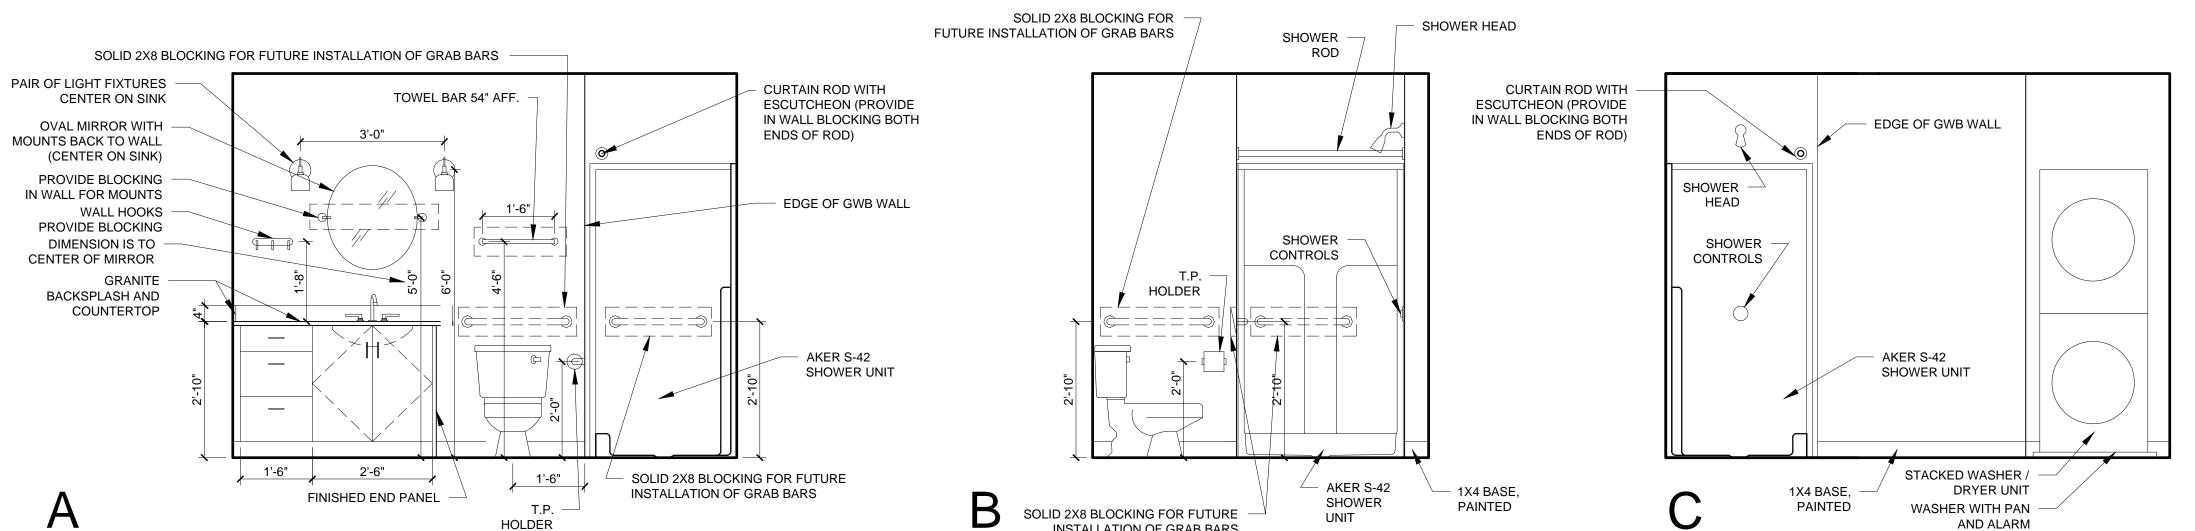

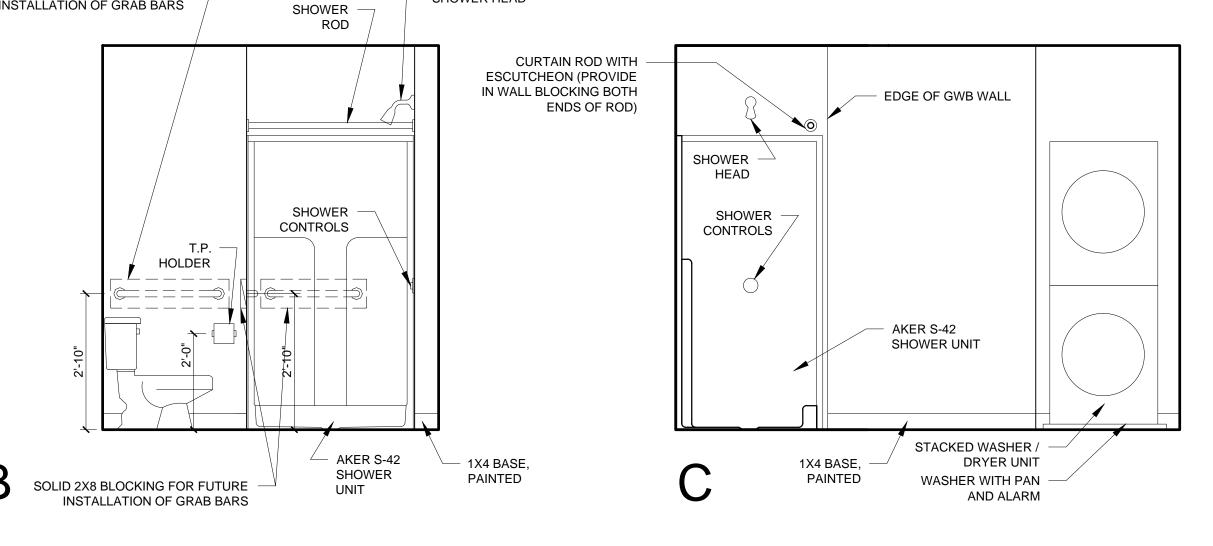

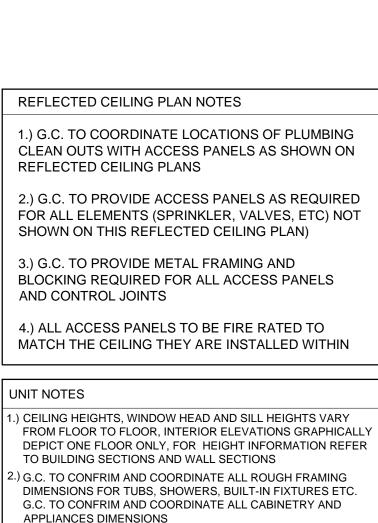

3 UNIT 209-809 INTERIOR ELEVATIONS

1/2" = 1'-0"

APPLIANCES DIMENSIONS 3.) PROVIDE APPROPRIATE FIRE TREATED BLOCKING IN WALLS BEHIND ALL FIXTURES, PARTITIONS AND ACCESSORIES. BLOCKING FOR GRAB BARS TO BE PROVIDED IN WALLS OF BATHROOMS IN ALL UNITS 4.) PROVIDE MOISTURE RESISTANT GWB AT ALL WALLS AND CEILINGS IN BATHROOMS TYPICAL 5.) SET ALL CLOTHES WASHERS IN PANS WITH WATER SENSOR 6.) REFER TO ELECTRICAL AND MECHANICAL DRAWINGS FOR ADDITIONAL INFORMATION REGARDING, LIGHTING, DIFFUSERS, 7.) PROVIDE FIRE EXTINGUISHER ON BRACKET IN BASE CABINET BELOW KITCHEN SINK - TYPICAL 8.) HANG HOT WATER HEATER FROM DECK ABOVE. (SEE DETAIL ON TYPICAL UNIT DETAILS SHEET) 9.) WHERE DROPPED SOFFITS AND CEILINGS ARE SHOWN, THESE ARE IN ADDITION TO THE FIRE RATED GWB CEILING ABOVE WHICH IS PART OF THE RATED ASSEMBLY 0.) WHERE PLUMBING VALVES (TUB, SHOWER, ETC) ARE LOCATED IN FIRE RATED WALLS, PROVIDE FIRE RATED BOX IN WALL FOR VALVE TO BE INSTALLED WITHIN

CABINETRY AND APPLIANCE ABBREVIATIONS


DB = DRAWER BASE


WC = WALL CABINET

DRB = DOOR BASE SB = SINK BASE

WC(24) = WALL CABINET 24" DEEP PU = PANTRY UNIT 24" DEEP OS = OPEN SHELVES RA = RANGE DW = DISHWASHER REF = REFRIGERATOR REFLECTED CEILING PLAN AND LIGHTING LEGEND SYMBOL TAG DESCRIPTION A SURFACE MOUNT - TBD SURFACE MOUNTED - TBD SURFACE MOUNT - IN CLOSETS SURFACE MOUNTED ON WALL ABOVE DOOR E WALL SCONCE IN BATHROOM OVER VANITY SURFACE MOUNT - WET LOCATION H SURFACE MOUNT CENTER IN BEDROOMS SURFACE MOUNT - WET LOCATION J SURFACE MOUNT - WET LOCATION

K EXTERIOR CUT OFF DOWN LIGHT CEILING GRILLE

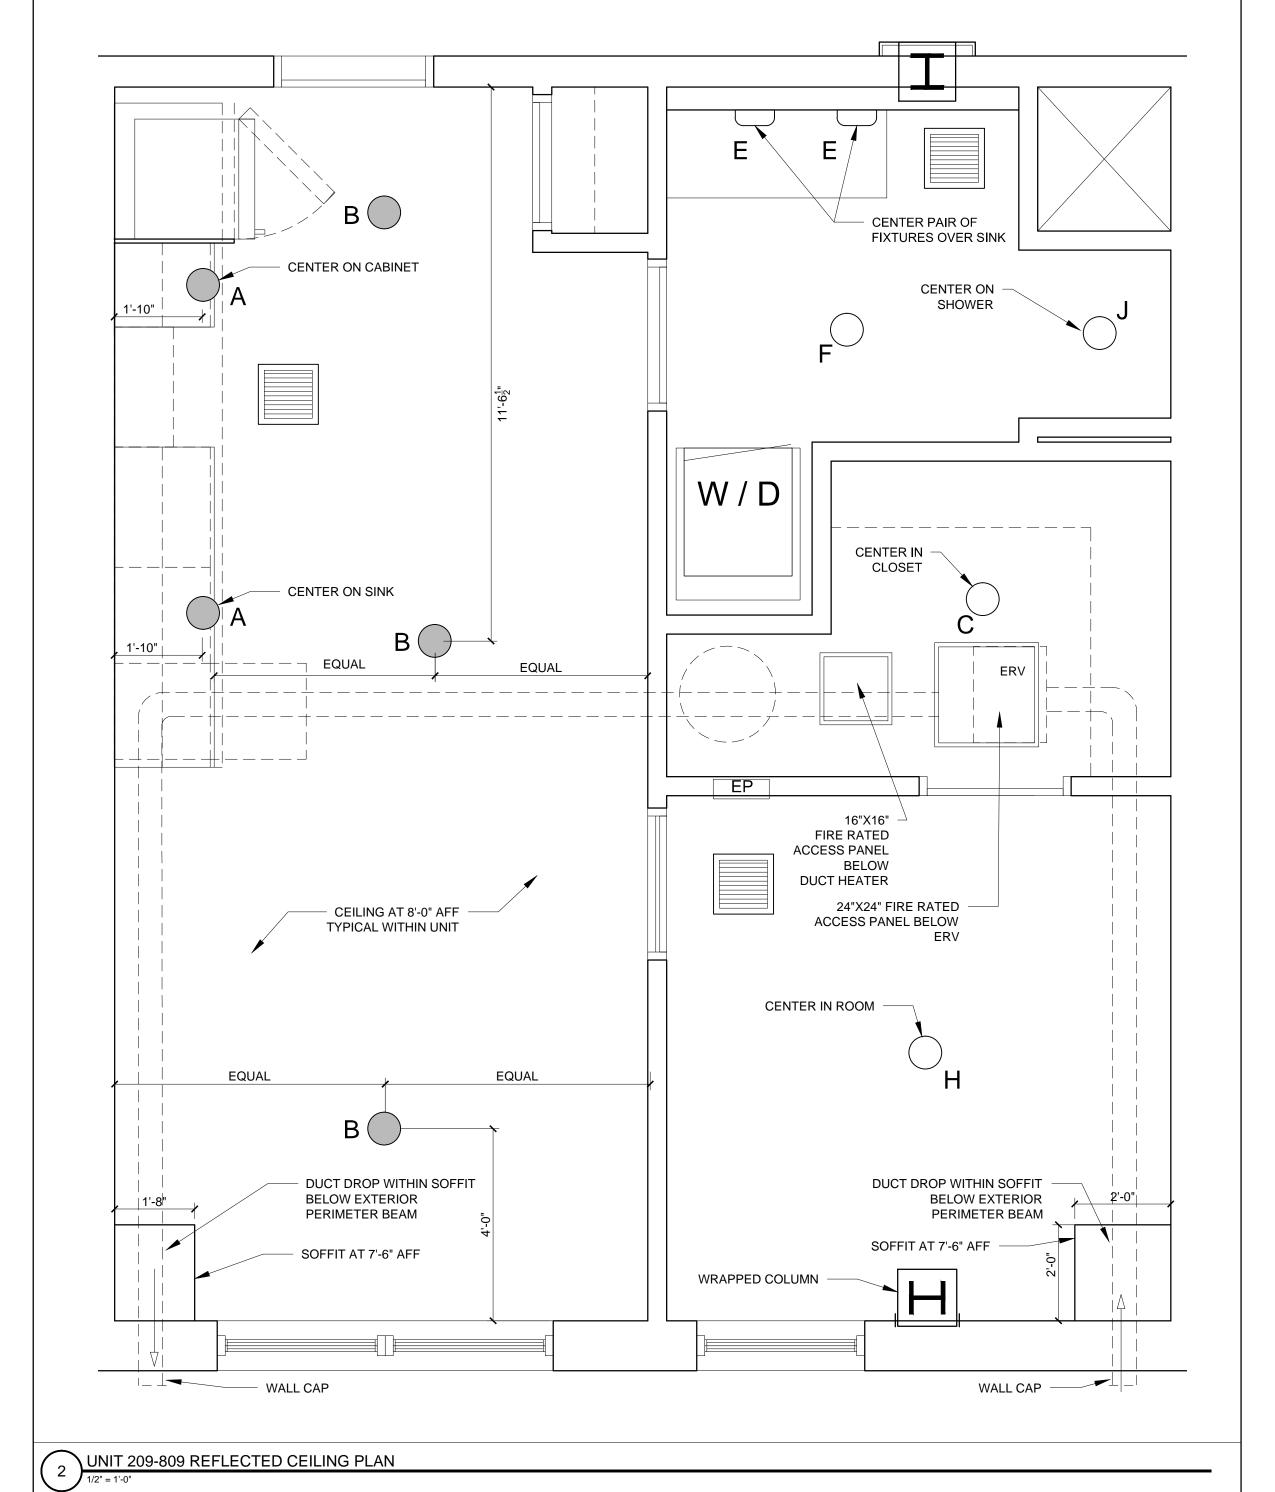

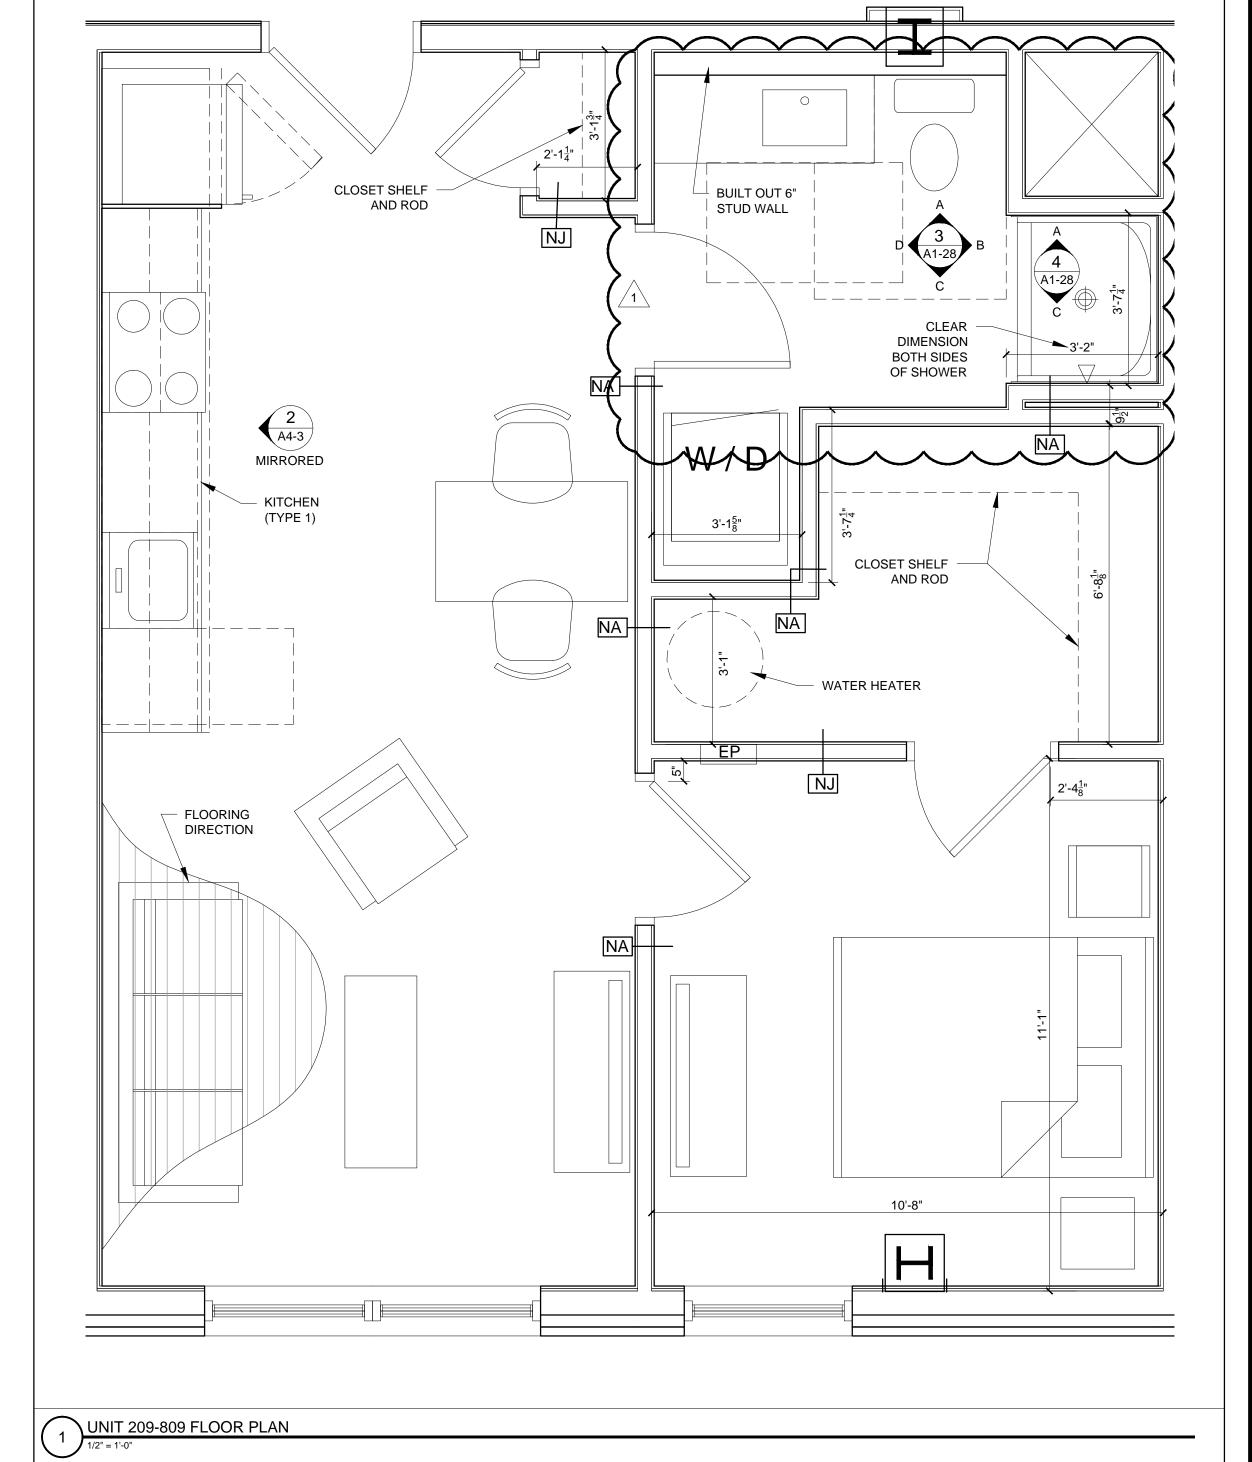

/ RECEPTACLE

BACKSPLASH

1X4 BASE, PAINTED

SIDE OF STACKED —

WASHER / DRYER UNIT

GRANITE

GRANITE

COUNTERTOP

VANITY BASE CABINET

1'-9"