EXISTING DOOR SCHEDULE

Level	DOOR No.	DOOR W	H	THCK	TYPE	MATL	FINISH	FRAME THRESHOLD	MATL	FINISH	TYPE	REMARKS
GROUND FLOOR - NEW												
GROUND FLOOR - NEW	X01	3'-3 1/2"	7'-0"	1 3/4"	7	WOOD/ GLASS	PTD	STONE	WOOD	PTD	F	EXISTING DAMAGED ENTRY DOOR TO BE REPLACED IN KIND
GROUND FLOOR - NEW	X02	2'-8"	6'-8"	1 1/2"	7	WOOD/ GLASS	PTD	WOOD	WOOD	PTD	F	EXISTING SWING DOOR WITH FROSTED GLASS TO BE SALVAGED AND REUSED AS DOOR U18
GROUND FLOOR - NEW	X03	2'-7"	6'-8"	1 3/8"	13	WOOD	PTD	WOOD	WOOD	PTD	I	EXISTING DOOR TO BE REMOVED
GROUND FLOOR - NEW	X04	2'-8"	6'-8"	1 1/2"	5	WOOD	PTD	WOOD	WOOD	PTD	I	EXISTING SWING DOOR TO BE SALVAGED AND REUSED AS DOOR U06
GROUND FLOOR - NEW	X05	2'-0"	6'-0"	3/4"	9	WOOD	PTD	WOOD	WOOD	PTD	I	EXISTING CLOSET DOOR TO BE REMOVED
GROUND FLOOR - NEW	X06	3'-10"	7'-10"	1 3/8"	14	WOOD	PTD	WOOD	WOOD	PTD	G	EXISTING SWING DOOR TO BE FIXED IN PLACE
GROUND FLOOR - NEW	X07	2'-0"	6'-8"	1 3/8"	19	WOOD	PTD	WOOD	WOOD	PTD	I	EXISTING DOOR TO BE REMOVED
GROUND FLOOR - NEW	X08	3'-4"	7'-0"	1 3/8"	9	WOOD	PTD	WOOD	WOOD	PTD	I	EXISTING DOOR TO BE REMOVED
GROUND FLOOR - NEW	X09	5'-0"	6'-8"	1 1/2"	9	WOOD	VARNISH	WOOD	WOOD	VARNISH	I	EXISTING HOLLOW CORE POCKET DOORS TO BE REMOVED. TRIM TO REMAIN
GROUND FLOOR - NEW	X10	5'-0"	7'-0"	1 3/4"	10	WOOD	PTD	WOOD	WOOD	PTD	I	EXISTING DOUBLE DOORS TO BE REMOVED
GROUND FLOOR - NEW	X11	2'-8"	6'-8"	1 1/2"	5	WOOD	PTD	WOOD	WOOD	PTD	I	EXISTING CLOSET DOOR TO BE REMOVED
GROUND FLOOR - NEW	X12	3'-6"	6'-8"	1 3/4"	9	METAL	PTD	METAL	METAL	PTD	I	EXISTING EXTERIOR DOOR TO BE REMOVED
GROUND FLOOR - NEW	X13	3'-0"	7'-0"	1 3/4"	5	METAL	PTD	METAL	METAL	PTD	I	EXISTING EXTERIOR DOOR TO BE REMOVED
GROUND FLOOR - NEW	X14	3'-0"	7'-0"	1 3/8"	5	WOOD	PTD	WOOD	WOOD	PTD	I	EXISTING DAMAGED DOOR TO BE REPLACED
1ST FLOOR - NEW												
1ST FLOOR - NEW	X15	3'-0"	7'-0"	1 3/4"	5	METAL	PTD	WOOD	WOOD	PTD	I	EXISTING EXTERIOR DOOR TO BE REMOVED AND REPLACED
1ST FLOOR - NEW	X16	3'-0"	6'-8"	1 3/8"	18	METAL/GLASS	PREFINISHED	ALUMINUM	ALUMINUM	PREFINISHED	J	EXISTING DOOR TO BE REMOVED
1ST FLOOR - NEW	X17	3'-0"	6'-8"	1 3/8"	22	WOOD/GLASS	PTD	WOOD	WOOD	PTD	I	EXISTING ENTRY DOOR TO BE REMOVED AND REPLACED
1ST FLOOR - NEW	X18	3'-0"	7'-5"	1 1/4"	16	WOOD/GLASS	PTD	WOOD	WOOD	PTD	G	EXISTING DOOR WITH TRANSOM TO BE FIXED IN PLACE
1ST FLOOR - NEW	X19	2'-6"	7'-6"	1 1/2"	5	WOOD	PTD	WOOD	WOOD	PTD	G	EXISTING SWING DOOR TO BE SALVAGED AND REUSED AS DOOR U21
1ST FLOOR - NEW	X20	2'-8 1/2"	6'-10"	1 3/8"	9	WOOD/ GLASS	VARNISH	WOOD	WOOD	VARNISH	G	EXISTING HOLLOW CORE POCKET DOOR TO BE REMOVED
1ST FLOOR - NEW	X21	3'-10"	6'-10 1/2"	1 1/2"	9	WOOD	VARNISH	WOOD	WOOD	VARNISH	G	EXISTING HOLLOW CORE POCKET DOOR TO BE REPLACED
1ST FLOOR - NEW	X22	5'-8"	6'-10 1/2"	1 1/2"	9	WOOD	VARNISH	WOOD	WOOD	VARNISH	D	EXISTING HOLLOW CORE POCKET DOOR TO BE REMOVED WITH TRIM TO REMAIN
1ST FLOOR - NEW	X23	2'-6"	7'-0"	1 3/4"	9	WOOD	VARNISH	WOOD	WOOD	VARNISH	E	EXISTING HOLLOW CORE DOOR TO BE REMOVED
1ST FLOOR - NEW	X24	4'-10"	6'-9"	1 3/4"	20	WOOD/ GLASS	VARNISH	WOOD	WOOD	VARNISH	E	EXISTING DOUBLE SWING DOOR TO BE REMOVED WITH TRIM TO REMAIN
1ST FLOOR - NEW	X25	3'-0"	7'-0"	1 3/8"	6	METAL	PTD	METAL	WOOD	VARNISH	E	EXISTING ELEVATOR DOOR AND TRIM TO BE REMOVED
1ST FLOOR - NEW	X26	3'-0"	6'-0"	1 1/2"	17	METAL	PTD	METAL	WOOD	VARNISH	D	EXISTING ELEVATOR DOOR TO BE REPLACED AND FIXED IN PLACE. TRIM TO REMAIN
1ST FLOOR - NEW	X27	2'-6"	8'-0"	1 3/4"	9	WOOD	VARNISH	WOOD	WOOD	VARNISH	B	EXISTING DOOR TO BE REMOVED AND SALVAGED
1ST FLOOR - NEW	X28	2'-6"	6'-8"	1 3/8"	21	WOOD	VARNISH	WOOD	WOOD	VARNISH	G	EXISTING BIFOLD DOOR TO BE REMOVED
1ST FLOOR - NEW	X29	2'-10"	7'-0"	1 1/2"	5	WOOD	VARNISH	WOOD	WOOD	VARNISH	G	EXISTING DOOR TO BE SALVAGED TO BE REUSED AS U19 AND REPLACED IN KIND WITH RATED DOOR
2ND FLOOR - NEW												
2ND FLOOR - NEW	X30	2'-6"	6'-8"	1 1/2"	5	WOOD	PTD	WOOD	WOOD	PTD	G	EXISTING SWING DOOR TO BE REMOVED
2ND FLOOR - NEW	X31	3'-0"	6'-8"	1 1/2"	5	WOOD	PTD	WOOD	WOOD	VARNISH	G	EXISTING SWING DOOR TO BE SALVAGED AND REUSED AS DOOR U20. REPLACED IN KIND WITH RATED DOOR
2ND FLOOR - NEW	X32	2'-10"	7'-8"	1 1/2"	5	WOOD	PTD	WOOD	WOOD	PTD	G	EXISTING DOOR TO BE FIXED IN PLACE ON CORRIDOR SIDE
2ND FLOOR - NEW	X33	3'-0"	6'-7"	1 3/4"	8	WOOD/ GLASS	PTD	WOOD	WOOD	PTD	G	EXISTING DOOR TO BE REMOVED
2ND FLOOR - NEW	X34	2'-8"	6'-8"	1 1/2"	5	WOOD	PTD	WOOD	WOOD	PTD	G	EXISTING SWING DOOR TO BE SALVAGED AND REUSED AS DOOR U22
2ND FLOOR - NEW	X35	2'-8"	6'-8"	1 1/2"	5	WOOD	PTD	WOOD	WOOD	PTD	G	EXISTING SWING DOOR TO BE SALVAGED AND REUSED AS DOOR U17
2ND FLOOR - NEW	X36	2'-8"	6'-8"	1 1/2"	5	WOOD	PTD	WOOD	WOOD	PTD	G	EXISTING SWING DOOR TO BE SALVAGED AND REUSED AS DOOR U07
2ND FLOOR - NEW	X37	2'-8"	7'-6"	1 1/2"	4	WOOD	VARNISH	WOOD	WOOD	VARNISH	B	EXISTING SWING DOOR TO BE SALVAGED AND REUSED AS DOOR U03
2ND FLOOR - NEW	X38	2'-6"	6'-8"	1 1/2"	5	WOOD	PTD	WOOD	WOOD	PTD	C	EXISTING DOOR TO BE FIXED IN PLACE ON UNIT SIDE
2ND FLOOR - NEW	X39	2'-8"	7'-6"	1 1/2"	4	WOOD	PTD	WOOD	WOOD	PTD	C	EXISTING DOOR TO BE FIXED IN PLACE ON UNIT SIDE
2ND FLOOR - NEW	X40	3'-0"	7'-0"	1 3/4"	5	METAL	PTD	METAL	WOOD	PTD	C	EXISTING ELEVATOR DOOR TO BE REMOVED AND REPLACED
2ND FLOOR - NEW	X41	3'-0"	7'-6"	1 1/2"	4	WOOD	VARNISH	WOOD	WOOD	VARNISH	B	EXISTING SWING DOOR TO REMAIN FIXED IN PLACE ON CORRIDOR SIDE
2ND FLOOR - NEW	X42	2'-6"	7'-6"	1 3/8"	4	WOOD	PTD	WOOD	WOOD	PTD	B	EXISTING DOOR TO BE FIXED IN PLACE
2ND FLOOR - NEW	X43	2'-8"	7'-6"	1 1/2"	4	WOOD	PTD	WOOD	WOOD	PTD	B	EXISTING DOOR TO BE FIXED IN PLACE
3RD FLOOR - NEW												
3RD FLOOR - NEW	X44	3'-0"	7'-0"	1 3/8"	6	METAL	PTD	METAL	WOOD	PTD	G	EXISTING ELEVATOR DOOR AND TRIM TO BE REMOVED
3RD FLOOR - NEW	X45	3'-0"	7'-0"	1 3/8"	6	METAL	PTD	METAL	WOOD	PTD	F	EXISTING ELEVATOR DOOR AND TRIM TO BE REMOVED
3RD FLOOR - NEW	X46	2'-8"	6'-8"	1 1/2"	5	WOOD	PTD	WOOD	WOOD	PTD	F	EXISTING SWING DOOR TO BE REMOVED

X - INDICATES DOOR TO BE MOVED FROM ORIGINAL LOCATION TO BE SALVAGED OR REMOVED. NEW LOCATION NOTED IN REMARKS ON A8.01
ALL REMOVED DOOR HARDWARE TO BE SALVAGED AND RETURNED TO OWNERS

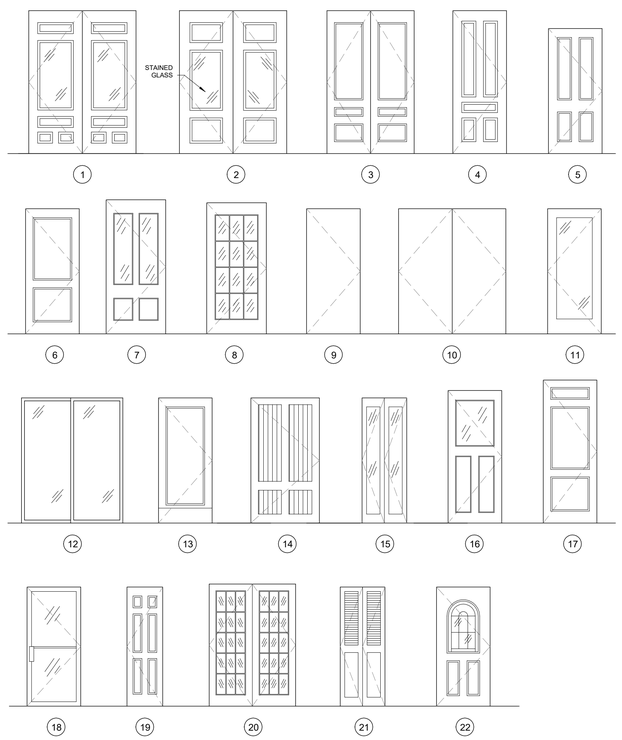

6 PROJECT LEAF TYPES
1/4" = 1'-0"

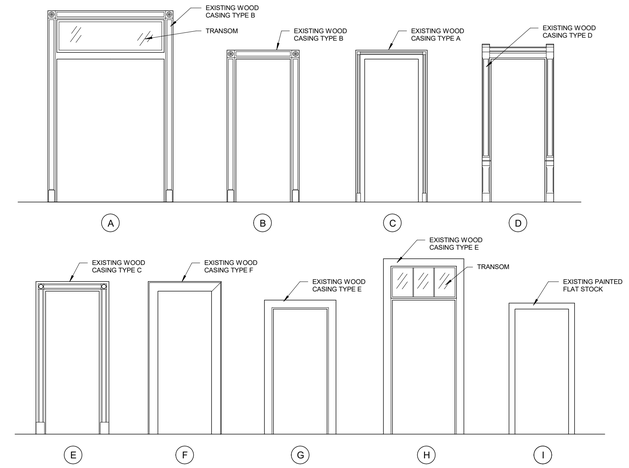

5 EXISTING FRAME TYPES
1/4" = 1'-0"

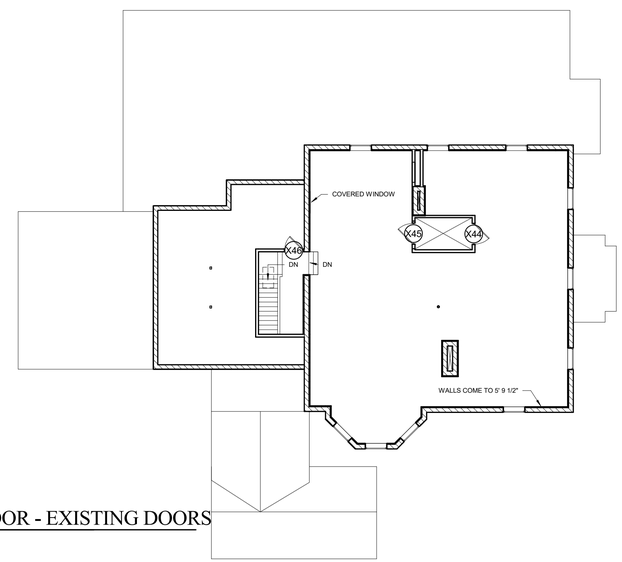

4 3RD FLOOR - EXISTING DOORS
3/32" = 1'-0"

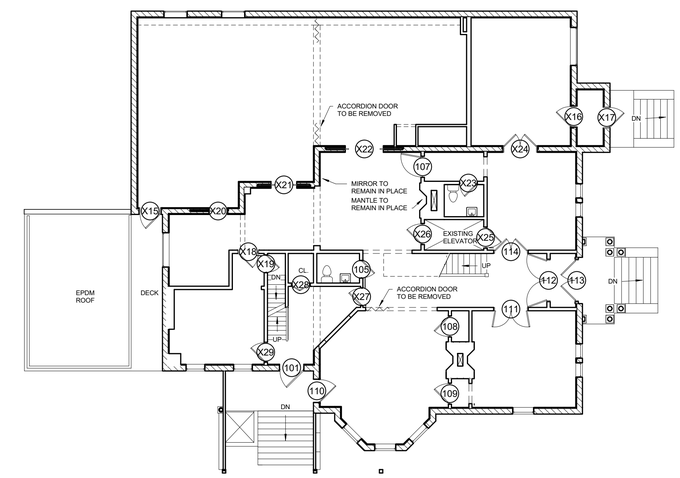

2 1ST FLOOR - EXISTING DOORS
3/32" = 1'-0"

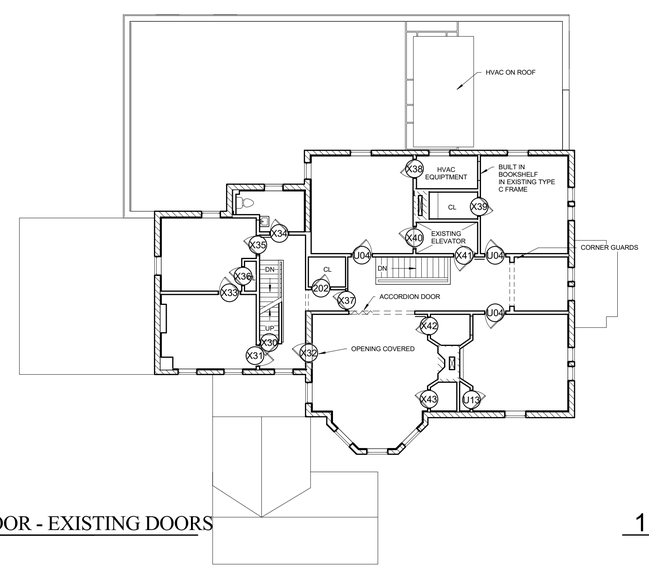

3 2ND FLOOR - EXISTING DOORS
3/32" = 1'-0"

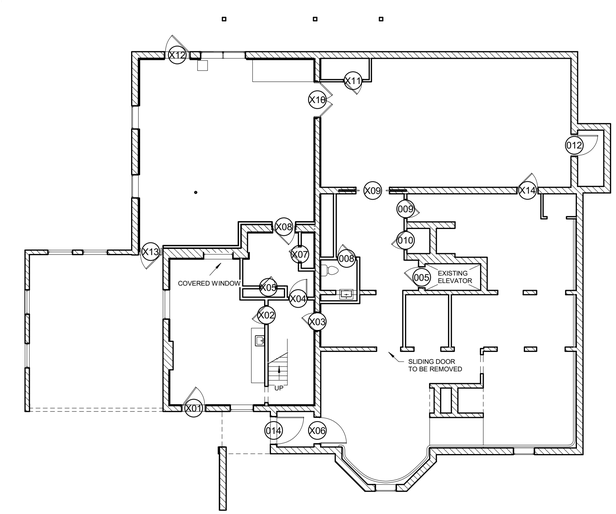

1 GROUND FLOOR - EXISTING DOORS
3/32" = 1'-0"

N

LICENSED ARCHITECT
DAVID LLOYD
NO. 936
STATE OF MAINE

Prepared For:
747 CONGRESS LLC

Consultant:

Architect:
ARCHETYPE architects
48 Union Wharf Portland, Maine 04101
(207) 772-6022 ARCHETYPE@ARCHETYPEPA.COM

Project:
THE FRANCIS
749 CONGRESS ST
PORTLAND, ME 04102

Revisions:

Scale: As indicated

Date: 03 AUG 2016

EXISTING DOOR SCHEDULE

A0.08