

A I.1A TYPICAL INTERIOR ROOM SIGN: DETAIL (I.1B EXTERIOR & OPPOSITE HAND SIM.)
SCALE: 1:1

B I.1A TYPICAL INTERIOR ROOM SIGN: SECTION (I.1B EXTERIOR & OPPOSITE HAND SIM.)
SCALE: 1:1



C I.1A, I.1B, I.2, I.3A, I.3B TYPICAL ELEVATION (OPPOSITE HAND SIM.)
SCALE: 3/4" = 1'-0"

SHEET NOTES

- Counter Sunk Screw: Where visible, paint to match adjacent surfaces
- Sign Body: MF1
- Internal Armature: As necessary to prevent oil-canning, type determined by fabricator
- Fluorescent Tube or LED
- Ballasts (or equivalent) for Fluorescent Tube or LED
- Sign Frame: MF1, aluminum armature
- Mechanical Fastener: As necessary, steel type determined by fabricator
- Wallpanel by G.C.: Provide blocking as necessary
- Sign Panel: 4 mil. Dibond composite material, matte white paintable surfaces, from www.alcancompositeusa.com
- Braille Beads: ADA compliant, match background color
- Metal Stud: Mounted to back of Sign Body for installation
- Fixed Sign Body
- Moveable Sign Window
- Fixed Sign Backer: Brake-formed aluminum
- Sign Support: MF2, steel square pipe
- Weld: 5/16" on all connecting edges, paint to match adjacent surfaces
- VHB Foam Tape
- Acetate Insert: Sign fabricator to supply first round of inserts and word processing templates for creating new inserts
- Raised Lettering and/or Symbol: ADA compliant, match P1
- Concealed Blocking: by G.C.
- Sign Frame: MF1, P4, Mechanically fastened to the wall with concealed, anti-corrosive fasteners
- Internally illuminated Sign Face: AC1 with V2 on 2nd surface. Removable for light fixture maintenance.
- Neon or LED: White
- Weep Holes
- Transformer: in weatherproof case, connect to remote switch (and photocell/digital timer if requested). Switch location TBD with owner.
- Halo lit ribbon letter: MF1, P3, Grind smooth all exposed welds. No visible fasteners/seams on front surface. Mechanically fastened to the wall with concealed, anti-corrosive fasteners.
- Mounting Rod: MF1, P 1, double bolted on each end. As minimum appearance as possible. Fabricator to coordinate with GC to install support prior to wall being finished.
- Rubber Gasket
- Text: Direct print to second surface of glass
- Solid Surfacing by G.C.

Portland International
Jetport
1001 Westbrook Street
Portland, Maine 04102

Gensler
2020 K Street, Northwest
Suite 200
Washington DC 20006
Telephone 202.721.5200
Facsimile 202.872.8587

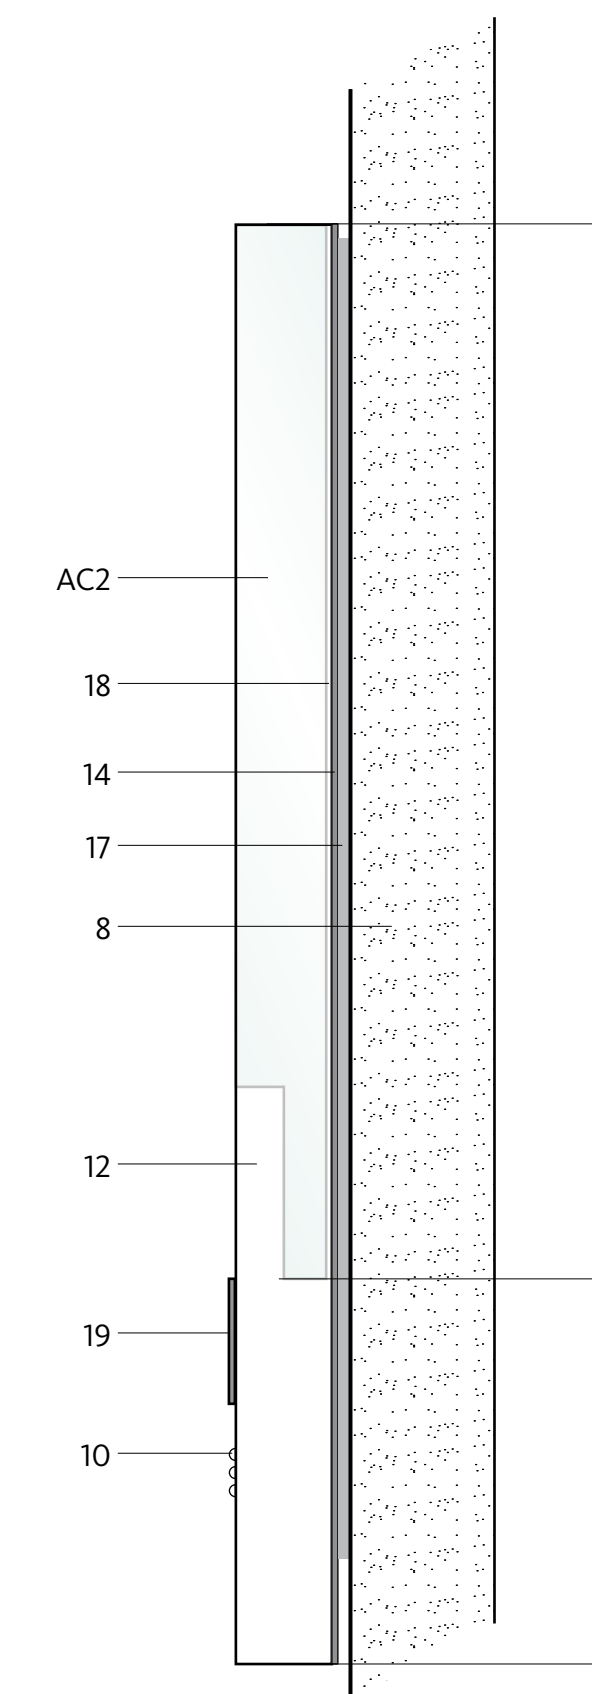
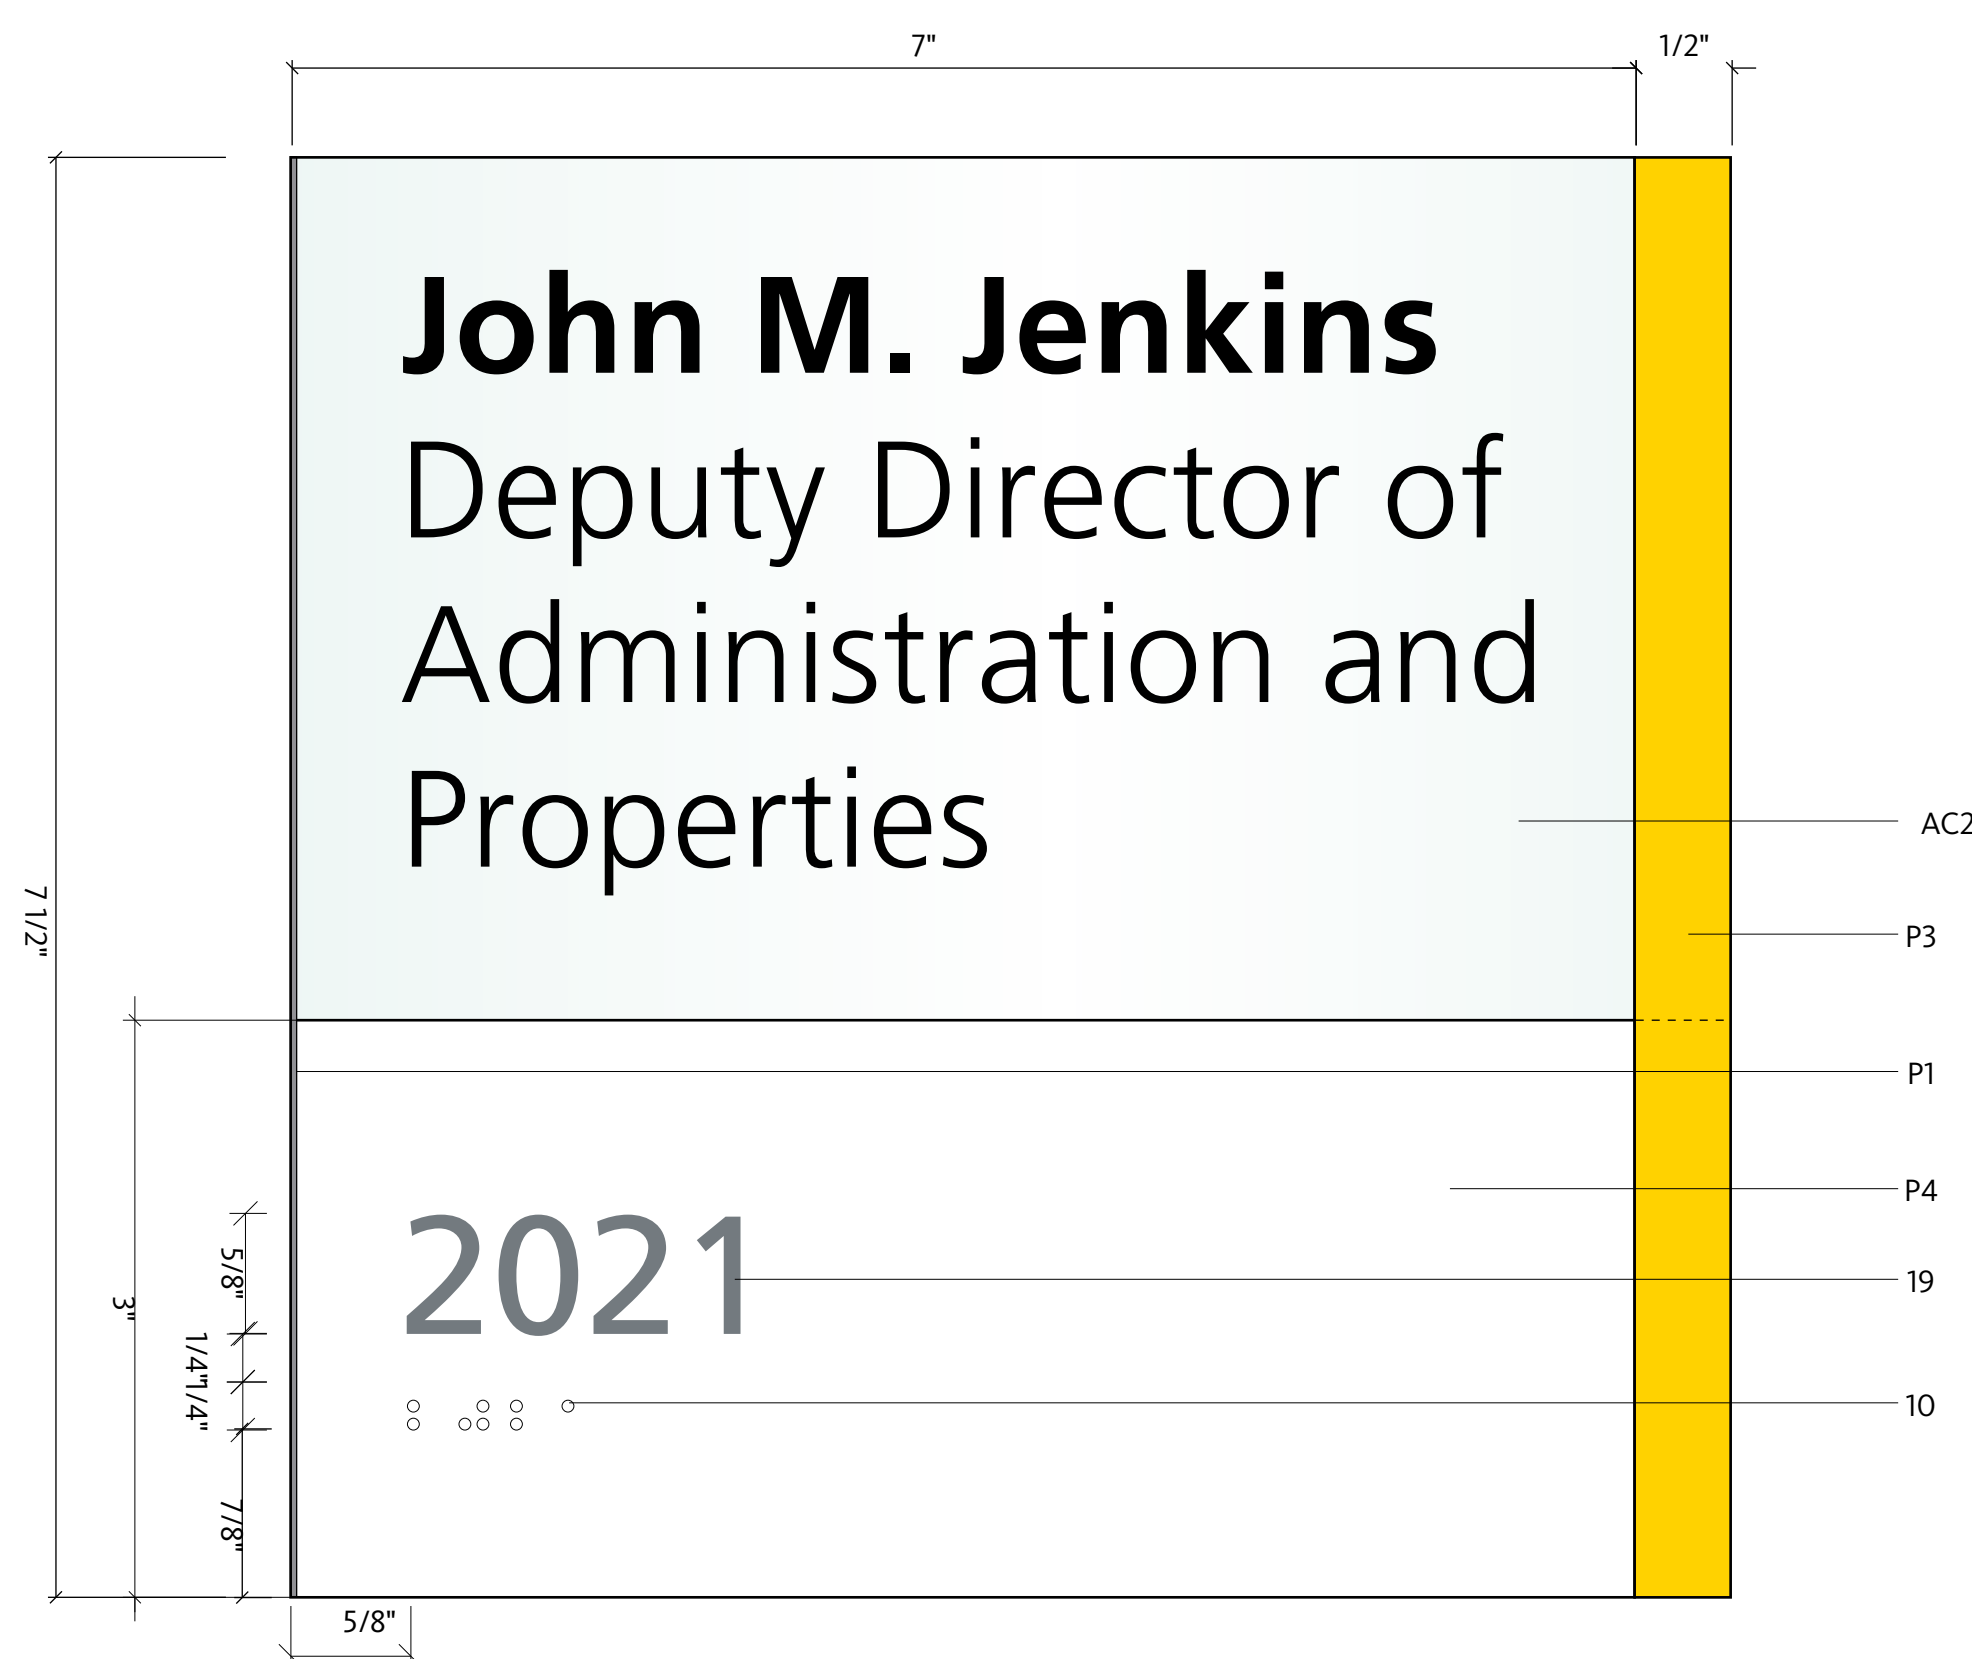


A I.2 TYPICAL OFFICE SIGN: DETAIL (OPPOSITE HAND SIM.)
SCALE: 1:1

B I.2 TYPICAL OFFICE SIGN: SECTION (OPPOSITE HAND SIM.)
SCALE: 1:1

C I.2 TYPICAL OFFICE SIGN: SECTION (OPPOSITE HAND SIM.)
SCALE: 1:1

2

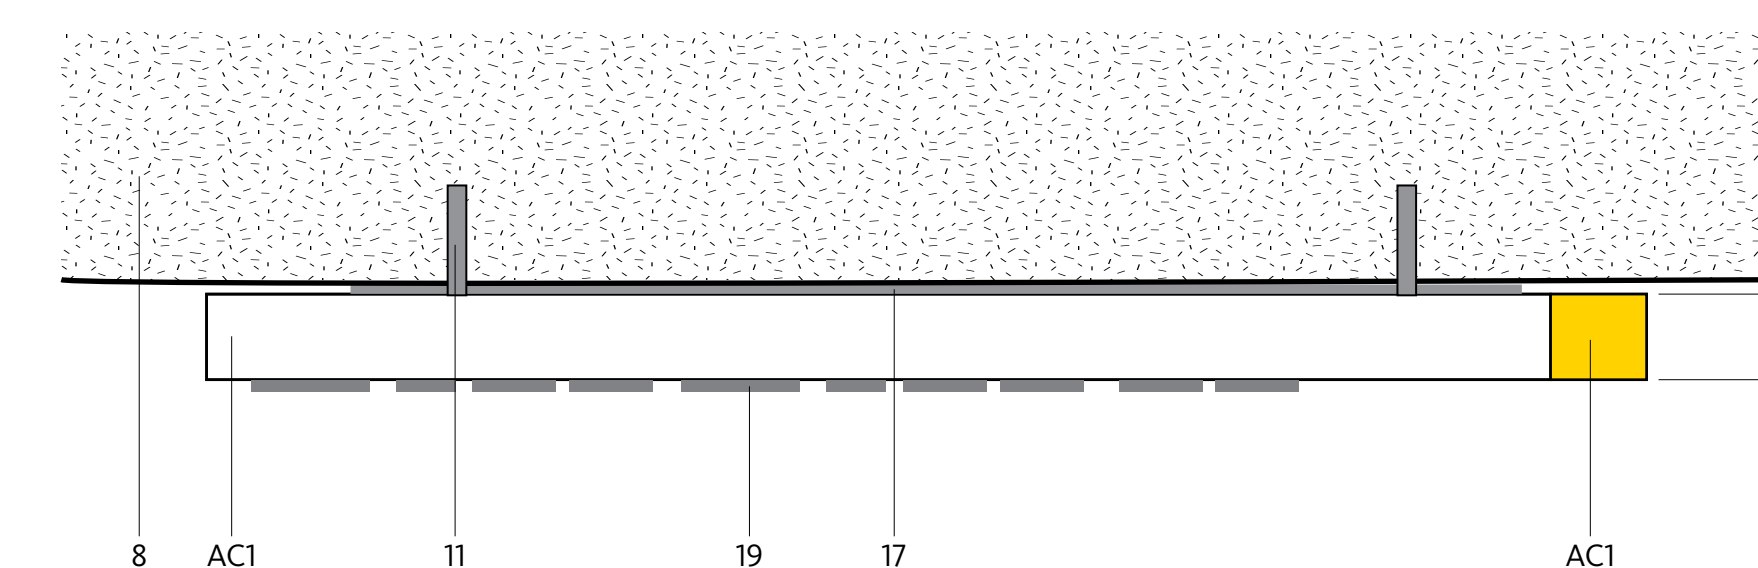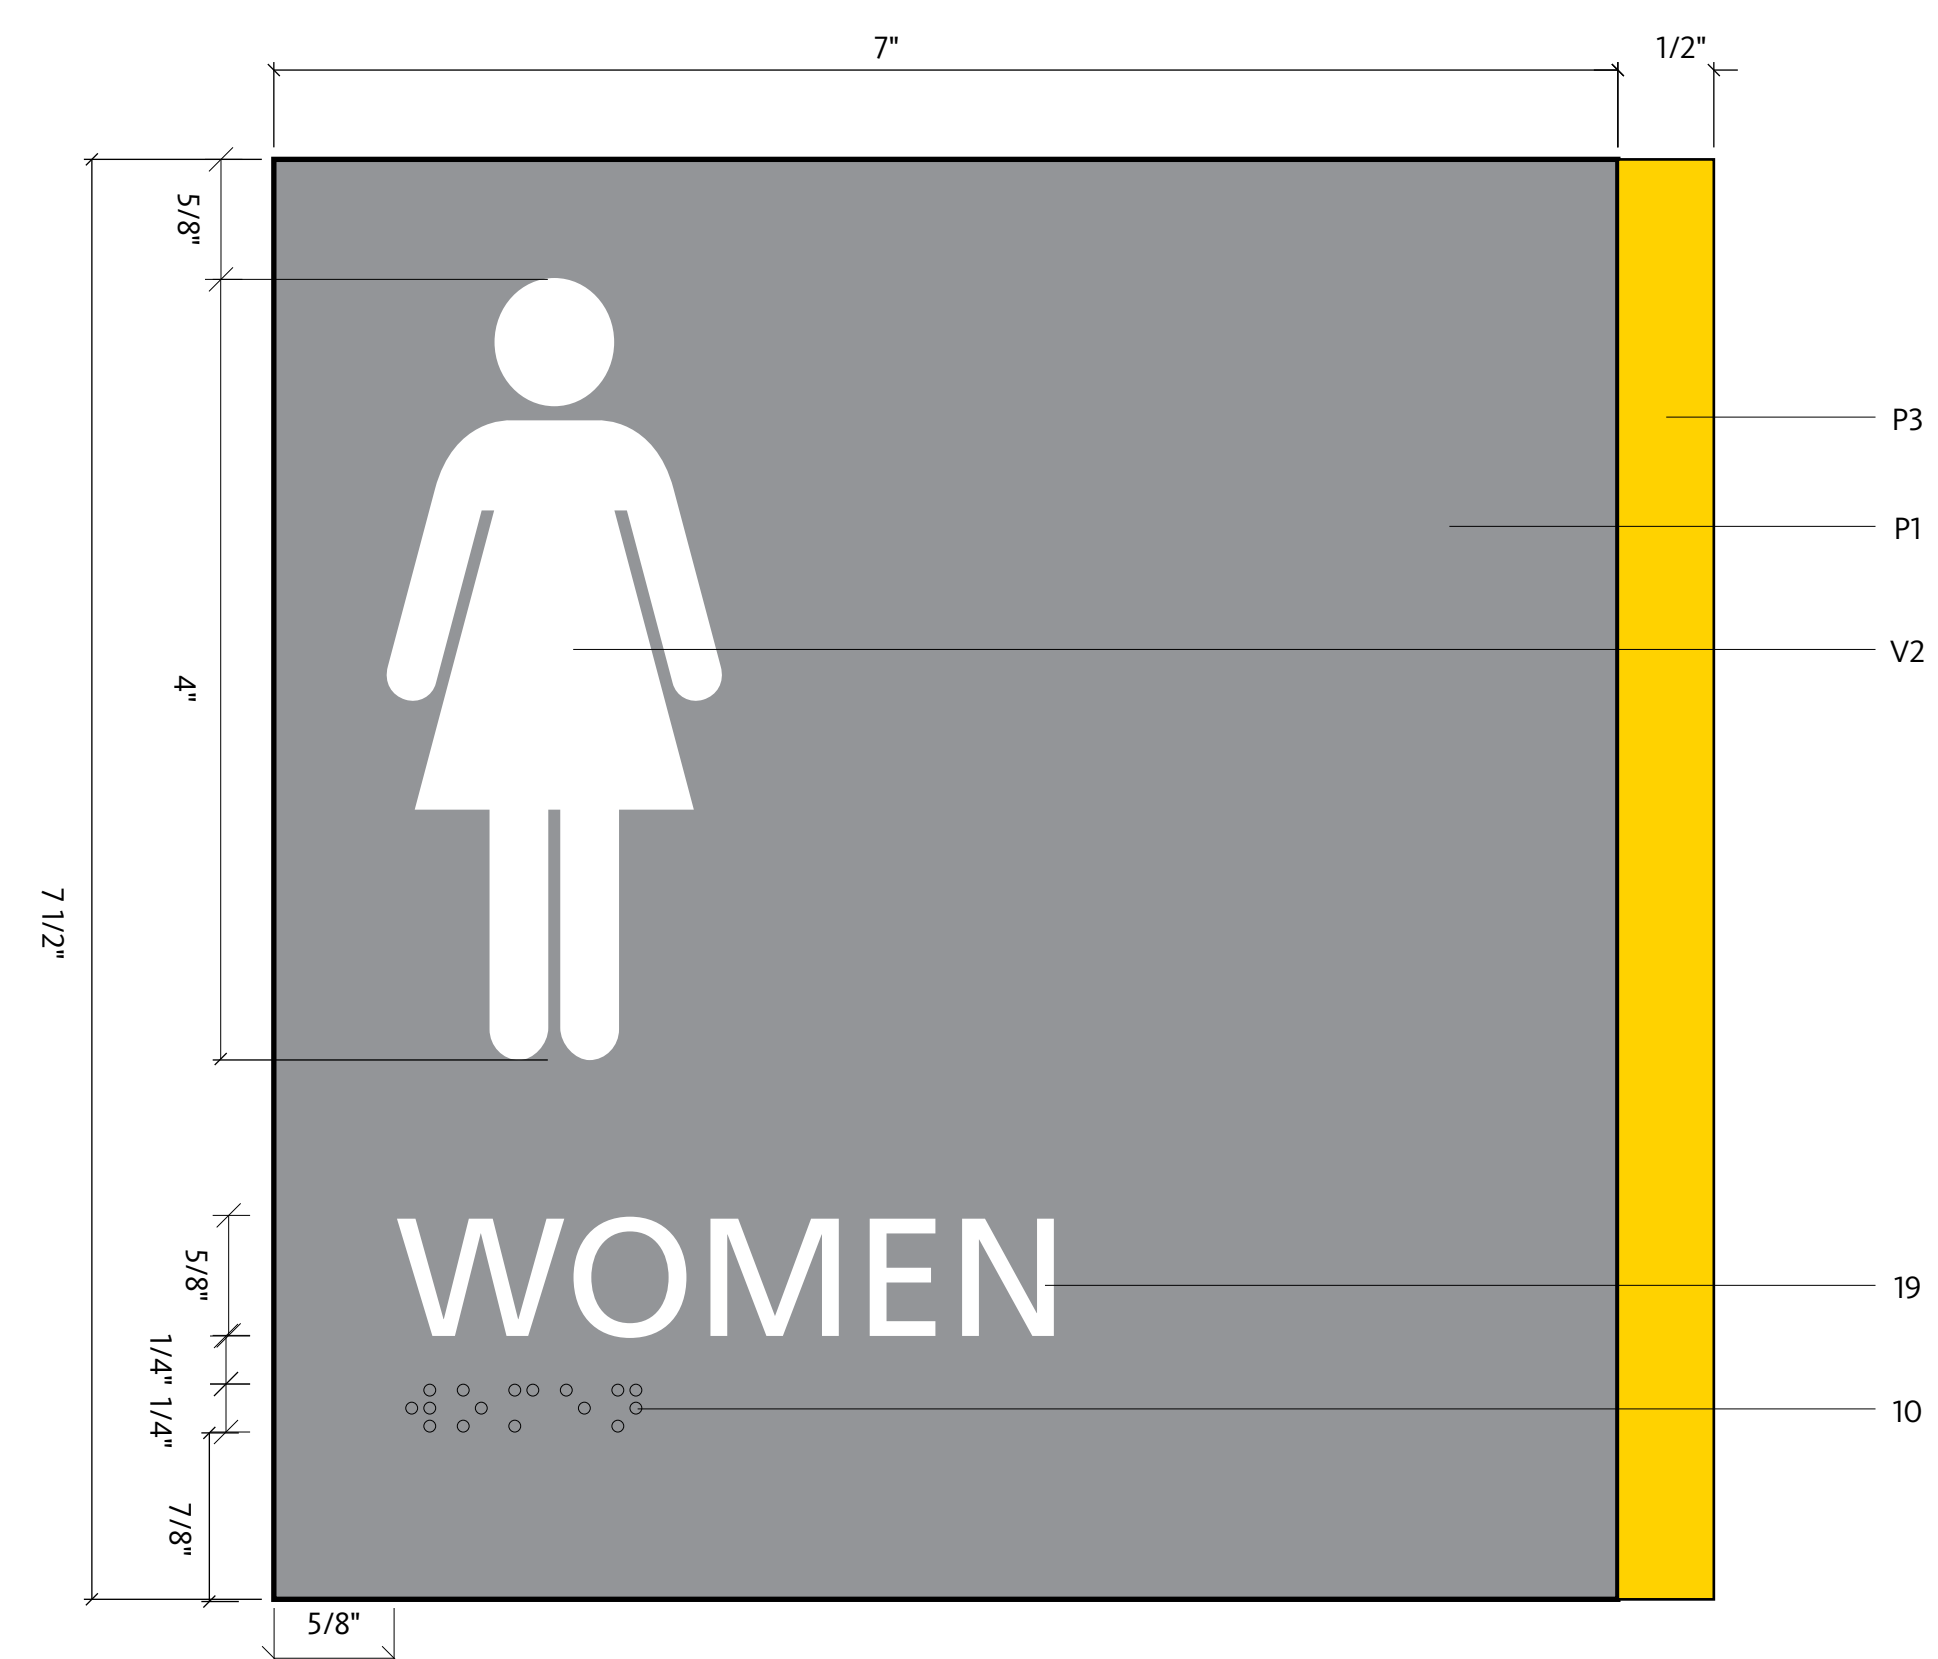

A I.3A TYPICAL SYMBOL SIGN: DETAIL (I.3B EXTERIOR & OPPOSITE HAND SIM.)
SCALE: 1:1

B I.3A TYPICAL SYMBOL SIGN: ADDITIONAL LAYOUTS
SCALE: 1:2

C I.3A TYPICAL SYMBOL SIGN: SECTION (I.3B EXTERIOR & OPPOSITE HAND SIM.)
SCALE: 1:2

GENERAL NOTES

Seal/Signature

Project Name
PWM Terminal Enhancement

Project Number
09 6395 000

Description
SIGNAGE & WAYFINDING: ELEVATIONS, SECTIONS, DETAILS

Scale
As Indicated

A07.12.05

© 2009 Gensler

Issue	Date & Issue Description	By	Check
01	01/23/09 95% CONSTRUCTION DOCUMENTS	BR	CK
02	10/26/09 ISSUED FOR PERMIT	BR/SH	MJ/TO