

**WORK KEY NOTES**


① CONTRACTOR SHALL VERIFY RECEPT AND TV JACK LOCATION AND ELEVATION PRIOR TO ROUGH-IN.

**WORK NOTES**

1. THE FOLLOWING SYSTEMS ARE BY OTHERS: CABLE TV, TELEPHONE, AND CAMERAS. CONTRACTOR SHALL COORDINATE WITH SYSTEMS PROVIDER.
2. ALL RECEPTACLES SHOWN MOUNTED ON EXTERIOR WALLS SHALL BE SURFACE MOUNTED. CONTRACTOR SHALL PROVIDE WIREMOLD TO FEED THESE DEVICES. COORDINATE WITH ARCHITECT AND OWNER PRIOR TO ROUGH-IN.
3. ALL RECEPTACLES SHOWN MOUNTED ON EXPOSED BRICK SHALL BE SURFACE MOUNTED. CONTRACTOR SHALL PROVIDE WIREMOLD TO FEED THESE DEVICES. COORDINATE WITH ARCHITECT AND OWNER PRIOR TO ROUGH-IN.

**GROUND FLOOR PLAN**

SCALE: 1/4" = 1'-0"

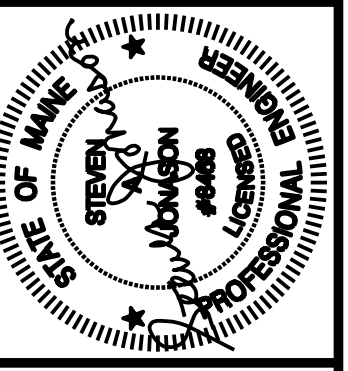

Prepared For:  
**747 CONGRESS LLC**



Consulting Engineer:

Architect:  
**ARCHETYPE architects**  
48 Union Wharf Portland, Maine 04101  
(207) 772-6022 Fax (207) 772-4056

Project:  
**FRANCIS INN**

749 CONGRESS ST  
PORTLAND, ME 04102

Revisions:  
4/06/17-FINAL REVISIONS

Date: 04/10/2017  
Scale: As Noted

**GROUND FLOOR  
POWER PLAN**

**E2.0**