

PLAN KEY NOTES

- 1 INFILL WALL TO EXTENTS REQUIRED WHERE DOOR HAS BEEN REMOVED; FLUSH WITH EXISTING WALL ON BOTH SIDES, MATCH EXISTING WALL CONSTRUCTION.
- 2 MECHANICAL GRILLS CENTERED IN GRID, RE:
- 3 RELOCATE DOORS AND STOREFRONT.
- 4 PROVIDE RUBBER TILE FLOORING TO MATCH

- 8 REMOVE ALL FASTENERS, BOXES OR OTHER ITEMS AND REPAIR CONCRETE FOR PAINT. PAINT
- 9 REFER TO ELECTRICAL FOR LIGHT FIXTURES. CENTER LIGHT FIXTURES IN RECESS TO MATCH
- 10 REINSTALL CEILING AS SHOWN OR PROVIDE MATCHING PANELS/AS REQUIRED FOR CONSISTENT APPEARANCE.
- 11 LIGHT FIXTURE, RE: ELEC.
- 12 RELOCATED EXISITNG LIGHT FIXTURE, RE: ELEC.
- 13 TEMPORARILY PROVIDE OPENING FOR PUBLIC AT THIS LOCATION. RELOCATE AT COMPLETION.
- 14 PROVIDE NEW CEILING MOUNTED SIGNS ALL AIRLINES

TICKETING TSA SCREENING ---->

15 REINSTALL SIGN "RESTROOMS"

- "BAGGAGE CLAIM GROUND TRANSPORTATION"
- 18 PROVIDE NEW CEILING MONTE SIGN (2 SIDES)
- 19 REINSTALL TOILET ROOM ADA SIGNS
- 20 NEW TILE AREA, ROOM [1200] CIRCULATION
- 21 FLOOR DOOR, LOCATED ABOVE EXISTING
- 22 REMOVE TEMPORARY PARTITION AT WORK
- 23 PROVIDE GYPSUM BOARD AND WOOD WALL CAP TO FINISH CUT RAILING END FLAT.

GENERAL NOTES

- 1. SEE SHEET 2.G-001 FOR GENERAL PROJECT NOTES, LEGENDS, AND ABBREVIATIONS.
- 2. SEE FINISH SCHEDULE FOR CEILING AND CEILING GRID TYPES.

AT PERIMETERS WHEN POSSIBLE.

3. EXCEPT WHERE INDICATED, CENTER CEILING GRIDS IN ROOMS. USE HALF TILES OR GREATER NOT FOR


CONSTRUCTION


- 4. ALIGN CEILING ITEMS AS SHOWN, WITH COMMON CENTERLINES TYPICALLY. CENTER ITEMS IN CEILING, OR IN AREAS UNLESS INDICATED OTHERWISE.
- 5. WHERE TEGULAR OR BEVELED TILE IS USED, PAINT ALL CUT EDGES TO MATCH.
- 6. CAULK JOINT BETWEEN CEILNG GRID (WALL ANGLE) AND WALL WHERE GAPS ARE LARGER THAN 1/8" OR GREATER.
- PROVIDE ACCESS PANELS AS REQUIRED IN GWB CEILNGS FOR ACCESS AS REQUIRED BY ALL
- 8. FIRE SPRINKLERS SHALL BE CENTERED IN CEILING TILE OR HALF TILE AS SHOWN. FIRE SPRINKELRS SHALL BE LOCATED IN ALIGNMENT WITH OTHER CEILING ITEMS AND SHALL BE PLACED IN COORDINATION WITH LIGHTING

FIXTURE POSITIONS INDICATED, TYPICAL.

- FIRE SPRINKELRS SHOWN ARE FOR COORDIATION PURPOSES ONLY. ADDITIONAL SPRINKLER HEADS MAY BE REQUIRED FOR CODE COMPLIANCE, AS DETERMINED BY THE FIRE PROTECTION DESIGNER. SPRINKELRS ARE NOT SHOWN IN ALL AREAS WHERE REQUIRED. FIRE PROTECTION CONTRACTOR SHALL BE RESPONSIBLE FOR PROVIDING A COMPLETE AND FULLY CODE COMPLIANT SYSTEM, INCLUDING HEADS NOT INDICATED IN THIS DRWAING. SIDEWALL MOUNT SPRINKLER HEADS UNDER BALCONIES ARE NOT SHOWN IN THE CEILING
- 10. SEE MECHANICAL, ELECTRICAL, AND PLUMBING DRAWINGS FOR ADDITIONAL INFORMATION.
- 11. WHERE ARCHITECTURAL DRAWINGS DEPICT MECHANICAL OR ELECTRICAL ITEMS OR EQUIPMENT (LIGHTS, DIFFUSERS, ETC.) INSTALLATION OF SUCH ITEMS SHALL BE COORDINATED WITH EACH RESPECTIVE TRADE SUB-CONTRACTORS.
- 12. WHERE DRAWINGS DO NOT ACCESS INSTALLATION METHODOLOGY, THE CONTRACTOR SHALL BE BOUND TO PERFORM IN STRICT COMPLIANCE WITH THE MANUFACTURER'S SPECIFICATIONS, AND STANDARD INDUSTRY STANDARDS.


CEILING LEGEND:

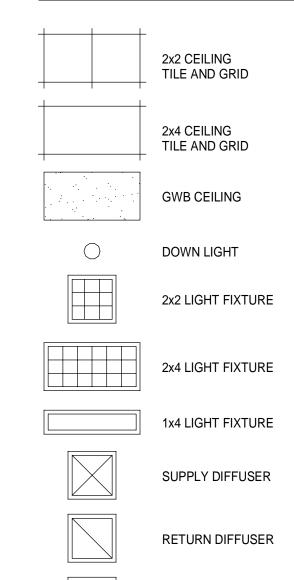



EXHAUST DIFFUSER

LINEAR DIFFUSER

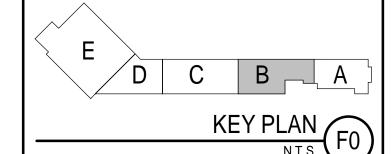

PORTLAND INTERNATIONAL JETPORT
VERTICAL CIRCULATION IMPROVEMENTS
1001 WESTBROOK STREET

As indicated 12/21/17