

NOTE: A LICENSED GEOTECHNICAL ENGINEER IN THE STATE OF MAINE SHALL OBSERVE THE SUBGRADES BELOW THE ELEVATOR AND ESCALATOR FOOTINGS PRIOR TO CONSTRUCTION. GC SHALL COORDINATE THESE INSPECTIONS.



FOOTING SCHEDULE		
FOOTING MARK	FOOTING SIZE	REINF EACH WAY BOT U.N.O.
F3	3'-0" x 3'-0" x 3'-0"	3#5
F5	5'-0" x 5'-0" x 1'-0"	5#5
F7	7'-0" x 7'-0" x 1'-6"	7#6

FIRST FLOOR/FOUNDATION PLAN

1/8"=1'-0"

NOTES:

- INDICATES SPAN DIRECTION OF 2 1/2" CONC SLAB ON 1.5VL20 COMPOSITE DECK (4 1/2" TOTAL, 3 SPAN CONT MIN) W/8x6-W1.4XW1.4 W.W.F. AT TOP.
- REF SLAB ELEVATION 104'-0" AT ENTRY. ELEVATION EQUALS EXISTING TOP OF SLAB ELEVATION. VERIFY ACTUAL ELEVATION IN FIELD.
- G.C. VERIFY IN FIELD ALL EXIST DIMENSIONS AND CONDITIONS.
- DIMENSIONS IDENTIFIED AS 'X-XX"' SHALL BE VERIFIED BY THE G.C. WALL APPROVED ELEVATOR AND/OR EXISTING CONDITIONS.
- PROVIDE 4" FIBER REINF SLAB TO MATCH EXISTING T/SLAB ELEVATION. SEE S2.1 FOR ADDL INFO.
- P1, P2, ETC. INDICATES CONC PIER AT ELEVATION 'X-XX"'. SEE S2.1 FOR DETAILS.
- C.J. INDICATES CONTROL/CONSTRUCTION JOINT. SEE DWG S2.1 FOR TYPICAL DETAILS.
- * INDICATES DIMENSION TO BE VERIFIED BY G.C. W/APPROVED ELEVATOR AND ESCALATOR.

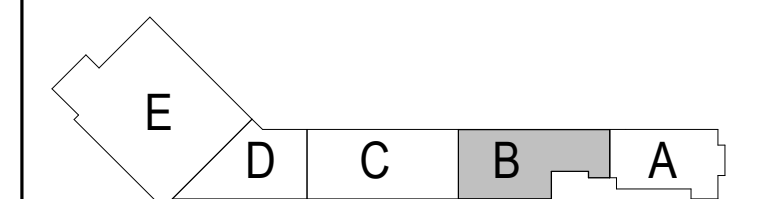

KEY PLAN
N.T.S.