

T:\00_17FH\Projects\PP0114_Mellen_GrandDrawings\Schedules\A7.0_Schedules\A7.0_ScheduleA.DWG - 2/27/2014 10:56:23 AM

ROOM FINISH SCHEDULE - BUILDING A

Table with columns: ROOM #, ROOM NAME, WALLS (NORTH, EAST, SOUTH, WEST, BASE), FLOOR, CEILINGS (MATERIAL, HEIGHT, FINISH), REMARKS. Rows include LAUNDRY, MECHANICAL, CORRIDOR, STAIRS, ELEVATOR, MACHINE ROOM, TOILET, WORKROOM, JANITOR, SERVER, EDUCATION OFFICE, LOBBY, VESTIBULE, STAIRS, LEASIBLE SPACE, etc.

Table with columns: ROOM #, ROOM NAME, WALLS, FLOOR, CEILINGS, REMARKS. Rows include KITCHEN/DINING, LIVING, STAIRS 2, LIVING, DINING, KITCHEN, WC, BATH, CORRIDOR, BEDROOM, etc.



ROOM FINISH SCHEDULE - BUILDING B

Table with columns: ROOM #, ROOM NAME, WALLS, FLOOR, CEILINGS, REMARKS. Rows include STAIRS, CORRIDOR, STORAGE, NOT USED, MECHANICAL, STORAGE, LAUNDRY, ENTRY STAIRS, LIVING ROOM, DINING, KITCHEN, BATH, LAUNDRY, CORRIDOR, NOT USED, BEDROOM, STAIRS, ENTRY STAIRS, DINING, KITCHEN, NOT USED, LIVING ROOM, LIVING ROOM, NOT USED, KITCHEN, DINING, ENTRY STAIRS, STAIRS, BEDROOM, BEDROOM, NOT USED, KITCHEN, DINING, ENTRY STAIRS, LIVING ROOM, ENTRY STAIRS, etc.

Table with columns: ROOM #, ROOM NAME, WALLS, FLOOR, CEILINGS, REMARKS. Rows include BATH, CORRIDOR, CORRIDOR, BEDROOM, BATH, CORRIDOR, DINING, KITCHEN, LIVING, STAIRS 2, LIVING, DINING, KITCHEN, WC, BATH, CORRIDOR, BEDROOM, BEDROOM, BEDROOM, etc.

ROOM FINISH GENERAL NOTES
1 ALSO SEE INTERIOR ELEVATIONS FOR GRAPHIC DEPICTIONS OF EXTENT OF FINISHES
2 INSTALL MOISTURE RESISTANT GWS IN ALL AREAS WHERE PLUMBING FIXTURES EXIST
3 ALL FASTENING TO MASONRY WALLS IS TO BE WITHIN JOINTS ONLY. ANY BRICK OR BLOCK PENETRATIONS TO BE APPROVED BY ARCHITECT PRIOR TO WORK
4 CLOSETS IN RESIDENCES SHALL BE FINISHED AS THE ROOMS THEY SERVICE
5 ALL SPACES DESIGNATED AS CLOSET OR 'CL.' ARE TO RECEIVE ONE CLOTHING ROD @ 2" AFF AND ONE 12" WIRE SHELF ABOVE THE ROD ALONG THE WALL OPPOSITE THE DOOR UNLESS NOTED OTHERWISE. ALL SPACES DESIGNATED AS LINEN CLOSETS (LIN) OR PANTRY (PAN) ARE TO RECEIVE FOUR 12" WIRE SHELVES SPACED AT 1'-6" OC STARTING AT FINISH FLOOR

FINISH SCHEDULE KEY
WALLS
1 CONCRETE
2 GWS - PAINTED
3 PAINTED WOOD
4 COLORED RECYCLED PLASTIC PANELS
5 CERAMIC TILE (2" X 2") W/ 2 ACCENT/BORDER COLORS
6 NOT USED
7 WHITE RECYCLED PLASTIC PANELS, KEMUTE TRIM ACCESSORIES
8 PLYWOOD
9
BASE
10 VINYL (ON GWS ONLY)
11 PAINTED HARDWOOD. SEE DETAILS FOR PROFILES
12 CERAMIC TILE (4" X 4")
13 QUARRY TILE COVE (6"X6")
14
FLOORS
20 CONCRETE
21 CARPET
22 CERAMIC TILE (4" X 4") W/ 2 ACCENT/BORDER COLORS
23 RUBBER
24 ENGINEERED WOOD
25 LINOLEUM
26 WALK OFF MATS (MATS INC. BERBER VINYLBACK)
27 QUARRY TILE (6"X6")
CEILINGS
30 GWS SOFFIT - PAINTED
31 SUSPENDED ACOUSTICAL CEILING - WASHABLE
32 GWS - PAINTED
33 1" X 1" ADHERED ACOUSTICAL TILE
34

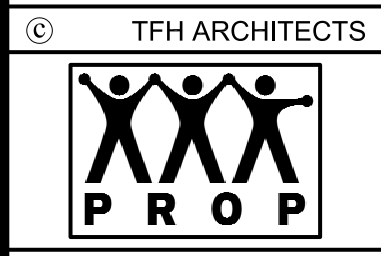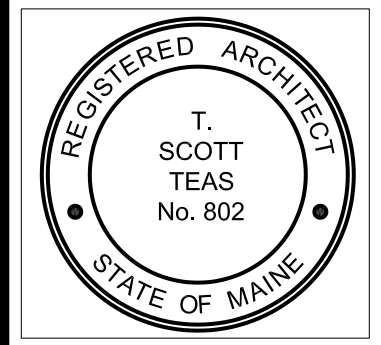

GRANT & MELLEEN SREET
PARKSIDE NEIGHBORHOOD CENTER & AFFORDABLE HOUSING
PEOPLE'S REGIONAL OPPORTUNITY PROGRAM
PORTLAND, MAINE



TFH ARCHITECTS
100 COMMERCIAL STREET
PORTLAND MAINE 04101
TELEPHONE 207 775 6141
ARCHITECTURE PLANNING

CONSULTANTS:
CIVIL: Pritham & Greer
170 US Route One
Falmouth, ME 04105
207-781-0242
STRUCTURAL: Structural Design Consulting
Five Balm Lane
Falmouth, ME 04105-2448
207-478-0030
MECHANICAL: Whitney Engineering
10 Danforth Place
Portland, ME 04102
207-433-2951
ELECTRICAL: Bennett Engineering
7 Bennett Road
Frisco, ME 04032
207-865-9475

REVISIONS:

DATE: 01/29/04

PROJECT No. 0114

DRAWN BY: DAMISA

CHECKED BY: TST

SCALE: AS NOTED

SHEET TITLE:
FINISH
SCHEDULES

BUILDING A/B
A7.0