

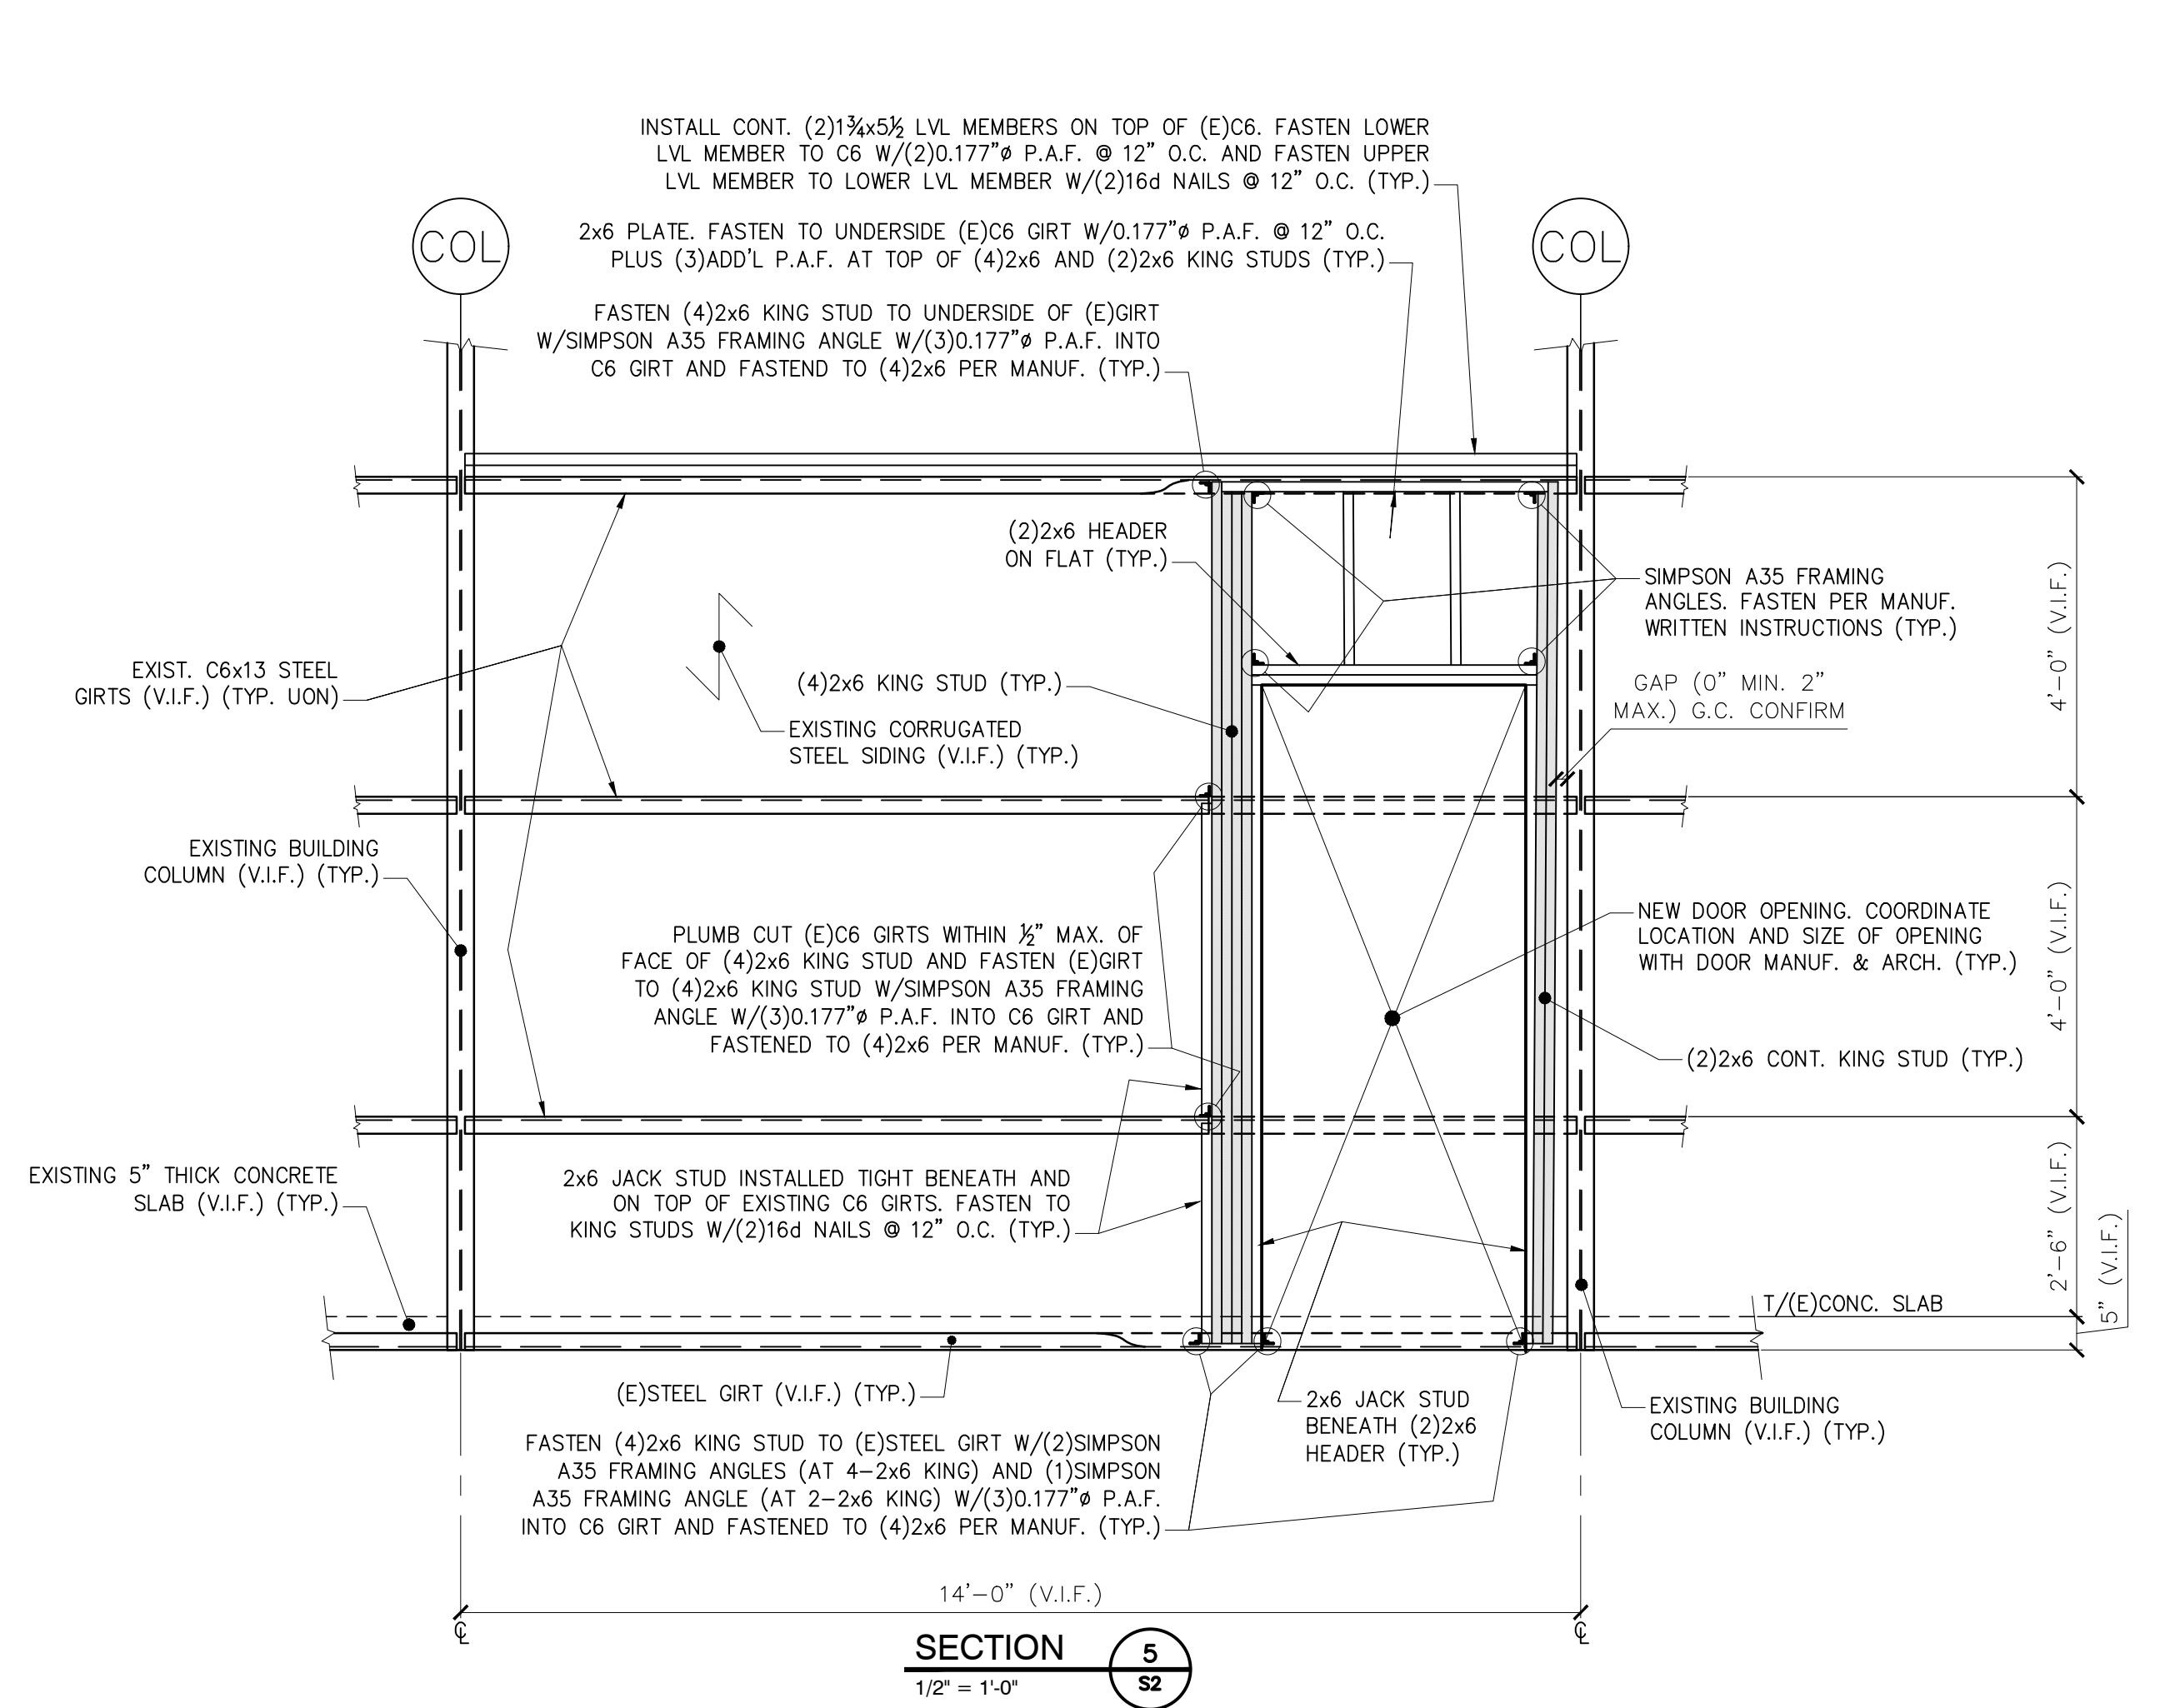


- CONTINUOUS (2)2x8 RIPPED TO FIT TIGHT PLUS CONT. (2)3/8" THICK PLYWOOD SPACERS BOTH SIDES OF W8x67 STEEL BEAM AT SECTION 3/S2.
- CONTINUOUS (2)2x8 RIPPED TO FIT TIGHT PLUS 1/2" PLYWOOD SPACER ON BOTH SIDES OF W8x24 STEEL BEAM AT SECTION 2/S2.
- CONTINUOUS 2x8 PLUS CONT. (2)3/8" THICK PLYWOOD SPACERS ON BOTH SIDES OF W8x18 STEEL BEAM AT SECTION 4/S2.
- BEAR ALL BLOCKING ON BOTTOM FLANGE AND FASTEN TO W8 W/(2) ROWS OF 1/2" x A36 THRU BOLTS @ 3'-0" O.C. AS SHOWN (TYP.)

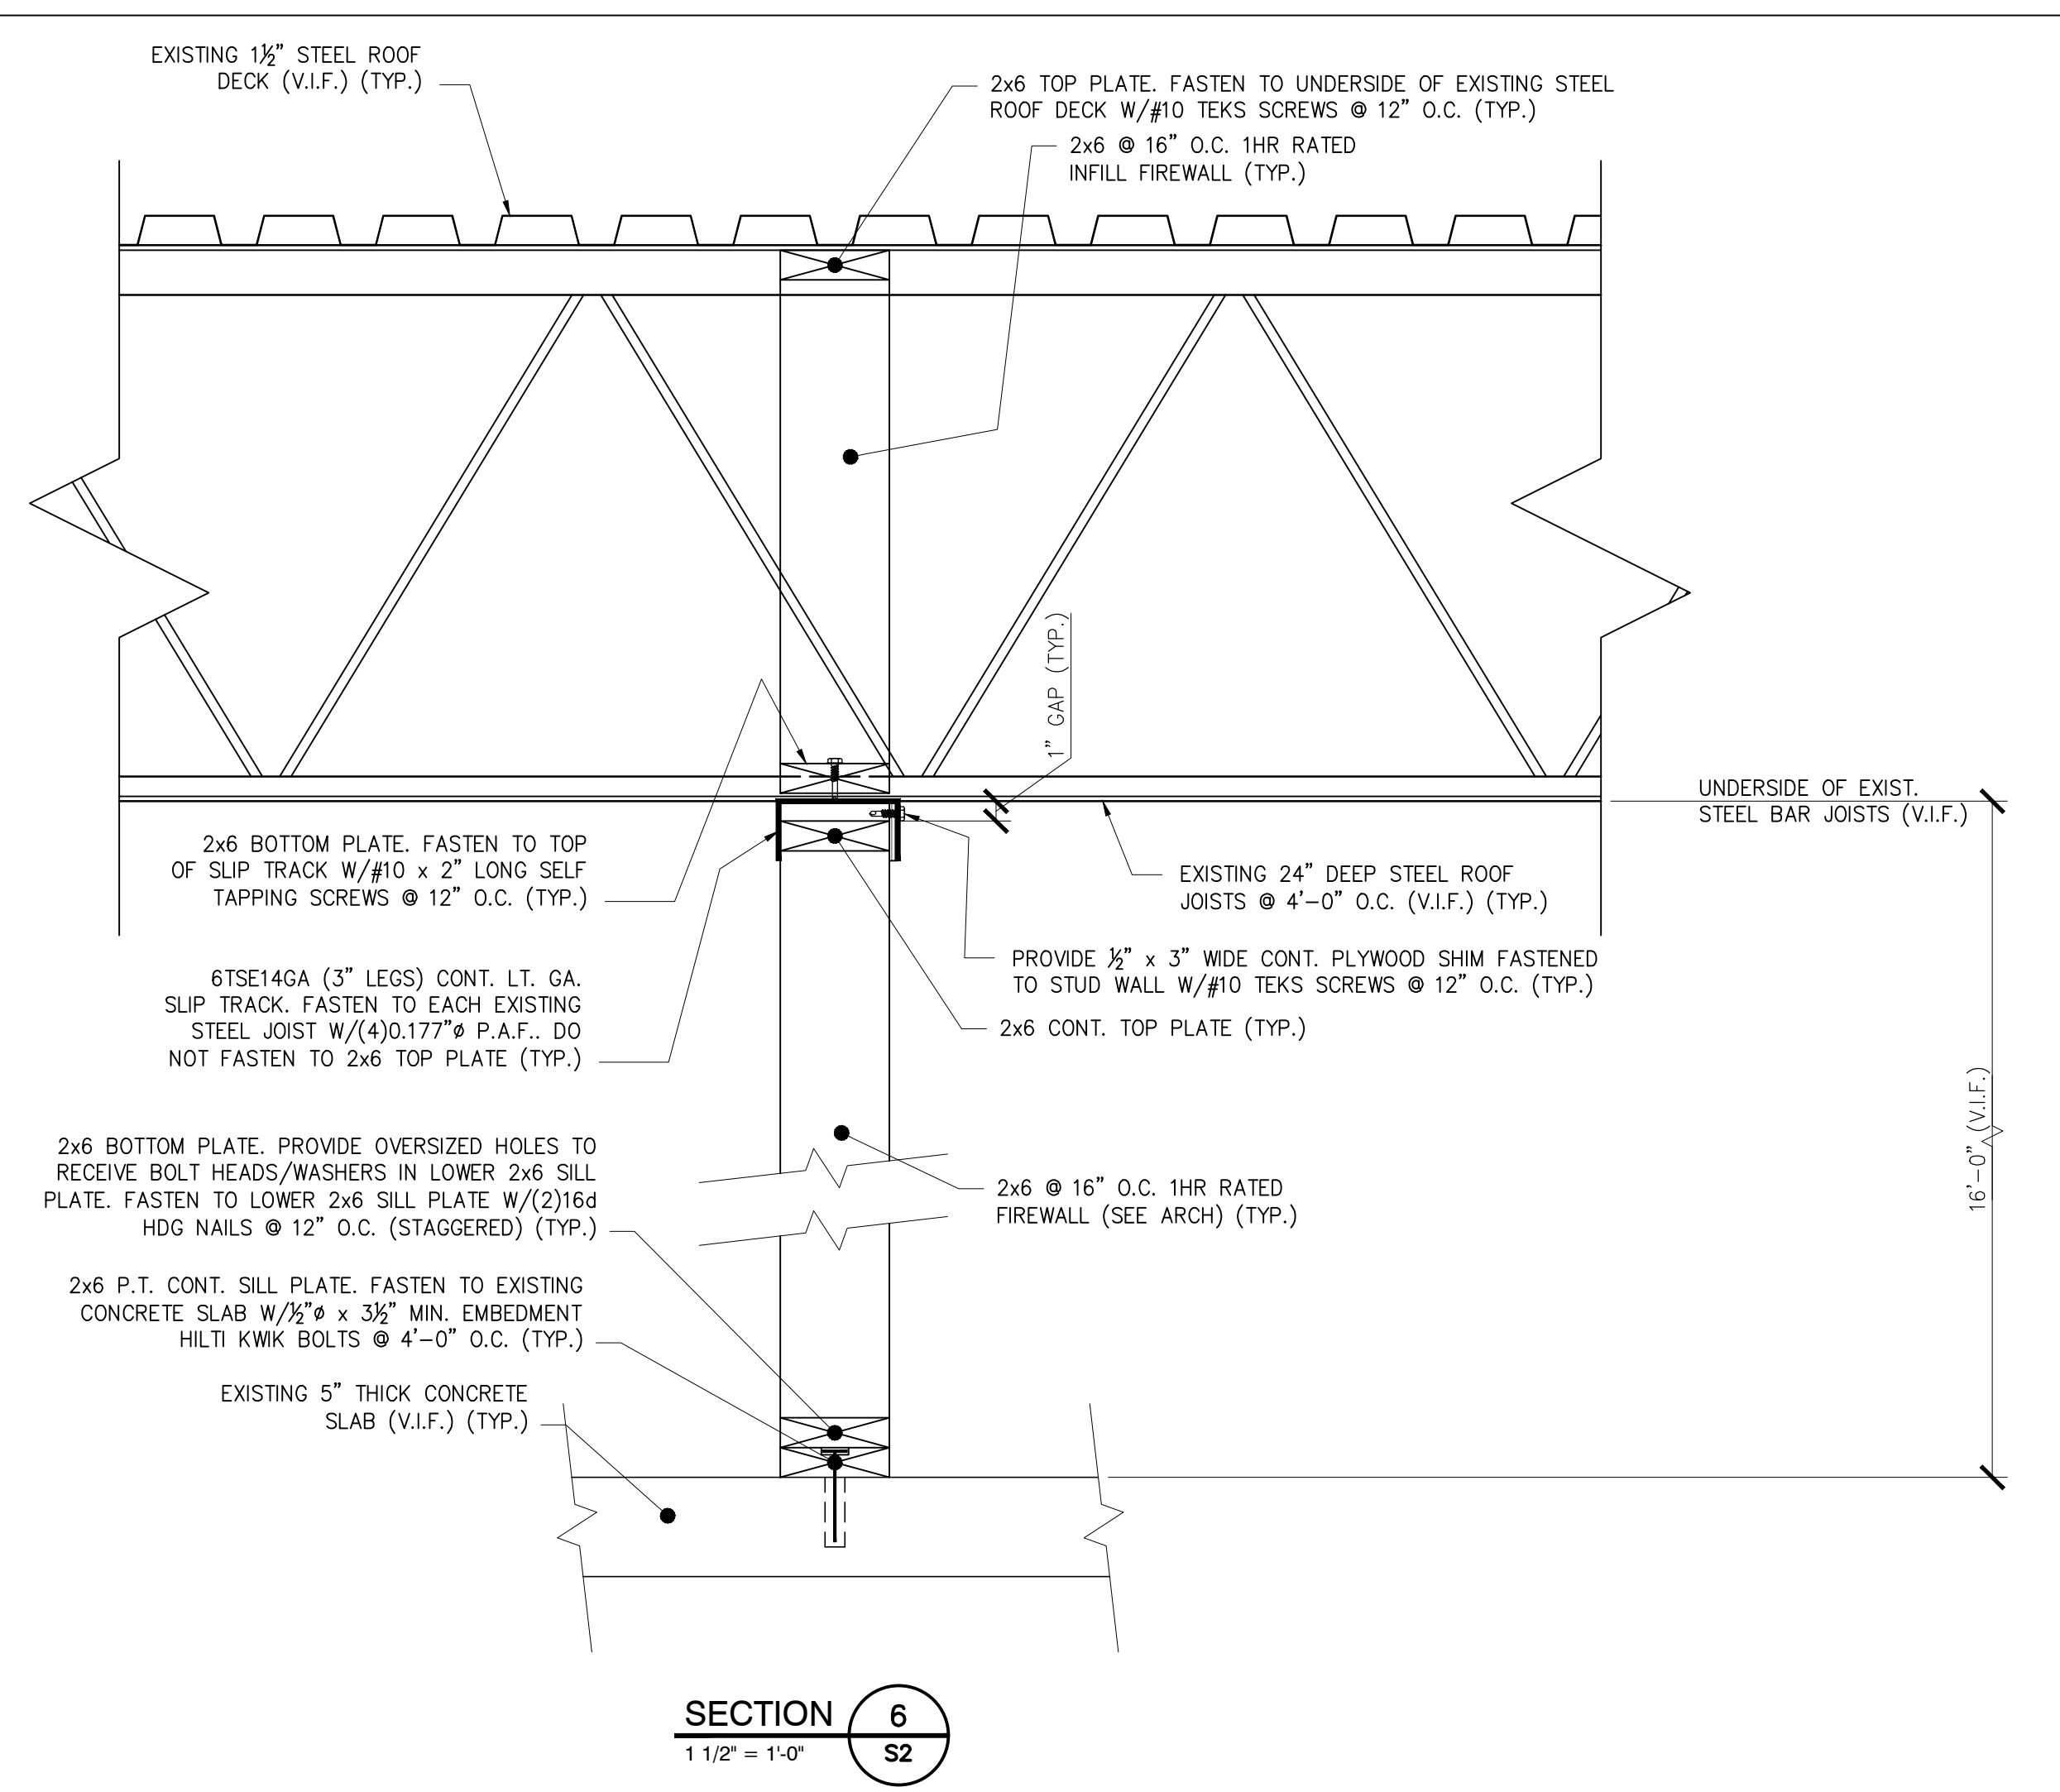

L & L STRUCTURAL ENGINEERING SERVICES, INC.
 SIX O. STREET
 SOUTH PORTLAND, MAINE 04106
 PHONE: (207) 767-4830
 FAX: (207) 799-5432
 EMAIL: LLEASURE@LL-ENG.COM

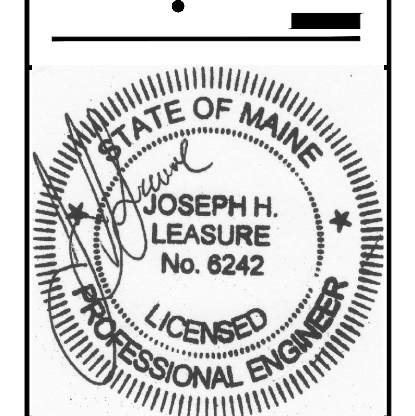

rev.	date	description	designed by: JHL	checked by: JHL	scale: AS NOTED	plot date: 07/13/2016	project #: 2016-120
0	07/08/16	FOR CONSTRUCTION					
1	07/13/16	GENERAL REVISIONS					

BUILDING LOCATED AT
 10 THOMPSON POINT ROAD
 PORTLAND, MAINE
BUILDING RENOVATION - INTERIOR RETROFIT FRAMING SECTIONS, AND DETAILS

S3

THESE DRAWINGS HAVE BEEN DEVELOPED BY L&L STRUCTURAL ENGINEERING SERVICES, INC. FOR THE TITLED SET ONLY. THE DRAWINGS ARE THE SOLE PROPERTY OF L&L ENGINEERING SERVICES, INC. AND THEY SHALL NOT BE USED, LENT, COPIED OR ALTERED WITHOUT THE WRITTEN CONSENT OF L&L STRUCTURAL ENGINEERING SERVICES, INC.