


S3 FOUNDATION PLAN

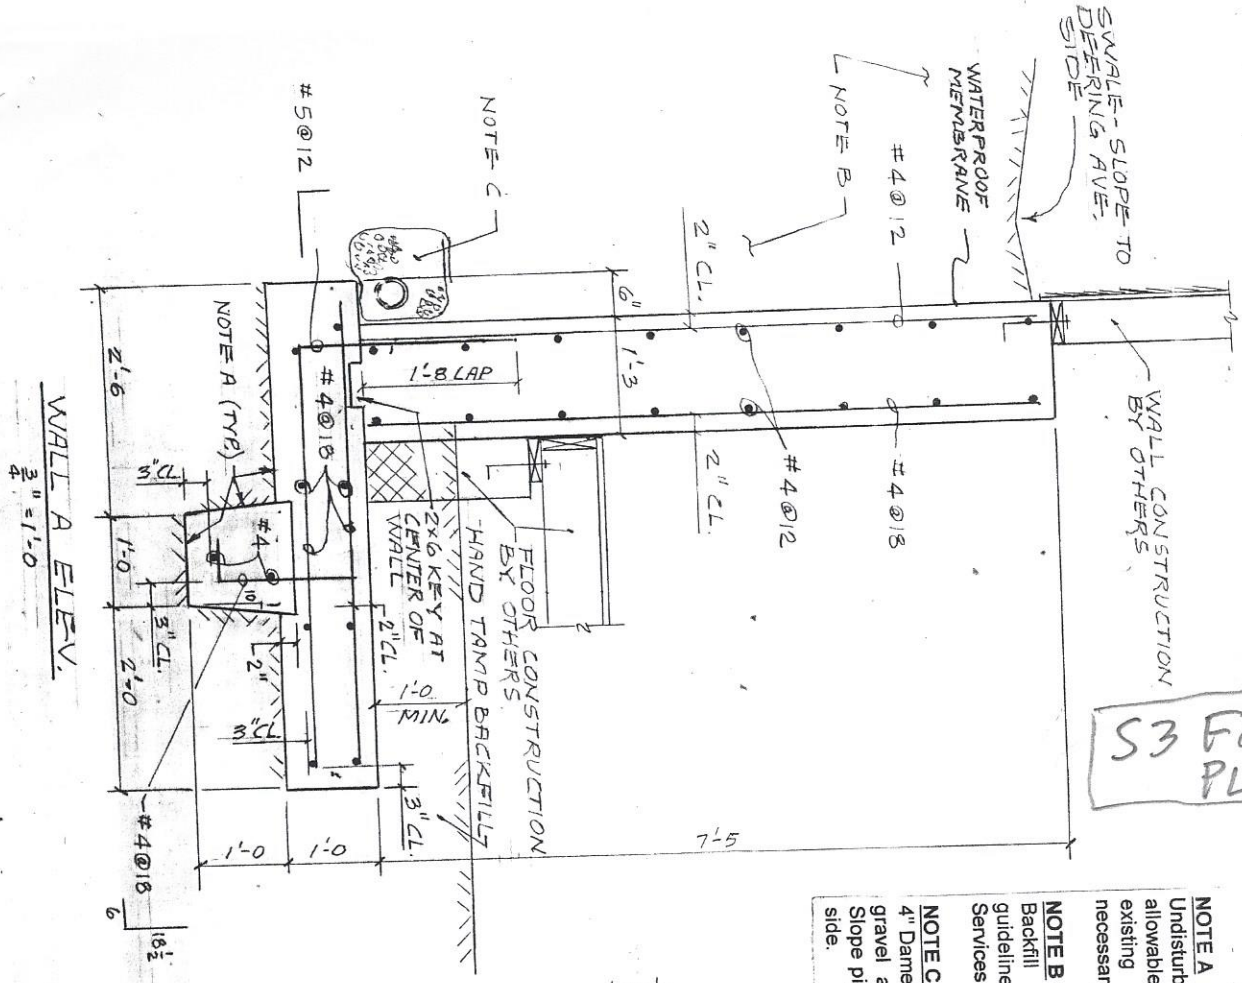

NOTE A
 Undisturbed soil with 1500 psf minimum allowable bearing capacity. Compact existing soil (manual tamped) if necessary.

NOTE B
 Backfill material as per item 6, guidelines of Summit Geoen지니어ing Services report.

NOTE C
 4" Diameter perforated pipe encased in gravel and wrapped in filter fabric. Slope pipe to daylight at Deering Ave side.

DO NOT BACKFILL OR LOAD TOP OF WALL FOR 4 DAYS AFTER CONCRETING.

