

| | | | | | | | |
|-------------------------------|--|---|--|---|--|---|--|
| Location of Construction: | | Owner: | | Phone: | | Permit No: 950233 | |
| Owner Address: | | Leasee/Buyer's Name: | | Phone: | | Business Name: | |
| Contractor Name: | | Address: | | Phone: | | <div style="border: 2px solid black; padding: 5px; text-align: center;"> PERMIT ISSUED Permit Issued: MAR 15 1995 CITY OF PORTLAND </div> | |
| Past Use: | | Proposed Use: | | COST OF WORK: \$ | | | |
| Proposed Project Description: | | FIRE DEPT. <input type="checkbox"/> Approved <input type="checkbox"/> Denied | | INSPECTION: Use Group: <i>R3</i> Type: <i>5A</i> <i>MOCA 97</i> | | Signature: <i>[Signature]</i> | |
| | | Signature: | | Signature: | | Zone: CBL: <i>051F-25</i> | |
| | | PEDESTRIAN ACTIVITIES DISTRICT (P.U.D.) | | Action: <input type="checkbox"/> Approved <input type="checkbox"/> Approved with Conditions <input type="checkbox"/> Denied | | Zoning Approval: <i>TO Remain 1-Family</i> | |
| Permit Taken By: | | Date Applied For: | | Signature: | | Date: | |

1. This permit application doesn't preclude the Applicant(s) from meeting applicable State and Federal rules.
2. Building permits do not include plumbing, septic or electrical work.
3. Building permits are void if work is not started within six (6) months of the date of issuance. False information may invalidate a building permit and stop all work..

Zoning Appeal

Variance
 Miscellaneous
 Conditional Use
 Interpretation
 Approved
 Denied

Historic Preservation

Not in District or Landmark
 Does Not Require Review
 Requires Review

Action:

Approved
 Approved with Conditions
 Denied

Date: *3/11/95*

PERMIT ISSUED WITH REQUIREMENTS

CERTIFICATION

I hereby certify that I am the owner of record of the named property, or that the proposed work is authorized by the owner of record and that I have been authorized by the owner to make this application as his authorized agent and I agree to conform to all applicable laws of this jurisdiction. In addition, if a permit for work described in the application issued, I certify that the code official's authorized representative shall have the authority to enter all areas covered by such permit at any reasonable hour to enforce the provisions of the code(s) applicable to such permit

| | | | |
|---|----------|-------|--------|
| SIGNATURE OF APPLICANT | ADDRESS: | DATE: | PHONE: |
| RESPONSIBLE PERSON IN CHARGE OF WORK, TITLE | | | PHONE: |

CEO DISTRICT 3
Ms Simpson

COMMENTS

3.16.95 No work yet.

3.17.95 N/A

4.20.95 The owner has denied all existing walls, runs of
which are load bearing. They are to be removed. (Has a) a top of exterior
walls chimney to be removed. (Has a) a top of exterior
will be reinforcing over supports members. The owner
is asking us on electrician he will have start-up
done by a new electrician. New conductors installed
and the meter of these is insulated well. Original
readers plus new each window opening.
10/27/95 Interior framing + some sheetrock up - the removed
chimney completely. 4x4s for supports were existing. Fan
electrical himself, will be doing meter and pulling
electrical permit for work done. Has not decided on vent or
hood where chimney was.

9-17-96 Filed inspect inspection - Owner *Not*

Type

Inspection Record

Not

Date

Foundation:

Framing:

Plumbing:

Final:

Other:


BUILDING PERMIT REPORT

DATE: 14/Mar/95 ADDRESS 178 NEAL ST.
REASON FOR PERMIT: MAKE INTERIOR RENOVATIONS
BLDG. OWNER: Richard & Yin Smart
CONTRACTOR owner APPROVED: *7*9
PERMIT APPLICANT: _____ DENIED: 1/1


CONDITION OF APPROVAL OR DENIAL

1. Before concrete for foundation is placed, approvals from Public Works and Inspection Services must be obtained. (a 24 hour notice is required prior to inspection).
2. Precaution must be taken to protect concrete from freezing.
3. It is strongly recommended that a register land surveyor check all foundation forms before concrete is placed.
4. All vertical openings shall be closed with construction having a fire rating of at least one (1) hr., including fire doors with selfclosers.
5. Each apartment shall have access to (2) separate, remote and approved means of egress. A single exit is acceptable when its exits directly from the apartment to the building exterior with no communications to other apartment units.
6. The boiler shall be protected by enclosing with one (1) hour fire rated construction including fire doors and ceiling, or by providing automatic extinguishment. Sprinkler piping serving not more than six sprinklers may be connected to a domestic water supply having a capacity sufficient to provide 0.15 gallons per minute, per square foot of floor throughout the entire area. An indication shut-off valve shall be installed in an accessible locations between the sprinkler and the connection to the domestic water supply. Minimum pipe shall be 3/4 inch copper or 1 inch steel. Maximum coverage area of a residential sprinkler is 14 sq. ft. per sprinkler.
7. Every sleeping room below the fourth story in buildings of Use Groups R and I-1 shall have at least one operable window or exterior door approved for emergency egress or rescue. The units must be operable from the inside opening without the use of special knowledge or separated tools. Where windows are provided as a means of egress or rescue, they shall have a sill height not more that 44 inches (1118mm) above the floor. All egress or rescue windows from sleeping room must have minimum net clear opening height dimension shall be 24 inches (610mm). The minimum net clear opening width dimension shall be 20 inches (508 mm) and a minimum net clear opening of 5.7 sq. ft.
8. This permit does not excuse the applicant from obtaining any license which may be needed from the City Clerk's office.
9. All single and multiple station smoke detectors shall be of an approved type and shall be installed in accordance with the provisions of the building code 919.3.2 (BOCA National Building Code 1993), and NFPA 101 Chapter 18 & 19. (smoke detectors shall be installed and maintained at the following locations):
 1. In the immediate vicinity of bedrooms
 2. In all bedrooms
 3. In each story within a dwelling unit, including basements

10. Private garages located beneath habitable rooms in occupancies in Use Group R-1, R-2, R-3 or I-1 shall be separated from adjacent interior spaces by fire partitions and floor/ceiling assembly which are constructed with not less than 1-hour fire resisting rating. Private garages attached side-by-side to rooms in the above occupancies shall be completely separated from the interior spaces and the attic area by means of 1/2 inch gypsum board or the equivalent applied to the garage side. (Chapter 4 section 407.0 of the BOCA/1993).
11. Guardrail & Handrails - A guardrail system is a system of building components located near the open sides of elevated walking surfaces for the purpose of minimizing the possibility of an accidental fall from the walking surface to the lower level. Minimum height all Use Groups 42", except Use Group R which is 36". In occupancies in Use Group A,B, H-4, I-1, I-2 M and R and public garages and open parking structure, open guards shall have balusters or be of solid material such that a sphere with a diameter of 4" cannot pass through any opening. Guards shall not have an ornamental pattern that would provide a ladder effect.
12. All exit signs, lights, and means of egress lighting shall be done in accordance with Chapter 10, section & subsections 1023. & 1024. of the City's building code. (The BOCA National Bldg. Code 1993).
13. Stair construction in Use Group R-3 & R-4 is a minimum of 9" tread and 8-1/4" maximum rise.
14. Headroom in habitable space is a minimum of 7'6".
15. The minimum headroom in all parts of a stairway shall not be less than 80 inches.
16. All construction and demolition debris must be disposed at the City's authorized reclamation site. The fee rate is attached. Proof of such disposal must be furnished to the office of Inspection Services before final Certificate of Occupancy is issued or demolition permit is granted.
17. Section 25-135 of the Municipal Code for the City of Portland states "No person or utility shall be granted a permit to excavate or open any street or sidewalk from the time of November 15 of each year to April 15 of the following year".
18. The builder of a facility to which Section 4594-C of the Maine State Human Rights Act, Title 5 MRSA refers, shall obtain a certification from a design professional that the plans of the facility meet the standards of construction required by this section. Prior to commencing construction of the facility, the builder shall submit the certification to the Division of Inspections Services.
19. A portable fire extinguisher shall be located as per NFPA #10. They shall bear the label of an approved Agency and be of an approved type.


P. Samuel Hoffses
Chief of Inspections

/dmm 3/9/95 redo w/changes

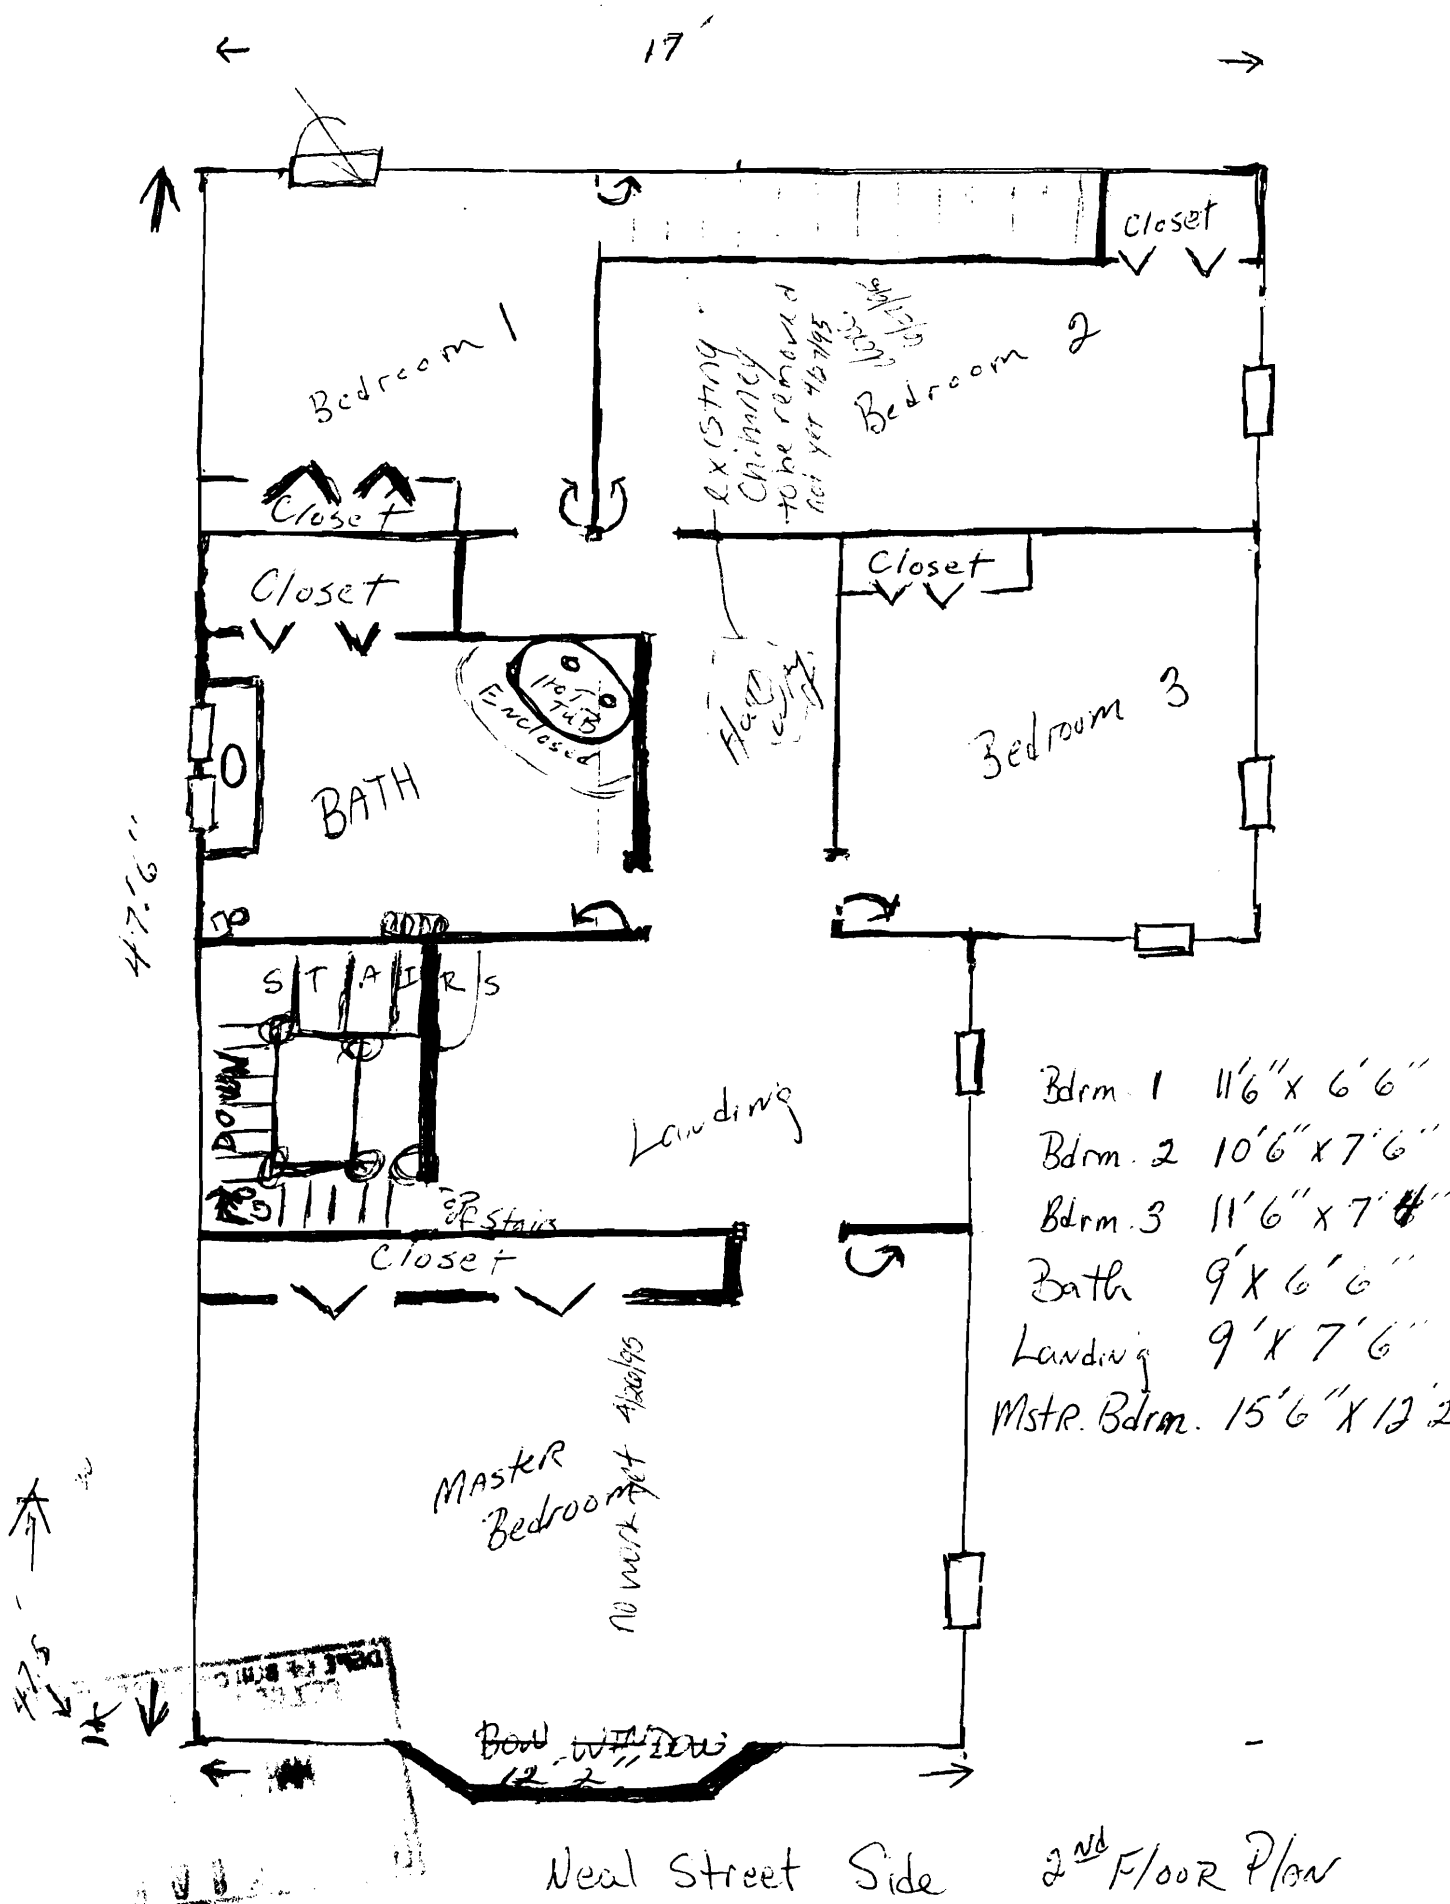

- Bdrm. 1 11'6" x 6'6"
- Bdrm. 2 10'6" x 7'6"
- Bdrm. 3 11'6" x 7'6"
- Bath 9' x 6'6"
- Landing 9' x 7'6"
- Mstr. Bdrm. 15'6" x 12'2"

Near Street Side 2nd Floor Plan