

City of Portland, Maine – Building or Use Permit Application 389 Congress Street, 04101, Tel: (207) 874-8703, FAX: 874-8716

Location of Construction: 49 Cobb Ave		Owner: Goodwin, Jeannie		Phone:		Permit No: 951240	
Owner Address:		Leasee/Buyer's Name:		Phone:		Business Name:	
Contractor Name: Maine - tain		Address: 8 Maple St Westbrook, ME		Phone: 04092 856-2379		<div style="border: 2px solid black; padding: 5px; text-align: center;"> PERMIT ISSUED Permit Issued: NOV 27 1995 CITY OF PORTLAND </div>	
Past Use: 1-1am		Proposed Use: Same w/att garage		COST OF WORK: \$ 7,000.00 PERMIT FEE: \$ 55.00			
Proposed Project Description: Construct Attached Garage (22 x 24)		FIRE DEPT. <input type="checkbox"/> Approved <input type="checkbox"/> Denied Signature: _____ PEDESTRIAN ACTIVITIES DISTRICT (P.A.D.) Action: <input type="checkbox"/> Approved <input type="checkbox"/> Approved with Conditions <input type="checkbox"/> Denied Signature: _____ Date: _____		INSPECTION: Use Group: 4 Type 5/B Signature: _____ Zone: R-2 CBL: 212-A-012 Zoning Approval: <i>OK - 5/11/27/95</i> Special Zone or Reviews: <input type="checkbox"/> Shoreland <input type="checkbox"/> Wetland <input type="checkbox"/> Flood Zone <input type="checkbox"/> Subdivision <input type="checkbox"/> Site Plan maj <input type="checkbox"/> minor <input type="checkbox"/> mm <input type="checkbox"/>			
Permit Taken By: Mary Gresik		Date Applied For: 21 November 1995					

1. This permit application doesn't preclude the Applicant(s) from meeting applicable State and Federal rules.
2. Building permits do not include plumbing, septic or electrical work.
3. Building permits are void if work is not started within six (6) months of the date of issuance. False information may invalidate a building permit and stop all work..

PERMIT ISSUED WITH REQUIREMENTS
 PERMIT ISSUED WITH REQUIREMENTS

CERTIFICATION

I hereby certify that I am the owner of record of the named property, or that the proposed work is authorized by the owner of record and that I have been authorized by the owner to make this application as his authorized agent and I agree to conform to all applicable laws of this jurisdiction. In addition, if a permit for work described in the application issued, I certify that the code official's authorized representative shall have the authority to enter all areas covered by such permit at any reasonable hour to enforce the provisions of the code(s) applicable to such permit

SIGNATURE OF APPLICANT <i>John Sirois</i>		ADDRESS:		DATE: 21 November 1995		PHONE:	
RESPONSIBLE PERSON IN CHARGE OF WORK, TITLE						PHONE:	

- Zoning Appeal**
- Variance
 - Miscellaneous
 - Conditional Use
 - Interpretation
 - Approved
 - Denied

- Historic Preservation**
- Not in District or Landmark
 - Does Not Require Review
 - Requires Review

Action:

- Approved
- Approved with Conditions
- Denied

Date: _____

CEO DISTRICT 4

K. Carroll

COMMENTS

11/30/95 Called for foundation insp. No re-rod pins from new to existing foundation
Could not verify setbacks - spoke w/ contractor, told him to install pins & have
Right side & rear boundaries surveyed - he will call back @
12/4/95 pins installed - Setbacks verified - ok to pour @
12/6/95 Ok to install -
4/14/96 - Rosh from ok - ok to close
7/1/96 Turned over to P Powers
10/8/98 - Work complete ok to use @

Inspection Record

Type	Date
Foundation: _____	_____
Framing: _____	_____
Plumbing: _____	_____
Final: _____	_____
Other: _____	_____

BUILDING PERMIT REPORT

DATE: November 27, 1995 ADDRESS: 49 Cobb Avenue

REASON FOR PERMIT: To construct a two car attached garage


BUILDING OWNER: Jeannie Goodwin

CONTRACTOR: Maine-Tain APPROVED: See #1, 2 and 10

CONDITIONS OF APPROVAL

- * 1. Before concrete for foundation is placed, approvals from Inspection Services must be obtained. (A 24 hour notice is required prior to inspection)
- * 2. Precautions must be taken to protect concrete from freezing.
3. It is strongly recommended that a registered land surveyor check all foundation forms before concrete is placed. This is done to verify that the proper setbacks are maintained.
4. All vertical openings shall be enclosed with construction having a fire rating of at least one (1) hour, including fire doors with selfclosers.
5. Each apartment shall have access to two (2) separate, remote and approved means of egress. A single exit is acceptable when it exits directly from the apartment to the building exterior with no communications to other apartment units.
6. The boiler shall be protected by enclosing with one (1) hour fire-rated construction including fire doors and ceiling, or by providing automatic extinguishment. Sprinkler piping serving not more than six sprinklers may be connected to a domestic water supply having a capacity sufficient to provide 0.15 gallons per minute, per square foot of floor throughout the entire area. An INDICATING shut-off valve shall be installed in an accessible location between the sprinkler and the connection to the domestic water supply. Minimum pipe size shall be 3/4 inch copper or 1 inch steel. Maximum coverage area of a residential sprinkler is 144 square feet per sprinkler.
7. Every sleeping room below the fourth story in buildings of Use Groups R and I-1 shall have at least one operable window or exterior door approved for emergency egress or rescue. The units must be operable from the inside without the use of special knowledge or separate tools. Where windows are provided as means of egress or rescue, they shall have a sill height not more than 44 inches (1118mm) above the floor. All egress or rescue windows from sleeping rooms shall have a minimum net clear opening height dimension of 24 inches (610mm). The minimum net clear opening width dimension shall be 20 inches (508mm), and a minimum net clear opening of 5.7 square feet.
8. A portable fire extinguisher shall be located as per NFPA #10. They shall bear the label of an approved agency and be of an approved type.
9. All single and multiple station smoke detectors shall be of an approved type and shall be installed in accordance with the provisions of the City's Building Code, Chapter 9, Section 19, 919.3.2 (BOCA National Building Code/1993) and NFPA 101, Chapters 18 and 19. (Smoke detectors shall be installed and maintained at the following locations):
 - a. In the immediate vicinity of bedrooms
 - b. In all bedrooms
 - c. In each story within a dwelling unit, including basementsIn addition to the required AC primary power source, required smoke detectors in occupancies in Use Groups R-2, R-3 and I-1 shall receive power from a battery when the AC primary power source is interrupted.

- *10. Private garages located beneath habitable rooms in occupancies in Use Group R-1, R-2, R-3 or I-1 shall be separated from adjacent interior spaces by fire partitions and floor/ceiling assembly which are constructed with not less than 1 hour fire resisting rating. Private garages attached side-by-side to rooms in the above occupancies shall be completely separated from the interior spaces and the attic area by means of 1/2 inch gypsum board or the equivalent applied to the garage side. (Chapter 4, Section 407.0 of the BOCA/1993)
11. Guardrail and Handrails-A guardrail system is a system of building components located near the open sides of elevated walking surfaces for the purpose of minimizing the possibility of an accidental fall from the walking surface to the lower level. Minimum height all Use Groups, 42 inches, except Use Group R which is 36 inches. In occupancies in Use Group A, B, H-4, I-1, I-2 M and R and public garages and open parking structures, open guards shall have balusters or be of solid material such that a sphere with a diameter of 4 inches cannot pass through any opening. Guards shall not have an ornamental pattern that would provide a ladder effect.
12. All exit signs, lights and means of egress lighting shall be done in accordance with Chapter 10, Section and Subsections 1023. and 1024. of the City's Building Code. (The BOCA National Building Code/1993)
13. Stair construction in Use Group R-3 and R-4 is a minimum of 9" tread and 8-1/4" maximum rise. All other Use Group minimum is 11" tread, and 7" maximum rise.
14. Headroom in habitable space is a minimum of 7'6".
15. The minimum headroom in all parts of a stairway shall not be less than 80 inches.
16. All construction and demolition debris must be disposed at the City's authorized reclamation site. The fee rate is attached. Proof of such disposal must be furnished to the office of Inspection Services before final Certificate of Occupancy is issued for demolition permit is granted.
17. Section 25-135 of the Municipal Code for the City of Portland states, "No person or utility shall be granted a permit to excavate or open any street or sidewalk from the time of November 15 of each year to April 15 of the following year".
18. The builder of a facility to which Section 4594-C of the Maine State Human Rights Act, Title 5 MRSa refers, shall obtain a certification from a design professional that the plans of the facility meet the standards of construction required by this section. Prior to commencing construction of the facility, the builder shall submit the certification to the Division of Inspection Services.
19. This permit does not excuse the applicant from obtaining any license which may be needed from the City Clerk's Office.

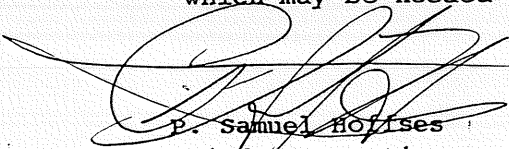
P. Samuel Hoopes
Chief, Inspection Services

Applicant: John Sirois

Date: 11/22/95

Address: 49 Cobb Ave

Assessors No.: 212-A-012

CHECK LIST AGAINST ZONING ORDINANCE

Date -

Zone Location - R-2

Interior or corner lot -

Use - New garage

Sewage Disposal -

Rear Yards - 25' req - 36' shown per contractor

Side Yards - 12' req to show 12' per contractor

Front Yards -

Projections -

Height -

Lot Area -

5,000 sq ft

Building Area -

Area per Family -

Width of Lot -

Lot Frontage -

Off-street Parking -

Loading Bays -

Site Plan -

Shoreland Zoning -

Flood Plains -

of revised
per contractor
11/27/95

Frame Mat. i 2x4 walls / 1/2" sheathing /


2x6 soist / 2x8 rafters / vinyl siding /

asphalt shingles (House color) concrete


slab No wall be front wall per contractor 11/27/95

Scale 1/4" = 1'

Front View

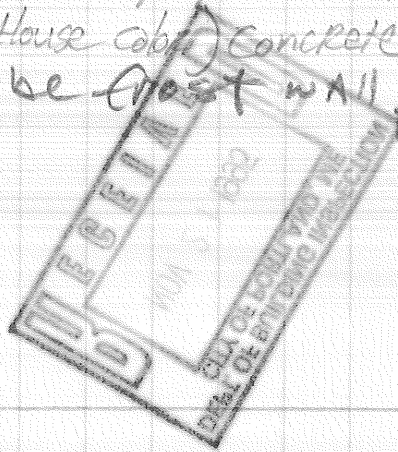

House

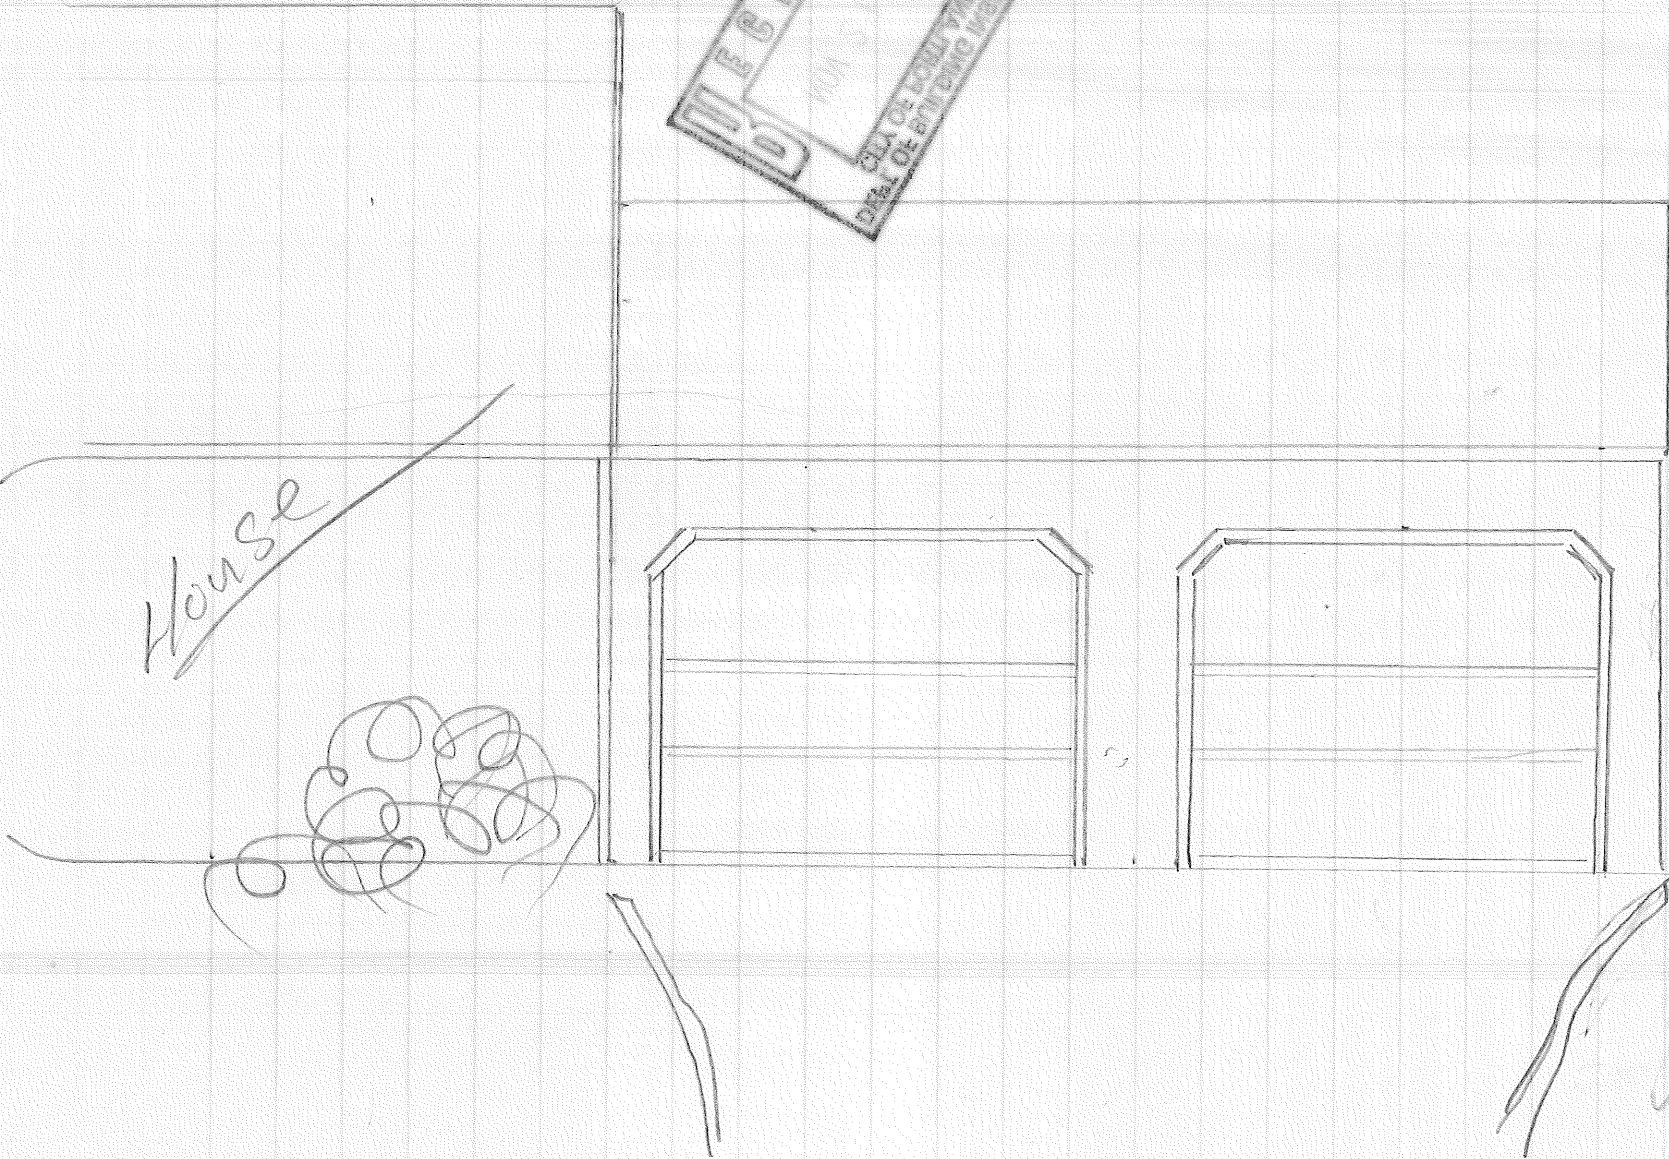


min
12'


per contractor

11/27/95


Dom slab Foundation

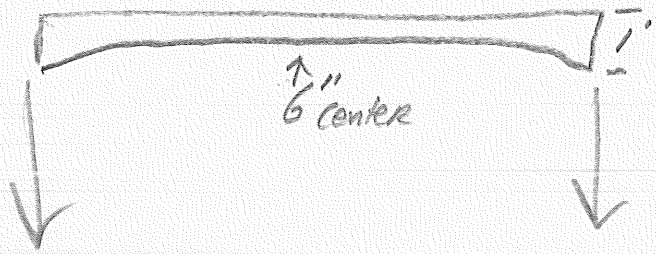

will be a frost wall
 4' below grade
 per contractor
 11/27/95



~~Existing House~~

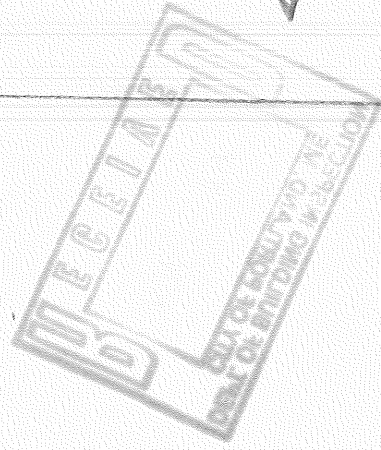


EXISTING Garage

New Garage

24

min
 -10
 per
 contra.
 cfo
 min
 -12'
 11/27/95

scale $\frac{1}{4}'' = 1'$

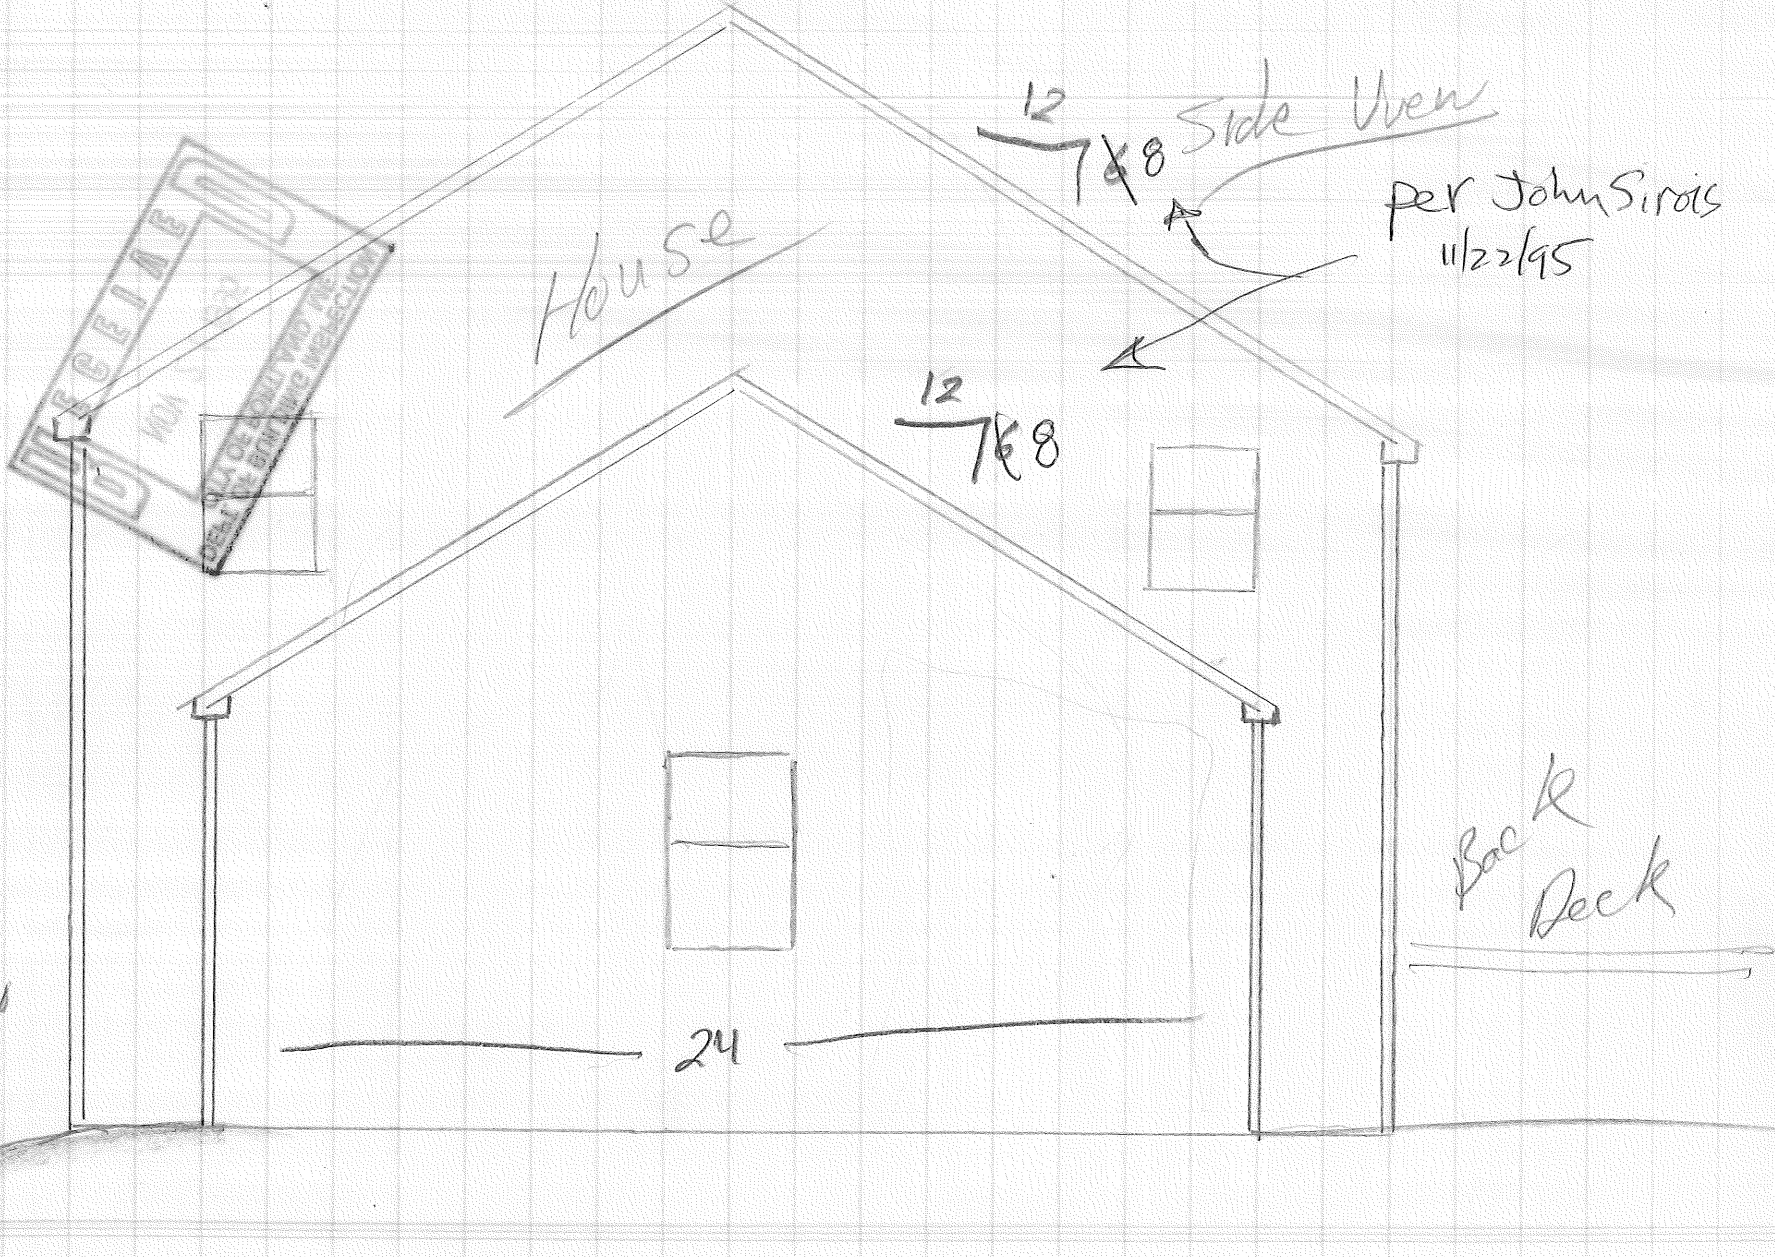

House

Side View

per John Sirais
11/22/95

Front
Driveway

Back
Deck

24

12
8

12
8