



REV.	DATE	STATUS
1	01-04-18	REVISION

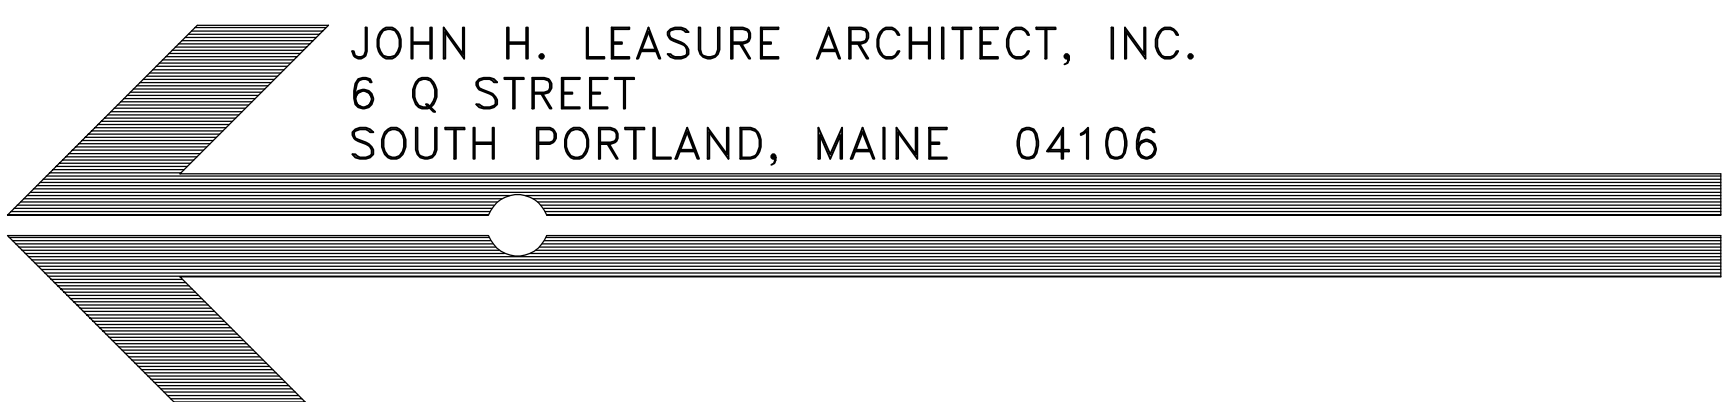

JOHN H. LEASURE ARCHITECT, INC.
6 Q STREET
SOUTH PORTLAND, MAINE 04106


MAINE LOBSTER NOW-INTERIOR FIT UP
58 CITY LINE DRIVE
PORTLAND, MAINE
DETAILS

A2

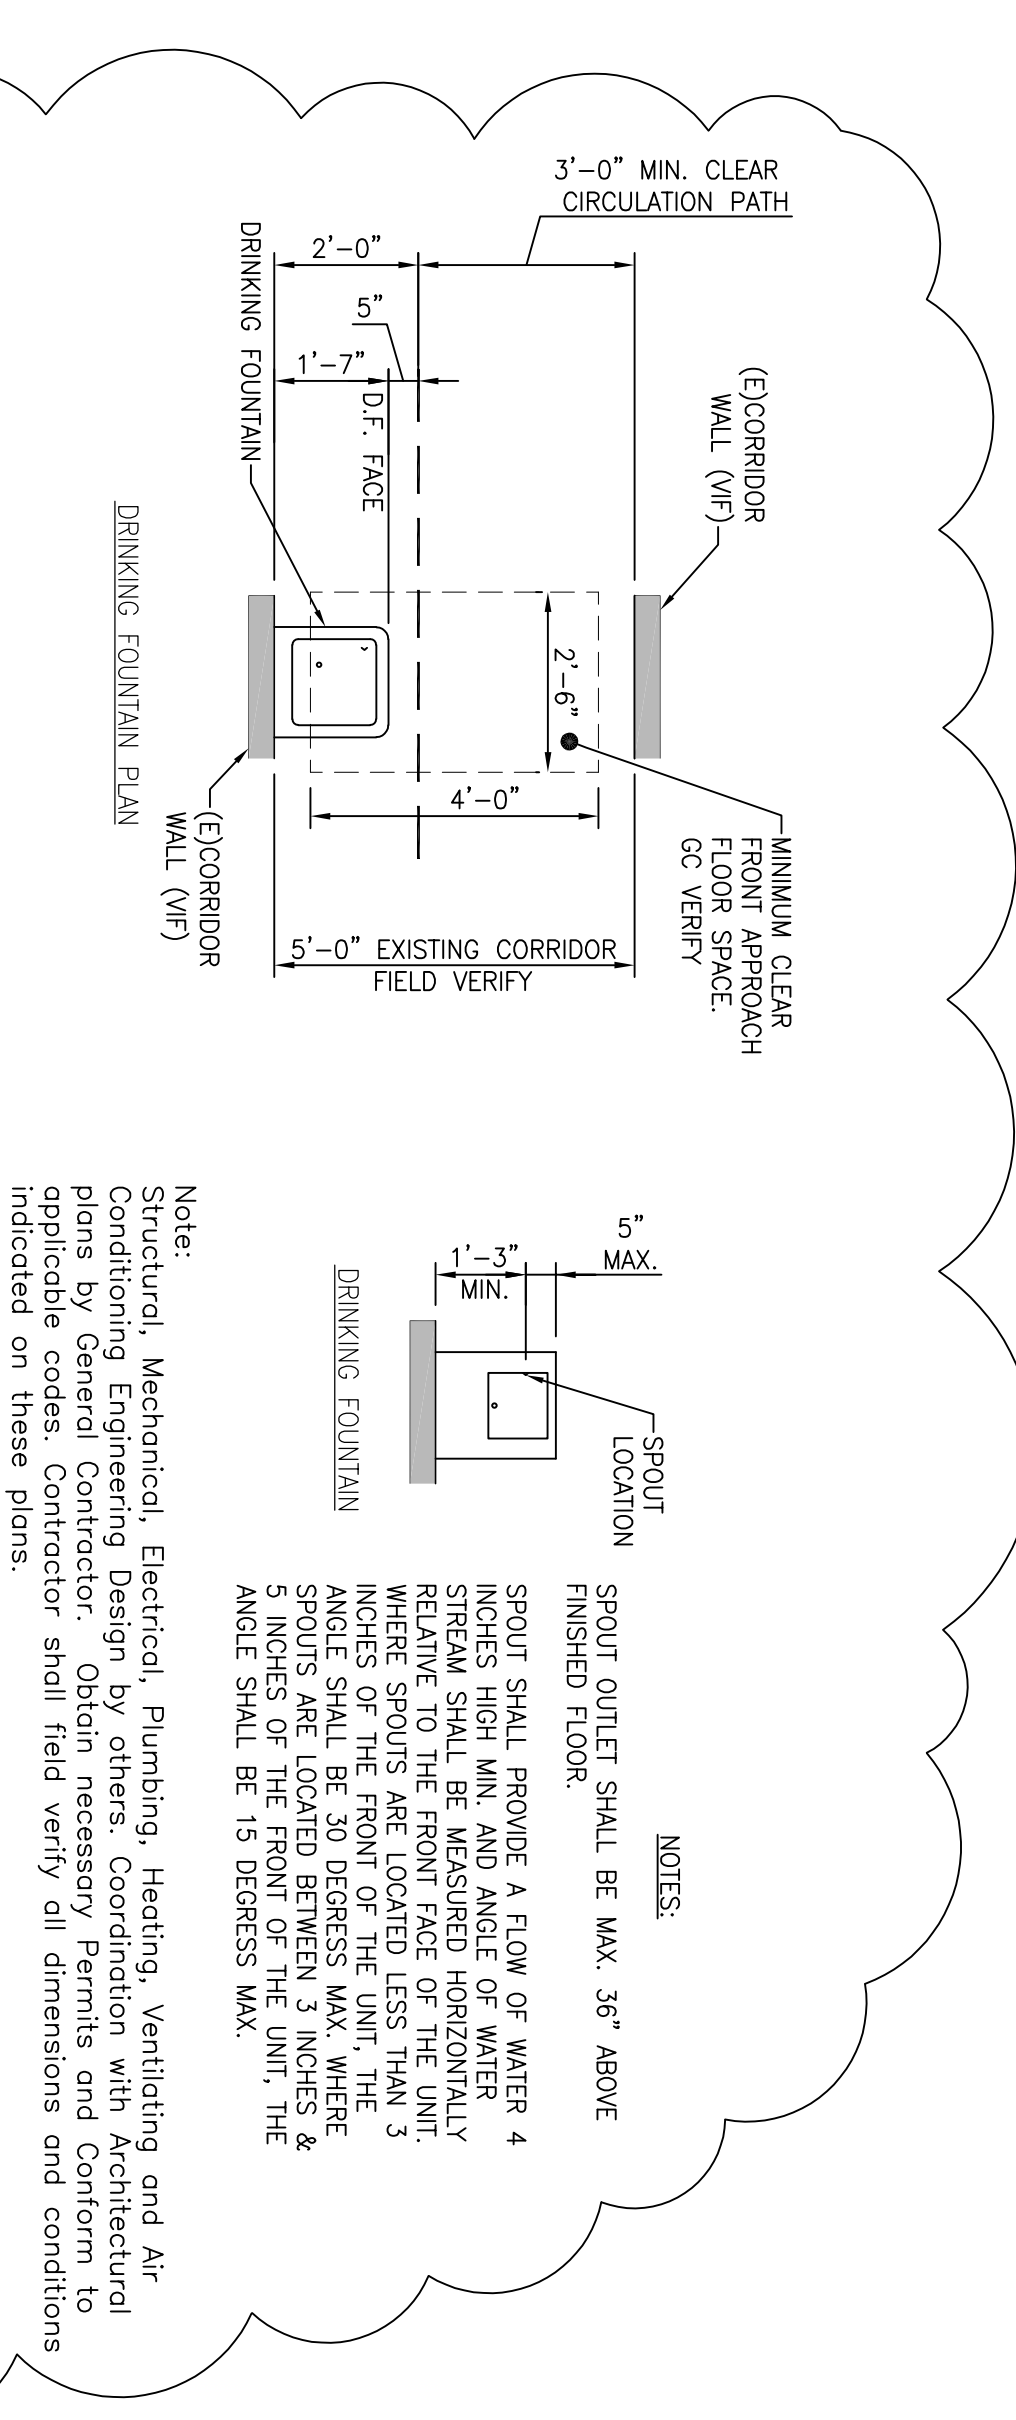

NOTES:
SPOUT OUTLET SHALL BE MAX. 36" ABOVE FINISHED FLOOR.
SPOUT SHALL PROVIDE A FLOW OF WATER 4 INCHES MINIMUM AND 10 INCHES MAXIMUM. STREAM SHALL BE MEASURED HORIZONTALLY RELATIVE TO THE FRONT FACE OF THE UNIT. WHERE SPOUTS ARE LOCATED LESS THAN 3 INCHES OF THE FRONT OF THE UNIT, THE ANGLE SHALL BE 30 DEGREES MAX. WHERE SPOUTS ARE LOCATED MORE THAN 3 INCHES OF THE FRONT OF THE UNIT, THE ANGLE SHALL BE 15 DEGREES MAX.

Note:
Structural, Mechanical, Electrical, Plumbing, Heating, Ventilating and Air Conditioning Engineering Design by others. Coordination with Architectural plans by General Contractor. Obtain necessary Permits and Conform to applicable codes. Contractor shall verify all dimensions and conditions indicated on these plans.

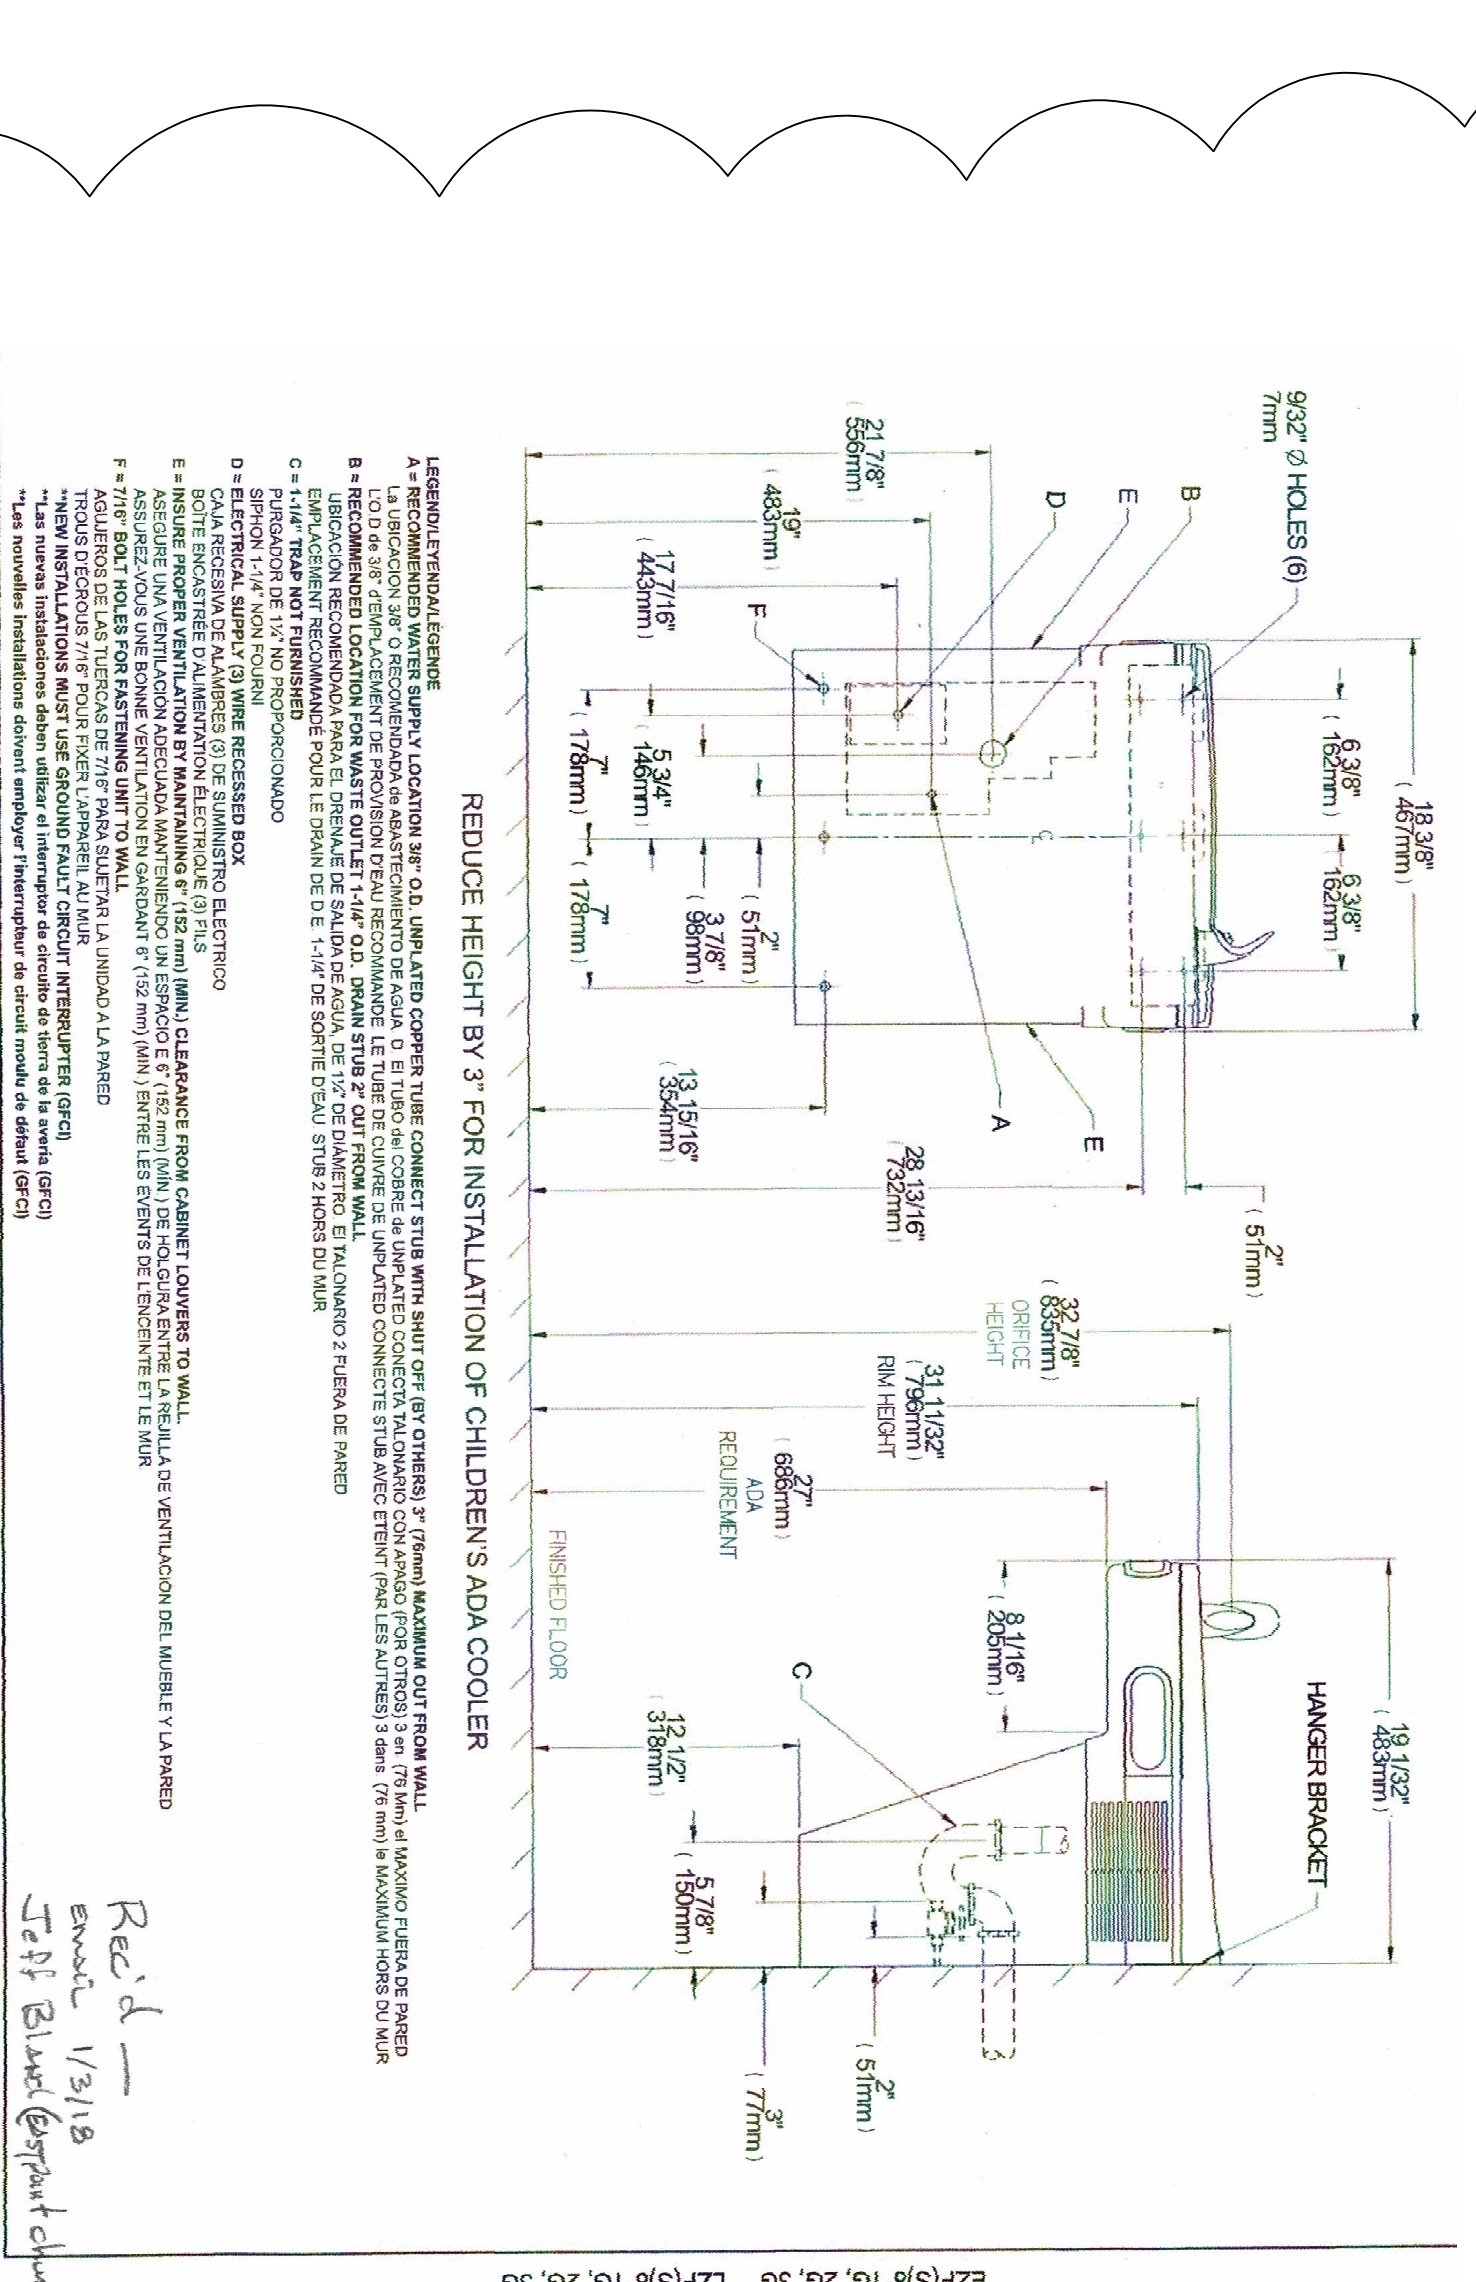

REDUCE HEIGHT BY 3" FOR INSTALLATION OF CHILDREN'S ADA COOLER

LEGEND SYMBOLS:
A. RECOMMENDED SPOT LOCATION FOR NEW UNIT. UNIT TO BE CONNECTED TO EXISTING WATER MAIN. UNIT TO BE CONNECTED TO EXISTING WATER MAIN. UNIT TO BE CONNECTED TO EXISTING WATER MAIN.
B. RECOMMENDED LOCATION FOR WALL MOUNTED UNIT. UNIT TO BE CONNECTED TO EXISTING WATER MAIN. UNIT TO BE CONNECTED TO EXISTING WATER MAIN.
C. RECOMMENDED LOCATION FOR WALL MOUNTED UNIT. UNIT TO BE CONNECTED TO EXISTING WATER MAIN. UNIT TO BE CONNECTED TO EXISTING WATER MAIN.
D. ELECTRICAL SYMBOLS TO BE USED.
E. RECOMMENDED LOCATION FOR WALL MOUNTED UNIT. UNIT TO BE CONNECTED TO EXISTING WATER MAIN. UNIT TO BE CONNECTED TO EXISTING WATER MAIN.
F. RECOMMENDED LOCATION FOR WALL MOUNTED UNIT. UNIT TO BE CONNECTED TO EXISTING WATER MAIN. UNIT TO BE CONNECTED TO EXISTING WATER MAIN.

DRINKING FOUNTAIN
Cut sheet Provided by Owner
52 CITY LINE DRIVE
Rec'd
Shade 1/31/18
Jeff Blaine (@spartanclub)

EZF(S)18 1G, 2G, 3G LZF(S)18 1G, 2G, 3G