

REFLECTED CEILING NOTES

1. FIRE SPRINKLERS SHALL BE LOCATED IN ALIGNMENT WITH OTHER CEILING ITEMS, TYPICALLY.
2. FIRE SPRINKLERS SHALL BE CENTERED IN CEILING TILE.
3. FIRE SPRINKLERS SHALL BE PLACED TO COORDINATE WITH LIGHT FIXTURE POSITIONS INDICATED.
4. ALIGN CEILING ITEMS AS SHOWN, WITH COMMON CENTERLINES, TYPICALLY. CENTER ITEMS IN CEILINGS, OR IN AREAS UNLESS INDICATED OTHERWISE.
5. REFER TO ROOM FINISH SCHEDULE FOR CEILING HEIGHTS AND CEILING FINISHES TO BE PROVIDED.
6. EXCEPT WHERE INDICATED, CENTER CEILING GRIDS IN ROOMS. USE HALF TILES OR GREATER @ PERIMETERS AS POSSIBLE.
7. PROVIDE ACCESS PANELS AS REQUIRED IN OMB CEILINGS FOR MECHANICAL, ELECTRICAL, AND COMMUNICATIONS MECHANICAL.

KEYED NOTES:

- 1 BOTTOM OF SOFFIT TO BE 3" LOWER THEN LOWEST ADJACENT CEILING AS SCHEDULED.
- 2 CURTAIN TRACK
- 3 PATIENT LIFT SYSTEM, NIC
- 4 IV TRACK


SYMBOL LEGEND

- 2-2 SUSPENDED CEILING PANEL AND GRID ASSEMBLY.
- 2-4 SUSPENDED CEILING PANEL AND GRID ASSEMBLY.
- 2-2 SUSPENDED ACT 5 ("WOOD LOOK") CEILING PANEL AND GRID ASSEMBLY.
- OMB CEILING.
- 2-4 LAY-IN LIGHT FIXTURE.
- 1-4 PENDANT LIGHT FIXTURE.
- DOWN LIGHT.
- CEILING MOUNTED EXIT LIGHT.
- RETURN AIR GRILLE.
- SUPPLY AIR GRILLE.
- EXHAUST AIR GRILLE.
- RADIANT CEILING PANEL, SEE MECH ACCESS PANEL.
- CEILING MOUNTED SMOKE DETECTOR.
- ACCESS PANEL - FINAL QUANTITIES, SIZES AND LOCATIONS TO BE DETERMINED IN FIELD.

REV.	ISSUED FOR CONSTRUCTION	DATE
0	ISSUED FOR CONSTRUCTION	9-12-08

ISSUED FOR CONSTRUCTION
9-12-08

CURRENT ISSUE STATUS:

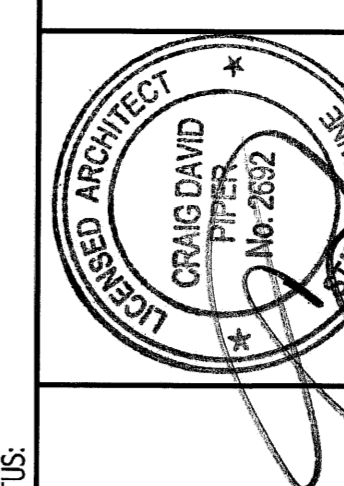

141 Fore Street, 5th Fl., Box 618
Portland, Maine 04104
Tel: (207) 773-8846
Fax: (207) 773-0770
www.smri.com



SMRI
MAINE MEDICAL CENTER - RICHARDS WING 2ND FLOOR
INPATIENT SERVICES
PORTLAND, MAINE

PARTIAL REFLECTED CEILING PLAN

SHEET TITLE:	DATE:	9-12-08
SCALE:	1/4" = 1'-0"	GRAPHIC SCALE:
PROJECT MANAGER:	CDP	MOR
JOB CAP/FURNISH:	CDP	SHEET No.:
A.E. OF RECORD:	AE103-08-103	CDP
SHRIT CAD FILE:	AE103-08-103	SHEET No.:
PROJECT No.:	08-103	AE103

PARTIAL REFLECTED CEILING PLAN

A1

1/4"=1'-0"