

LIGHTING FIXTURE SCHEDULE (CONTINUED)											
FIXTURE TYPE	MANUFACTURER AND CATALOG INFORMATION [REFER TO LIGHTING DESIGNER'S SPECS]	QTY.	LAMPS TYPE	WATTS	QTY.	BALLAST TYPE	WATTS	TOTAL WATTS	INPUT VOLTAGE	DESCRIPTION	MOUNTING
F29	NOT USED										
F30	MANUFACTURER: USA ILLUMINATION SERIES: SLVER LED ROUND; SR11 (OR APPROVED EQUAL BY TECH ELEMENT - ER2)	-	LED 3500K 975LUM/FT 80CRI	15W	1	LED DRIVER 0-10V 1% DIM	15W	15W	277V	1.75" RECESSED FIXED LED DOWNLIGHT WITH 1" REGRESSED BEVEL, 50DEG BEAM ANGLE, TO BE MOUNTED IN GRID CEILING.	CEILING GRID
F31	MANUFACTURER: USA ILLUMINATION SERIES: SLVER LED ROUND WW; SR51 (OR APPROVED EQUAL BY TECH ELEMENT - ER2)	-	LED 3500K 825LUM/FT 80CRI	15W	1	LED DRIVER 0-10V 1% DIM	15W	15W	277V	1.75" RECESSED FIXED LED WALLWASHER WITH 1" REGRESSED BEVEL, TO BE MOUNTED IN GRID CEILING.	CEILING GRID
F32	MANUFACTURER: LUMINI SERIES: LL36 ** LENGTHS VARY **	-	LED 3500K 253LUM/FT 95CRI	3W/ FT	1	LED DRIVER REMOTE 0-10V 1% DIM	3W/ FT	3W/ FT	277V	LINEAR LED TAPE LIGHT WITH SLIM WIDE 1.5 MOUNTING CHANNEL. PROVIDE LENGTHS REQUIRED TO COMPLETE FULL LENGTH RUN SHOWN ON PLANS.	CEILING
F33	MANUFACTURER: USA ILLUMINATION SERIES: SLVER LED ROUND; SR21 (OR APPROVED EQUAL BY TECH ELEMENT - ER2)	-	LED 3500K 80CRI	15W	1	LED DRIVER 0-10V 1% DIM	15W	15W	277V	1.75" RECESSED ADJUSTABLE LED DOWNLIGHT WITH 1" REGRESSED BEVEL, 25DEG BEAM ANGLE, TO BE MOUNTED IN GYP. CEILING.	CEILING GYP.
F34	MANUFACTURER: LUMENWERX SERIES: VIA 1.5; VIA1.SR ** LENGTHS VARY **	-	LED 3500K 500LUM/FT 80CRI	9.1W/ FT	AS REQ'D	LED DRIVER 0-10V 1% DIM	AS REQ'D	9.1W/ FT	277V	1.25" RECESSED LINEAR LED SLOT FIXTURE WITH ASYMMETRIC DISTRIBUTION.	CEILING GYP.
F35	MANUFACTURER: STOCKBILD SERIES: VERTICAL SCONCE	-	LED 3500K 231LUM/FT 90CRI	9W	1	LED DRIVER 24V/277V 0-10V 1% DIM	9W	9W	277V	32"H X 3.5"W LED DIMMABLE DECORATIVE WALL SCONCE.	WALL
F36	MANUFACTURER: ZUMTOBEL SERIES: ONDARA, ONDARLZL	-	LED 3500K 680LUM/FT 90CRI	75W	1	LED DRIVER 0-10V 1% DIM	75W	75W	277V	34"W ROUND DIMMABLE LED FIXTURE WITH 2% UPLIGHT COMPONENT.	CEILING
F37	MANUFACTURER: PINNACLE SERIES: EDGE 2; E2A ** LENGTHS VARY **	-	LED 3500K 625LUM/FT 80+CRI	8.6W/ FT	AS REQ'D	LED DRIVER 0-10V 1% DIM (STANDARD)	AS REQ'D	8.6W/ FT	277V	4"W DIRECT LINEAR LED FIXTURE. FLUSH LENS. PROVIDE SQUARE OR RECTANGLE SHAPE SHOWN ON PLANS WITH LIT CORNERS.	CEILING
F38	MANUFACTURER: TBD SERIES: TBD	-	LED 3000K 80CRI	---	---	---	---	40W MAX	120V	EXACT SPEC YET TO BE DETERMINED. VOLTAGE AND WATTAGE VALUES ASSUMED ONLY FOR COORDINATION.	SUSPENDED (REFER TO ARCH ELEV.)
X	MANUFACTURER: LITHONA LIGHTING SERIES: EDG & EDGR (OR APPROVED EQUAL)	-	LED 3500K 1500LUM/FT 85CRI	<5W/ FACE	1	LED DRIVER	<10W	<10W	277V	LED EDGE-LIT EXIT SIGN WITH GREEN LETTERS ON MIRRORRED BACKING. PROVIDE SINGLE OR DOUBLE FACE, AND ARROW, PER PLANS. WHERE A CEILING IS PRESENT PROVIDE RECESSED HOUSING. WHERE INSTALLED IN EXPOSED TO STRUCTURE AREA PROVIDE SURFACE MOUNT HOUSING.	VARIES
<p>LIGHT FIXTURE SCHEDULE NOTES:</p> <ol style="list-style-type: none"> ALL LIGHT FIXTURE SPECIFICATIONS ARE TO BE PROVIDED BY THE LIGHTING DESIGNER. SBLD STUDIO. THIS LIGHT FIXTURE SCHEDULE IS PROVIDED TO COORDINATE EXACT VOLTAGES, WATTAGES, AND ANY OTHER MISC INSTALLATION NOTES. REFER TO THE FIXTURE SPECIFICATIONS PROVIDED IN THE PROJECT MANUAL ISSUED WITH THE CONSTRUCTION DOCUMENT SET, PREPARED BY THE LIGHTING DESIGNER. ALL FIXTURE MANUFACTURER'S, LAMP TYPES, MODEL NUMBERS, ETC., WILL BE PROVIDED BY THE LIGHTING DESIGNER. ALL VOLTAGES, WATTAGES, AND CONTROL SCENARIOS OUTLINED IN THE ELECTRICAL SET OF DRAWINGS SHOULD BE CONSIDERED WHEN PURCHASING THE FIXTURES. ANY DISCREPANCIES BETWEEN THE SPECIFICATIONS IN THE LIGHTING DESIGNER SUBMITAL AND THESE DOCUMENTS SHALL BE BROUGHT TO THE ATTENTION OF THE DESIGN TEAM. ALL FINISH TYPES SHOULD BE COORDINATED WITH THE ARCHITECT/INTERIOR DESIGNER(S). ALL TRIMS AND INSTALLATION REQUIREMENTS SHALL BE COORDINATED WITH THE CEILING TYPE IN WHICH IT IS TO BE INSTALLED. REFER TO ARCHITECTURAL REFLECTED CEILING PLANS FOR EXACT CEILING TYPE FOR WHICH THE FIXTURE IS TO BE INSTALLED. ALL FLUORESCENT FIXTURES TO BE PROVIDED WITH INTERNAL BALLAST DISCONNECTING MEANS. <p>NOTES FOR OWNER DIRECT PROCUREMENT OF LIGHT FIXTURES:</p> <ol style="list-style-type: none"> ALL LIGHT FIXTURES, LAMPS, AND THE LUTRON DIMMING SYSTEM, INCLUSIVE OF ALL COMPONENTS ASSOCIATED WITH THE LUTRON DIMMING SYSTEM, ARE SUPPLIED BY OWNER AND FURNISHED BY WEDENBACH-BROWN. WEDENBACH-BROWN WILL PROVIDE A COMPLETE LUTRON BILL OF MATERIAL AS A PART OF THEIR SUBMITAL PACKAGE. WEDENBACH-BROWN WILL PROVIDE FOR THE COMMISSIONING OF THE LUTRON DIMMING SYSTEM, FOLLOWING THE EC'S COMPLETION OF ALL FIXTURES CHECK LIST. NO OTHER LIGHTING BIDS WILL BE REVIEWED OR ACCEPTED. ALL OTHER NON-LUTRON CONTROLS, DIMMING SWITCHES, SWITCHES, OCCUPANCY SENSORS, PHOTOCELLS, RELAYS, AND SIMILAR DEVICES THAT ARE NOT ASSOCIATED WITH THE LUTRON DIMMING SYSTEM ARE TO BE PROVIDED BY THE EC. THE WIRING AND INSTALLATION OF ALL FIXTURES AND DEVICES, INCLUDING THOSE PROVIDED BY THE OWNER ASSOCIATED WITH THE LUTRON DIMMING SYSTEM, SHALL BE BY THE EC. GC/EC MAINTAINS ALL STANDARD ELECTRICAL RESPONSIBILITY SUCH AS BUT NOT LIMITED TO INSTALLATION, INCLUDING ALL NECESSARY MOUNTING HARDWARE AS NORMALLY SUPPLIED AND REVIEW OF FIXTURE SUBMISSION FOR CEILING COORDINATION AND VOLTAGE. ALL STANDARD BACK BOXES THAT ARE INCLUDED AS A PART OF THE LIGHT FIXTURE PARTS WILL BE PROVIDED BY WEDENBACH-BROWN. WEDENBACH-BROWN WILL BE RESPONSIBLE FOR DETERMINING ALL QUANTITIES RELATED TO THE LIGHT FIXTURES, LAMPS, AND THE LUTRON DIMMING SYSTEM, AND SUPPLYING THOSE ITEMS IN THOSE QUANTITIES IN ACCORDANCE WITH THE PLANS AND SPECIFICATIONS. UPON AWARD, COUNTS FOR ALL MATERIAL WILL BE PROVIDED BY WEDENBACH-BROWN. EC WILL REVIEW THESE QUANTITIES AND REPORT ANY DISCREPANCIES FOUND. GC/EC IS RESPONSIBLE FOR CHECKING IN FIXTURES AS WELL AS CARE, CUSTODY AND SECURITY OF LIGHTING EQUIPMENT ONCE DELIVERED. CARE AND CUSTODY TRANSFER TO GC/EC AT TIME OF DELIVERY. ANY DAMAGES AT TIME OF DELIVERY NEEDS TO BE SIGNED FOR AS SUCH AND WEDENBACH-BROWN NEEDS TO BE NOTIFIED WITHIN 72 HOURS OF ANY DAMAGED PRODUCT. ANY FIXTURES OR DEVICES DAMAGED ON SITE WILL BE THE RESPONSIBILITY OF THE EC TO PAY FOR THE REPLACEMENT. ANY DAMAGE TO LIGHT FIXTURES FOUND TO OCCUR IN SHIPMENT, THAT IS NOT APPARENT AT THE TIME SHIPMENTS ARE RECEIVED, WILL BE REPORTED IMMEDIATELY SO THAT REPAIRS OR REPLACEMENTS CAN BE ARRANGED BY WEDENBACH-BROWN. A DELIVERY PLAN WILL BE COORDINATED BETWEEN THE GC/EC AND WEDENBACH-BROWN. THIS CAN INCLUDE PHASED DELIVERIES PROVIDING THE PHASING IS KNOWN PRIOR TO THE FIRST SHIPMENT. FIXTURES WILL COME PALLETIZED AND LABELED BY TYPE INCLUDING MANUFACTURER AND CATALOG NUMBER. EACH PALLET WILL INCLUDE ONLY ONE FIXTURE TYPE. IT IS THE EXPECTATION OF THE OWNER THAT THE GC/EC WILL WORK WITH THE WEDENBACH-BROWN TO MAKE THIS A SMOOTH AND SEAMLESS PROCESS. GC/EC SHALL BE RESPONSIBLE FOR ALL PUNCH LIST ITEMS ASSOCIATED WITH THE INSTALLATION OF LIGHT FIXTURES AND ASSOCIATED CONTROLS. ALL MATERIAL REQUIRED TO CORRECT PRODUCT DEFECTS RELATED TO THE LIGHT FIXTURES, LAMPS, AND THE LUTRON DIMMING SYSTEM WILL BE FURNISHED BY THE MANUFACTURER UNDER WARRANTY. ALL LABOR TO CORRECT PRODUCT DEFECTS RELATED TO THE LIGHT FIXTURES, LAMPS, AND THE LUTRON DIMMING SYSTEM WILL BE PROVIDED BY THE EC UNDER THEIR ONE YEAR PROJECT WARRANTY. 											

LIGHTING FIXTURE SCHEDULE											
FIXTURE TYPE	MANUFACTURER AND CATALOG INFORMATION [REFER TO LIGHTING DESIGNER'S SPECS]	QTY.	LAMPS TYPE	WATTS	QTY.	BALLAST TYPE	WATTS	TOTAL WATTS	INPUT VOLTAGE	DESCRIPTION	MOUNTING
F1-X	MANUFACTURER: PINNACLE SERIES: EDGE EVOLUTION 3 "X" DENOTES LENGTH VARIATION	-	LED 3500K 684LUM/FT 80+CRI	8.6W/ FT	AS REQ'D	LED DRIVER 0-10V 1% DIM (STANDARD)	AS REQ'D	2-17.2W 4-34.4W 6-51.6W 8-68.8W 10-86W 12-103.2W 16-137.6W 18-154.8W 20-172W 24-206.4W 28-223.6W	277V	4"W DIRECT LINEAR LED FIXTURE. REGRESSED LENS. VERIFY CEILING TYPE WITH ARCHITECTURAL RCP PLANS FOR PROPER MOUNTING.	CEILING
F2	MANUFACTURER: BARTCO SERIES: BSS840	-	LED 3500K 584LUM/FT 85CRI	7.4W/ FT	1	LED DRIVER 0-10V 1% DIM (STANDARD)	22.4W	22.2W	277V	3'-0" X 1-5/16"W SUSPENDED SINGLE RAIL LINEAR LED FIXTURE WITH DIFFUSE LENS. CABLE MOUNT. ZIPPER BOARD LED BOARD TYPE. PROVIDE WITH REMOTE DRIVER.	SUSPENDED (REFER TO ARCH ELEV.)
F2-6"	MANUFACTURER: BARTCO SERIES: BSS840	-	LED 3500K 584LUM/FT 85CRI	7.4W/ FT	1	LED DRIVER 0-10V 1% DIM (STANDARD)	44.4W	44.2W	277V	6'-0" X 1-5/16"W SUSPENDED SINGLE RAIL LINEAR LED FIXTURE WITH DIFFUSE LENS. CABLE MOUNT. ZIPPER BOARD LED BOARD TYPE. PROVIDE WITH REMOTE DRIVER.	SUSPENDED (REFER TO ARCH ELEV.)
F2A-S	MANUFACTURER: BARTCO SERIES: BSS840	-	LED 3500K 584LUM/FT 85CRI	7.4W/ FT	1	LED DRIVER 0-10V 1% DIM (STANDARD)	22.4W	22.2W	277V	SAME AS TYPE "F2" EXCEPT WITH CEILING SUPPORT CLIP FOR SURFACE MOUNTING TO CEILING GRID. PROVIDE WITH REMOTE DRIVER.	SURFACE CEILING
F3	MANUFACTURER: PINNACLE SERIES: EVOLUTION OUTLINE ** LENGTHS VARY **	-	LED 3500K 398LUM/FT 80CRI	6W/ FT	AS REQ'D	LED DRIVER 0-10V 1% DIM (STANDARD)	AS REQ'D	6W/ FT	277V	4.5"W RECESSED LINEAR LED PERIMETER SLOT FIXTURE WITH REGRESSED LENS. PROVIDE AS FLANGLESS.	CEILING RECESS
F3A	MANUFACTURER: PINNACLE SERIES: EVOLUTION OUTLINE ** LENGTHS VARY **	-	LED 3500K 398LUM/FT 80CRI	6W/ FT	AS REQ'D	LED DRIVER 0-10V 1% DIM (STANDARD)	AS REQ'D	6W/ FT	277V	SAME AS TYPE "F3" EXCEPT TO BE MOUNTED IN GRID CEILING WITH ACT TRIM.	CEILING RECESS
F3B	MANUFACTURER: PINNACLE SERIES: EVOLUTION OUTLINE ** LENGTHS VARY **	-	LED 3500K 398LUM/FT 80CRI	6W/ FT	AS REQ'D	LED DRIVER 0-10V 1% DIM (STANDARD)	AS REQ'D	6W/ FT	277V	SAME AS TYPE "F3" EXCEPT TO BE MOUNTED IN GYP CEILING WITH SPACKLE FLANGE.	CEILING RECESS
F4	NOT USED										
F5	MANUFACTURER: BUZZI SERIES: BUZZIBELL	-	LED 3000K 2545LUM/FT 80CRI	29.4W	1	LED DRIVER 1-10V DIMMING (STANDARD)	29.4W	29.4W	120V	23.62" DIA X 23.62" H SUSPENDED DECORATIVE PENDANT FIXTURE. EXACT FABRIC AND FINISH TO BE SELECTED BY THE ARCHITECT.	SUSPENDED (REFER TO ARCH ELEV.)
F6	MANUFACTURER: LIGHTYEARS SERIES: CARAVAGGIO	1	INCANDESCENT TYPE A E26	100W	-	-----	-----	100W	120V	15.75" RND SUSPENDED DECORATIVE PENDANT FIXTURE. EXACT FINISH TO BE SELECTED BY THE ARCHITECT.	SUSPENDED (REFER TO ARCH ELEV.)
F7	MANUFACTURER: ROLL & HILL SERIES: BLUFF CITY 148N	1	INCANDESCENT 2700K 550LUM/FT 19	60W	-	-----	-----	60W MAX	120V	14" RND SUSPENDED DECORATIVE PENDANT FIXTURE. EXACT FINISH TO BE SELECTED BY THE ARCHITECT. ELV DIMMING.	SUSPENDED (REFER TO ARCH ELEV.)
F8	MANUFACTURER: PRESCOLITE LIGHTING SERIES: LC6LED	-	LED 3500K 1000LUM/FT 80CRI	17.1W	1	LED DRIVER 0-10V 10% DIM (STANDARD)	25W	25W	277V	6"W RECESSED ROUND LED OPEN DOWNLIGHT FIXTURE. EXACT TRIM COLOR AND REFLECTOR FINISH TO BE SELECTED BY THE ARCHITECT. SUITABLE FOR WET LOCATIONS.	CEILING
F9	MANUFACTURER: MERCURY LIGHTING SERIES: LW4 (OR APPROVED EQUAL BY LAMAR OR PHILIPS) ** LENGTHS VARY **	-	LED 3500K 926LUM/FT 80CRI	8W/ FT	1	LED DRIVER 0-10V 1% DIM (STANDARD)	25W	25W	277V	ARCHITECTURAL LINEAR LED FIXTURE WITH HIGH TRANSMISSION ACRYLIC LENS.	BACKLIT CEILING
F10	MANUFACTURER: PINNACLE LIGHTING SERIES: EDGE EX2N ** LENGTHS VARY **	-	LED 3500K 973LUM/FT 80CRI	8.6W/ FT	AS REQ'D	LED DRIVER 0-10V 1% DIM (STANDARD)	AS REQ'D	8.6W/ FT	277V	3"W LINEAR LED INDIRECT WALL MOUNT FIXTURE.	WALL (REFER TO ARCH ELEV.)
F11	MANUFACTURER: PINNACLE SERIES: EVOLUTION OUTLINE ** LENGTHS VARY **	-	LED 3500K 398LUM/FT 80CRI	6W/ FT	AS REQ'D	LED DRIVER 0-10V 1% DIM (STANDARD)	AS REQ'D	6W/ FT	277V	2"W RECESSED LINEAR LED PERIMETER SLOT FIXTURE WITH REGRESSED LENS.	CEILING RECESS
F12	MANUFACTURER: PINNACLE LIGHTING SERIES: EDGE EX2 ** LENGTHS VARY **	-	LED 3500K 625LUM/FT 80CRI	8.6W/ FT	AS REQ'D	LED DRIVER 0-10V 1% DIM (STANDARD)	AS REQ'D	8.6W/ FT	277V	2"W LINEAR LED DIRECT WALL MOUNT FIXTURE WITH SATINE LENS. PROVIDE WITH RECTANGULAR PATTERN SHAPE.	WALL (REFER TO ARCH ELEV.)
F13	MANUFACTURER: PHILIPS DAY-BRITE SERIES: FLUXGRID LED 2X4 (OR APPROVED EQUAL BY PINNACLE)	-	LED 3500K 3616LUM/FT 80CRI	31.8W	1	LED DRIVER 0-10V 1% DIM (STANDARD)	32.1W	32.1W	277V	2'X4" RECESSED GRID LED TROFFER. PROVIDE WITH CENTER SMOOTH DIFFUSER.	CEILING
F14	MANUFACTURER: PINNACLE SERIES: EDGE EVOLUTION 2 ** LENGTHS VARY **	-	LED 3500K 625LUM/FT 80+CRI	8.6W/ FT	AS REQ'D	LED DRIVER 0-10V 1% DIM (STANDARD)	AS REQ'D	8.6W/ FT	277V	4"W DIRECT LINEAR LED FIXTURE. FLUSH LENS. VERIFY CEILING TYPE WITH ARCHITECTURAL RCP PLANS FOR PROPER MOUNTING.	CEILING
F15	MANUFACTURER: PHILIPS DAY-BRITE SERIES: FLUXGRID LED 2X2 (OR APPROVED EQUAL BY PINNACLE)	-	LED 3500K 3674LUM/FT 80CRI	33.4W	1	LED DRIVER 0-10V 1% DIM (STANDARD)	33.4W	33.4W	277V	2'X2" RECESSED GRID LED TROFFER. PROVIDE WITH CENTER SMOOTH DIFFUSER.	CEILING
F16	MANUFACTURER: PHILIPS DAY-BRITE SERIES: LINC LED UNDERCABINET ** LENGTHS VARY **	-	LED 3500K 210LUM/FT 90CRI	3.12W/ FT	1	LED DRIVER ELV TRAILING EDGE	3.12W/ FT	3.12W/ FT	277V	LED UNDERCABINET FIXTURE. PROVIDE LENGTHS REQUIRED TO COMPLETE FULL LENGTH RUN SHOWN ON PLANS.	UNDERCABINET
F17	MANUFACTURER: LUMINI SERIES: LL36 ** LENGTHS VARY **	-	LED 3500K 253LUM/FT 95CRI	3W/ FT	1	LED DRIVER REMOTE 0-10V 1% DIM	3W/ FT	3W/ FT	277V	LINEAR LED TAPE LIGHT WITH SLIM WIDE 1.5 MOUNTING CHANNEL. PROVIDE LENGTHS REQUIRED TO COMPLETE FULL LENGTH RUN SHOWN ON PLANS.	UNDER STAR
F18	MANUFACTURER: PRESCOLITE LIGHTING SERIES: LC6SL	-	LED 3500K 1000LUM/FT 80CRI	13.4W	1	LED DRIVER 0-10V 10% DIM	13.4W	13.4W	277V	6"W RECESSED ROUND LED OPEN WALLWASH FIXTURE. EXACT TRIM COLOR AND REFLECTOR FINISH TO BE SELECTED BY THE ARCHITECT.	CEILING
F19	MANUFACTURER: MERCURY LIGHTING SERIES: LW4 (OR APPROVED EQUAL BY LAMAR OR PHILIPS)	-	LED 3500K 600LUM/FT 80CRI	8W/ FT	1	LED DRIVER 0-10V 10% DIM (STANDARD)	32W	32W	277V	4'-0" STAIRWELL REPLACEMENT LIGHT.	SURFACE
F19A	MANUFACTURER: MERCURY LIGHTING SERIES: LW4 (OR APPROVED EQUAL BY LAMAR OR PHILIPS)	-	LED 3500K 600LUM/FT 80CRI	8W/ FT	1	LED DRIVER 0-10V 10% DIM (STANDARD)	16W	16W	277V	2'-0" STAIRWELL REPLACEMENT LIGHT.	SURFACE
F20	MANUFACTURER: REGGIAN LIGHTING SERIES: TRYBECA ROUND, ABXUEK.WN	-	LED 3500K 2443LUM/FT 85CRI	24W	1	LED DRIVER 0-10V DIMMING	24W	24W	277V	5.9" RECESSED LED DOWNLIGHT WITH 1" DROP LENS.	CEILING
F21	MANUFACTURER: PRUDENTIAL LIGHTING SERIES: P43 ** LENGTHS VARY **	-	LED 3500K 450LUM/FT 80CRI	4.5W/ FT	1	LED DRIVER 0-10V 1% DIM (STANDARD)	4.5W/ FT	4.5W/ FT	277V	4"W RECESSED LINEAR SLOT LED FIXTURE WITH ACRYLIC LENS.	CEILING
F22	MANUFACTURER: LUMENWERX LIGHTING SERIES: VIA 3 PERMETER ** LENGTHS VARY **	-	LED 3500K 500LUM/FT 80CRI	5W/ FT	1	LED DRIVER 0-10V 1% DIM	5W/ FT	5W/ FT	277V	3"W RECESSED LINEAR SLOT ASYMMETRIC LED FIXTURE WITH ACRYLIC LENS.	CEILING
F23	MANUFACTURER: SONNEMAN LIGHTING SERIES: STILETTO 24	-	LED 3500K 840LUM/FT 90CRI	24W	1	LED DRIVER ELV DIMMING	10W	10W	120V	23.75" H X 5" W X LED DIMMABLE DECORATIVE WALL SCONCE.	WALL
F24	MANUFACTURER: TEMPO ARCHITECTURAL SERIES: CAS; SERPENTINE LED LINEAR COVE ** LENGTHS VARY **	-	LED 3500K 420LUM/FT 80CRI	4.8W/ FT	1	LED DRIVER 12V/277V 0-10V DIMMING	4.8W/ FT	4.8W/ FT	277V	1.4" LINEAR SYMMETRIC LED COVE FIXTURE. PROVIDE FULL LENGTH RUN SHOWN ON PLANS.	COVE
F25	MANUFACTURER: ELEMENT BY TECH LIGHTING SERIES: REFLECTIONS, EDH	-	LED 3500K 198LUM/FT 80CRI	30.8W	1	LED DRIVER 0-10V DIMMING	30.8W	30.8W	277V	12" RECESSED ROUND LED INDIRECT DOWNLIGHT WITH 1" DROP LENS.	CEILING
F26	MANUFACTURER: EL TORRENT SERIES: SU.037 (OR APPROVED EQUAL BY GLOBAL LIGHTING B.LUX, DESIGN PLAN TIMBER RND, OR BECODE DIPPER)	3	LED 3000K 80CRI	12W	-	-----	-----	40W MAX	120V	~18" RND SUSPENDED DECORATIVE PENDANT FIXTURE. EXACT FINISH TO BE SELECTED BY THE ARCHITECT.	SUSPENDED (REFER TO ARCH ELEV.)
F27	MANUFACTURER: EL TORRENT SERIES: SO.512-DIM (OR APPROVED EQUAL BY GLOBAL LIGHTING B.LUX, DESIGN PLAN TIMBER, OR HOLLIS+MORRIS BENNINGTON)	4	LED 3000K 80CRI	12W	-	DIMMING TYPE TO BE VERIFIED	-----	165W MAX	120V	(2) OF 3'-0" X 10" RECTANGULAR SUSPENDED DECORATIVE PENDANT FIXTURE. END TO END. EXACT FINISH TO BE SELECTED BY THE ARCHITECT.	SUSPENDED (REFER TO ARCH ELEV.)
F28	MANUFACTURER: RETROFIT EXISTING HEADS SERIES: BRUCK LED/MR16 OPTIONS TBD	1	LED/MR16 3000K 80CRI	XW	#	REPLACE EXISTING DRIVER(S)	---	20W MAX	120V EX. CKT	EXISTING SUSPENDED TWO TIER CONCENTRIC ROUND TRACK WITH HEADS TO BE RETROFITTED WITH NEW HEADS AND POWER SUPPLIES.	SUSPENDED (REFER TO ARCH ELEV.)



2211 Congress Street
Portland, ME 04122

Gensler


214 North Tryon Street
Suite 2320
Charlotte, NC 28202
United States



Jeffery Scott Lowery, P.E.
420 Market Lane
Charlotte, NC 28217
Tel: 704.387.9333
MEP-JOB# 170358

Date Description
12/15/2017 ISSUE FOR PERMIT AND CONSTRUCTION

Seal / Signature

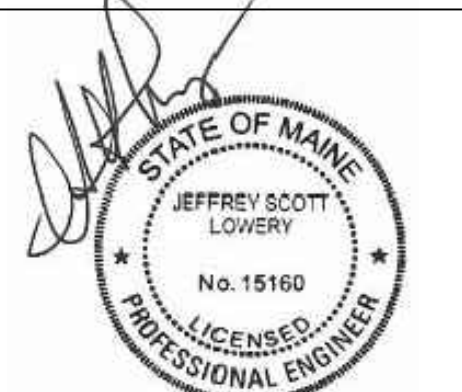

Project Name 12/15/17

Unum Workplace Transformation
- Phase 2 & 3 (HO2 & HO3)

Project Number

59.6481.003

Description
LIGHT FIXTURE SCHEDULE

Scale
NO SCALE

E0.004