


ALTERNATE #1:

1. PROVIDE VCT(STANDARD EXCELON, IMPERIAL TEXTURE 12"x12" TILES) AT CORRIDOR DC-B-NM2/DC-B-NM1, STRETCHER HOLDING B329, CONTROL B332/336. COLORS AND PATTERN TO BE SIMILAR TO RUBBER SHOWN.

FINISH NOTES:




1. REFER TO FINISH PLAN (THIS SHEET) FOR LAYOUT OF FLOOR FINISH MATERIALS. REFER TO ROOM FINISH SCHEDULE (AE601) FOR ACTUAL MATERIALS USED.
2. ALL NEW FLOORING MATERIALS TO RUN BENEATH CASEWORK, UNLESS NOTED OTHERWISE.
3. PROVIDE ADA COMPLIANT, RESILIENT, RUBBER FLOOR TRANSITIONS AT ALL REQUIRED LOCATIONS.

FLOOR FINISH LEGEND:

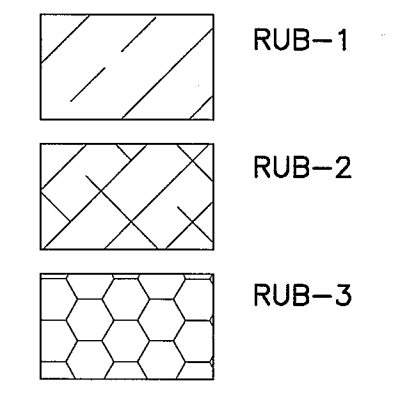

144 Fore Street/P.O. Box 618
Portland, Maine 04104
tel. (207) 772-3846
fax. (207) 772-3070
www.smrinc.com

ARCHITECTURE
ENGINEERING
PLANNING
INTERIOR DESIGN
COMMISSIONING

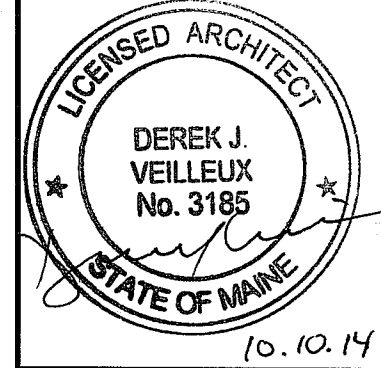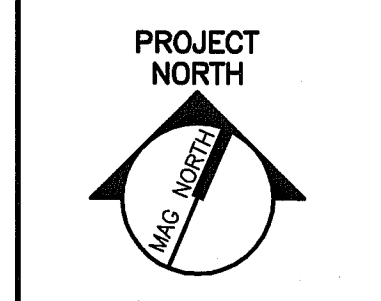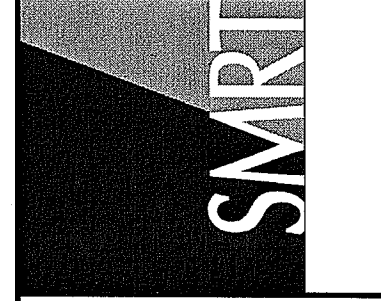

**MAINE MEDICAL CENTER
NUCLEAR MEDICINE RENOVATIONS - PHASE 2**
PORTLAND, MAINE
**ISSUED FOR CONSTRUCTION
10-10-14**

REV	DESCRIPTION	DATE
0	ISSUED FOR CONSTRUCTION	10-10-14

GRAPHIC SCALE:
0" 1"

SCALE: 1/4"=1'-0"
PROJECT MANAGER: DJV
JC/DRAWN BY: MDR/JWK
A/E OF RECORD: DJV
CAD FILE: AF101-14113
PROJECT NO: 14113
DATE: 10-10-14

SHEET TITLE:
**ARCHITECTURAL
FINISHES PLAN**

SHEET No.
AF101
© COPYRIGHT 2013 SMRT INC.