

NOTES:




- SEE SHEET E-001 FOR LEGEND AND GENERAL NOTES.
- EXTEND EXISTING ADDRESSABLE FIRE ALARM SYSTEM TO NEW NOTIFICATION DEVICES. PROVIDE ALL CONDUIT, WIRING, BOXES, DEVICES, PROGRAMMING, POWER SUPPLIES AND EQUIPMENT REQUIRED TO MAINTAIN A COMPLETE AND OPERABLE FIRE ALARM SYSTEM.

KEYED NOTES:

- RELOCATED SMOKE DETECTOR SEE ED100 FOR CURRENT DEVICE LOCATION. EXTEND EXISTING WIRING AS REQUIRED TO ACCOMMODATE NEW DEVICE LOCATIONS.
- AFTER NEW DRYWALL IS INSTALLED RE-INSTALL EXISTING COVER PLATES FOR EXISTING TELECOMMUNICATIONS OUTLETS.
- AFTER OUTLET BOX IS EXTENDED OR RELOCATED IN NEW WALL RE-INSTALL EXISTING COVER PLATES FOR EXISTING TELECOMMUNICATIONS OUTLETS.
- MOUNT VOICE/DATA OUTLET AT 60" AF FOR WALL MOUNTED MONITOR.

144 Fore Street/P.O. Box 618
 Portland, Maine 04104
 tel. (207) 772-3846
 fax. (207) 772-1070
 www.smrinc.com

ARCHITECTURE
 ENGINEERING
 PLANNING
 INTERIOR DESIGN
 COMMISSIONING

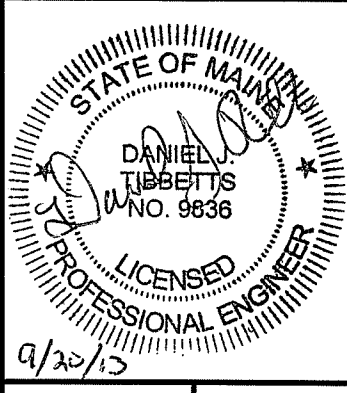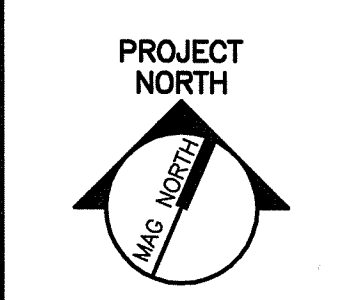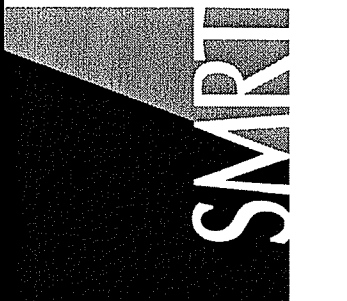

MAINE MEDICAL CENTER
 MRI #1 AND READING ROOM RENOVATION
 PORTLAND, MAINE
 ISSUED FOR CONSTRUCTION
 9-20-13
 CURRENT ISSUE STATUS:

REV	DESCRIPTION	DATE
0	ISSUED FOR CONSTRUCTION	9-20-13

GRAPHIC SCALE:
 0" 1"
 SCALE: 1/4"=1'-0"
 PROJECT MANAGER: DJV
 JC/DRAWN BY: CDS
 A/E OF RECORD: DJT
 CAD FILE: EY100-12118
 PROJECT NO: 12118
 DATE: 9-20-13
 SHEET TITLE:

SYSTEMS PLAN

A1 PLAN
 1/4"=1'-0"

SHEET No.
EY100
 © COPYRIGHT 2013 SMART INC.