Location of Construction:	Owner: Phone:		940818		
Owner Address: 04102	Leasee/Buyer's Name:	Phone:	Busines	sName:	Kary Gresik
Contractor Name:	Address:	Phor	e:		Permit Issued: TISSUED
Past Use:	Proposed Use:	COST OF WOR		PERMIT FEE: \$ 30.00	AUG - 8 1994
		FIRE DEPT.		INSPECTION:	
	w/Inlaw Apt	Signature:	☐ Denied	Use Group: Type: Signature:	Zone: CBL: PORILAN 217-A-012
Proposed Project Description:		PEDESTRIAN ACTIVITIES DISTRICT (P.U.D.)			Zoning Approval:
Change use/Int Reno/Ext Reno		Action: Approved		☐ Shoreland	
. This permit application doesn't preclude the Applicant(s) from meeting applicable State and Federal rules.		☐ Site Plan maj ☐ minor ☐ mm ☐			
3. Building permits are void if work is not startion may invalidate a building permit and a conditional Use Board I hereby certify that I am the owner of record of	stop all work d of Appeals \$50.00 CERTIFICATION	7/14/94 PERMI WITH REC	PERMIT IN REQUIREMENT ISSUE		☐ Miscellaneous ☐ Conditional Use ☐ Interpretation ☐ Approved ☐ Denied Historic Preservation ☐ Not in District or Landmark ☐ Does Not Require Review ☐ Requires Review ☐ Requires Review ☐ Approved ☐ Approved ☐ Approved with Conditions
authorized by the owner to make this application if a permit for work described in the application areas covered by such permit at any reasonable	on as his authorized agent and I agree in issued, I certify that the code offici	to conform to all applicab al's authorized representat	e laws of the	iis jurisdiction. In addition	n, □ Denied
DIGINALURE OF AFFLICANT	ADDKESS:	DAIE.		THUNE,	
					경기 그 불다 있는 그 같아 하는 학생들은 경기 때문에 가장 하는 것 같아 그는 그 그 없었다.

COMMENTS

Pone Wo	out Juspi
	Inspection Record Type Date
	Framing:
	Framing: Plumbing:
	Final:
	Other:

BUILDING PERMIT REPORT

1857
Address 7895 Congress ST. Date 8/4-14/94
Reason for Permit Charge of USE / MAKE renova TIVAS
Bldg.Owner: Rosenberg
Contractor: Uwner
Permit Applicant: /,'
Approval: * 7 * 9 * 10 . * 12 * 13 * 14
CONDITION OF APPROVAL:


- 1. Before concrete for foundation is placed, approvals from Public Works and Inspection Services must be obtained. (A 24 hour notice is required prior to inspection).
- 2. Precaution must be taken to protect concrete from freezing.
- 3. It is strongly recommended that a register land surveyor check all foundation forms before concrete is placed. This is done to verify that the proper setbacks are maintained.
- 4. All vertical openings shall be enclosed with construction having a fire rating of at least one (1) hr., including fire doors with selfclosers.
- 5. Each apartment shall have access to (2) separate, remote and approved means of egress. A single exit is acceptable when it exits directly from the apartment to the building exterior with no communications to other apartment units.
- 6. The boiler shall be protected by enclosing with one (1) hour fire rated construction including fire doors and ceiling, or by providing automatic extinguishment. Sprinkler piping serving not more than six sprinklers may be connected to a domestic water supply system having a capacity sufficient to provide 0.15 gallons per minute, per square foot of floor throughout the entire area. An INDICATING shut-off valve shall be installed in an accessible locations between the sprinkler and the connection to the domestic water supply. Minimum pipe size shall be 3/4 inch copper or 1 inch steel. Maximum coverage area of a residential sprinkler is 144 square feet per sprinkler.
- 7. Every sleeping room below the fourth story in buildings of Use Groups R and I-1 shall have at least one operable window or exterior door approved for emergency egress or rescue. The units must be operable from the inside opening without the use of special knowledge or separate tools. Where windows are provided as a means of egress or rescue, they shall have a sill height not more than 44 inches (1118 mm) above the floor. All egress or rescue windows from sleeping room must have minimum net clear opening height dimension shall be 24 inches (610 mm). The minimum net clear opening width dimension shall be 20 inches (508 mm), and a minimum net clear opening of 5.7 sq.ft.

- 8. All single and multiple station smoke detectors shall be of an approved type and shall be installed in accordance with the provisions of the building code 919.3.2 (BOCA National Building Code 1993), and NFFA 101 Chapter 18 & 19. (smoke detectors shall be installed and maintained at the following locations):
 - 1. In the immediate vicinity of bedrooms
 - 2. In all bedrooms
 - 3. In each story within a dwelling unit, including basements
 - 9. Private garages located beneath habitable rooms in occupancies in Use Group R-1, R-2, R-3 or I-1 shall be separated from adjacent interior spaces by Fire Partitions and floor/ceiling assembly; lies which are constructed with not less than 1-hour fire resisting rating. Private garages attached side-by-side to rooms in the above occupancies shall be completely separated from the interior spaces and the attic area by means of 1/2 inch gypsum board or the equivalent applied to the garage side. (Chapter 4 section 407.0 of the BOCA/1993).
- 10. Guardrails & Handrails A guardrail system is a system of building components located near the open sides of elevated walking surfaces for the purpose of minimizing the possibility of an accidental fall from the walking surface to the lower level. Minimum height all Use Group 42", except Use Group R which is 36". In occupancies in Use Group A, B, H-4, II, I-2 M and R and public garages and open parking structures, open guards shall have balusters or be of solid material such that a sphere with a diameter of 4" cannot pass through any opening. Guards shall not have an ornamental pattern that would provide a ladder effect.
 - 11. All exit signs, lights and means of egress lighting shall be done in accordance with Chapter 10, section & subsections 1023. § 1024.0 of the City's building code (The BOCA National Building Code/1993).
- 12. Stair construction in Use Group R-3, R-4 is a minimum of 9" tread and 8-1/4" maximum rise.
- / 13. Headroom in habitable space is a minimum of 7'6".
- 14. The minimum headroom in all parts of a stairway shall not be less than 80 inches.
 - 15. All construction and demolition debris must be disposed at the City's authorized reclamation site. The fee rate is attached. Proof of such disposal must be furnished to the office of Inspection Services before final certificate or occupancy is issued or demolition permit is granted.
 - 16. Section 25-135 of the Municipal Code for the City of Portland states: "No person or utility shall be granted a permit to excavate or open any street or sidewalk from the time of November 15 of each year to April 15 of the following year".
 - 17. The builder of a facility to which Section 4594-C of the Maine State Human Rights Act, Title 5 MRSA refers, shall obtain a certification from a design professional that the plans of the facility meet the standards of construction required by this section. Prior to commencing construction of the facility, the builder shall submit the certification to the Division of Inspection Services.

4. Samuel Hoffses Chief of Inspections

/dmm 01/14/94(redo w/additions)

Robert Kelly-Rosenberg 1859 Congress St Portland, ME 04102 172-5527

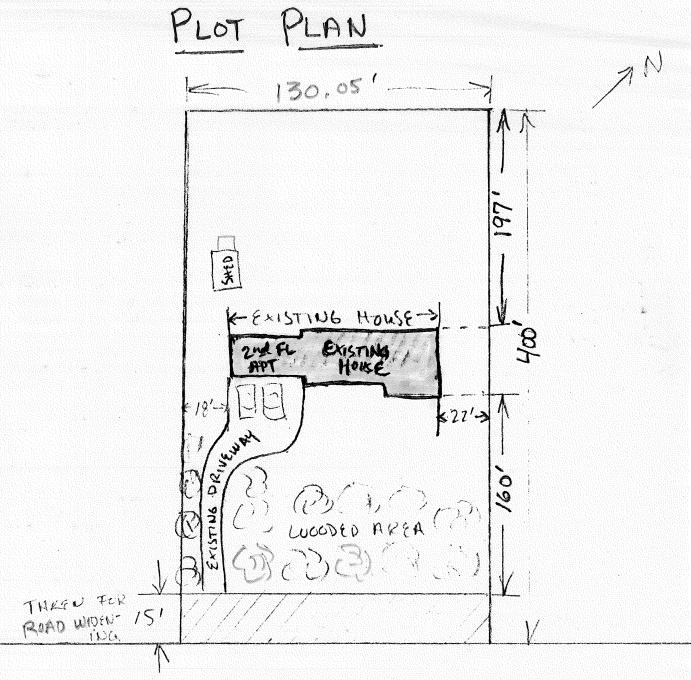

CONGRESS ST

GARRISEN

Robert Kelly-Rosenberg 1859 Congress St. Portland, ME. 01/102 772-552)

FLOUR PLAN

