Location of Construction: 1685 Congress St			Phone:		Permit No. 6107
Owner Address:	Stroudwater Cro Leasee/Buyer's Name: Chem Risk	Phone:	Busines	ssName:	PERMIT ISSUED
Contractor Name: Benchmark	Address: 650 Main St So. Pt.	Pho 1d, ME 04106		4–2963	Permit Issued: 0CT 2 8 1996
Past Use:	Proposed Use:	COST OF WO	RK:	PERMIT FEE:	001 2 0 1000
		\$18,000.00		\$ 110.00	CITY OF PORTLAND
Office	Same		Approved Denied	INSPECTION: Use Group: Type:	Zone: CBL: 219-A-013
Proposed Project Description:		Signature: PEDESTRIAN	ACTIVITII	Signature Horas Signature Horas Signature Horas H	Zoning Approval:
Make Interior Renovations		Action: Signature:	Approved Approved Denied	with Conditions:	Shoreland
Permit Taken By: Mary Gresik	Date Applied For:	ctober 1996			☐ Site Plan maj ☐ minor ☐ mm ☐
3. Building permits are void if work is not started tion may invalidate a building permit and stop				issued Remeints	☐ Interpretation ☐ Approved ☐ Denied Historic Preservation ☐ Not in District or Landmark ☑ Does Not Require Review ☐ Requires Review
	CERTIFICATION			~'V/S	Action:
I hereby certify that I am the owner of record of the authorized by the owner to make this application as if a permit for work described in the application is areas covered by such permit at any reasonable how	s his authorized agent and I agree to configure to the sued, I certify that the code official's authorized agent.	form to all applicat horized representa	ole laws of the	is jurisdiction. In addition	Approved with Conditions Denied
SIGNATURE OF APPLICANT Peter Hendri	ch ADDRESS:	24 Octol DATE:	per 1996	874-2963 PHONE:	- Kuagenenecht Haute
RESPONSIBLE PERSON IN CHARGE OF WORK	TITLE			PHONE:	CEO DISTRICT
White-Per	mit Desk Green–Assessor's Canar	y–D.P.W. Pink–P	ublic File	Ivory Card-Inspector	A. Powe

Location of Construction: 1685 Congress	Owner: Stone Strongward		one:	Permit 1961.077
Owner Address:	Leasee/Buyer's Name:	Phone: Bus	sinessName:	PERMIT ISSUED
Contractor Name:	Address: 650 Main St Se		974-2943	Permit Issued: 0CT 2 8 1996
Past Use:	Proposed Use:	COST OF WORK: \$18,000.00	PERMIT FEE: \$ 110.00	
Office	Same .	FIRE DEPT. Appro		Zone: CBL: Z13-A-013
Proposed Project Description:		Signature: PEDESTRIAN ACTIV	Signature: ITIES DISTRICT (P.U.D.)	Zoning Approval:
Make Interior Removation		Action: Approv Approv Denied	ved ved with Conditions: I	Special Zone or Reviews: Shoreland Wetland Flood Zone Subdivision
Permit Taken By: Nary Greeik	Date Applied For:	Signature:	Date:	☐ Site Plan maj ☐ minor ☐ mm ☐
 Building permits do not include plumbir Building permits are void if work is not s tion may invalidate a building permit an 	tarted within six (6) months of the date o	WITH PERMIT ISSUED		☐ Miscellaneous ☐ Conditional Use ☐ Interpretation ☐ Approved ☐ Denied Historic Preservation ☐ Not in District or Landmark ☐ Does Not Require Review ☐ Requires Review Action:
I hereby certify that I am the owner of record authorized by the owner to make this applica if a permit for work described in the applicat areas covered by such permit at any reasonal	tion as his authorized agent and I agree ion issued, I certify that the code offici	sed work is authorized by the owner to conform to all applicable laws al's authorized representative shal	of this jurisdiction. In additional have the authority to enter	on, 🗆 Denied
SIGNATURE OF APPLICANT Pater Re	address;	DATE:	PHONE:	
T. C.				

11-7-94 Joving Acoustics on jute. Pr Aprinkler placention?	
Sound Aloustica on into Da	acked (Fall 1 (Atallad.
	you the way of sales
Aprille Mischital?	
Secred floor walls in sta any sprinkler relocations.	elled. (all extractor to veich
May solin bay solar Ation	The state of the s
gong promises sugarines.	
Got completed per contractor.	
you conficult of	
	Inspection Record
	Type Date Foundation:
	Framing:
	Plumbing:
	Final:
	Other

BUILDING PERMIT REPORT

DATI	E: 10 31/76 ADDRESS: 1655 Congress for
REAS	SON FOR PERMIT: 5 Chov 1000
BUIL	DING OWNER: Mc Coaldril
	TRACTOR: Pench man
PERN	MIT APPLICANT: Poto, Harroly of APPROVAL: 4/5/4/5/4/5/4/24/
	CONDITION OF APPROVAL
1.	Before concrete for foundation is placed, approvals from the Development Review coordinator and Inspection Services must be obtained. (A24 hour notice is required prior to inspection)
2.	Precaution must be taken to protect concrete from freezing. It is strongly recommended that a registered land surveyor check all foundation forms
3	before concrete is placed. This is done to verify that the proper setbacks are maintained.
4.	Private garages located beneath habitable rooms in occupancies in Use Group R-1, R-2, R-3 or I-1 shall be separated from adjacent interior spaces by fire partitions and floor/ceiling assembly which are constructed with not less than 1-hour fire resisting rating. Private garages attached side-by-side to rooms in the above occupancies shall be completely separated from the interior spaces and the attic area by means of 1/2 inch gypsum board or the equivalent applied to the garage means of 1/2 inch gypsum board or
5.	the equivalent applied to the garage side. (Chapter 4 section 407.0 of the BOCA/1996) Guardrail & Handrails-A guardrail system is a system of building components located near the open sides of elevated walking surfaces for the purpose of minimizing the possibility of an accidental fall from the walking surface to the loser level. Minimum height all Use Groups 42:, except Use Group R which is 36". In occupancies in Use Group A,B, H-4, I-1, I-2 M and R and public garages and open parking structures, open guards shall have balusters or be of solid material such that a sphere with a diameter of 4" cannot pass through any opening. Guards shall not have an ornamental pattern that would provide a ladder effect.
6.	Headroom in habitable space is a minimum of 7'6".
7.	Stair construction in Use Group R-3 & R-4 is a minimum of 10" tread and 7 3/4" maximum rise. All other Use Group minimum 11" tread, 7" maximum rise.
8.	The minimum headroom in all parts of a stairway shall not be less than 80 inches.
9.	Every sleeping room below the fourth story in buildings of Use Groups R and I-1 shall have at least one operable window or exterior door approved for emergency egress or rescue. The units must be operable from the inside without the use of special knowledge or separate tools. Where windows are provided as means of egress or rescue, they shall

have a sill height not more than 44 inches (1118mm) above the floor. All egress or rescue windows from sleeping rooms shall have a minimum net clear opening height dimension of 24 inches(610mm). The minimum net clear opening width dimension shall be 20 inches (508mm), and a minimum net clear opening of 5.7 sq. feet.


- 10. Each apartment shall have access to two (2) separate, remote and approved means of egress. A single exit is acceptable when it exits directly from the apartment to the building exterior with no communications to other apartment units.
- 11. All vertical openings shall be enclosed with construction having a fire rating of at least one (1) hour, including fire doors with selfclosers.
- The boiler shall be protected by enclosing with on (1) hour fire-rated construction 12. including fire doors and ceiling, or by providing automatic extinguishment.
- All single and multiple station smoke detectors shall be of an approved type and shall be 13. installed in accordance with the provisions of the City's building code Chapter 9, Section 19, 919,3,2 (BOCA National Building Code/1996), and NFPA 101 Chapter 18 & 19. (Smoke detectors shall be installed and maintained at the following locations):
 - 1. In the immediate vicinity of bedrooms
 - 2. In all bedrooms
 - 3. In each story within a swelling unit, including basements

In addition to the required AC primary power source, required smoke detectors in occupancies in Use Groups R-2, R-3 and I-1 shall receive power from a battery when the AC primary power source is interrupted. (Interconnection is required)

- A portable fire extinguisher shall be located as per NFPA #10. They shall bear the label of an approved agency and be of an approved type. 15. (16. (17.
 - The Fire Alarm System shall be maintained to NFPA #72 Standard.
 - The Sprinkler System shall maintained to NFPA #13 Standard.
 - All exit signs, lights, and means of egress lighting shall be done in accordance with Chapter 10 Section & Subsections 1023. & 1024. of the City's building code. (The BOCA National Building Code/1996)
- All construction and demolition debris must be disposed at the City's authorized reclamation site. The fee rate is attached. Proof of such disposal must be furnished to the office of Inspection Services before final Certificate of Occupancy is issued or demolition permit is granted.
 - Section 25-135 of the Municipal Code for the City of Portland states, "No person or 19. utility shall be granted a permit to excavate or open any street or sidewalk from the time of November 15 of each year to April 15 of the following year".
- The builder of a facility to which Section 4594-C of the Maine State Human Rights Act, 20. Title 5 MRSA refers, shall obtain a certification from a design professional that the plans of the facility meet the standards of construction required by this section. Prior to commencing construction of the facility, the builder shall submit the certification to the Division of Inspection Services.

This permit does not excuse the applicant from obtaining any license which may be needed from the City Clerk's Office.

imuel roffses, Chief of Inspection Services c.c. Lt. McDougall P. F. D.

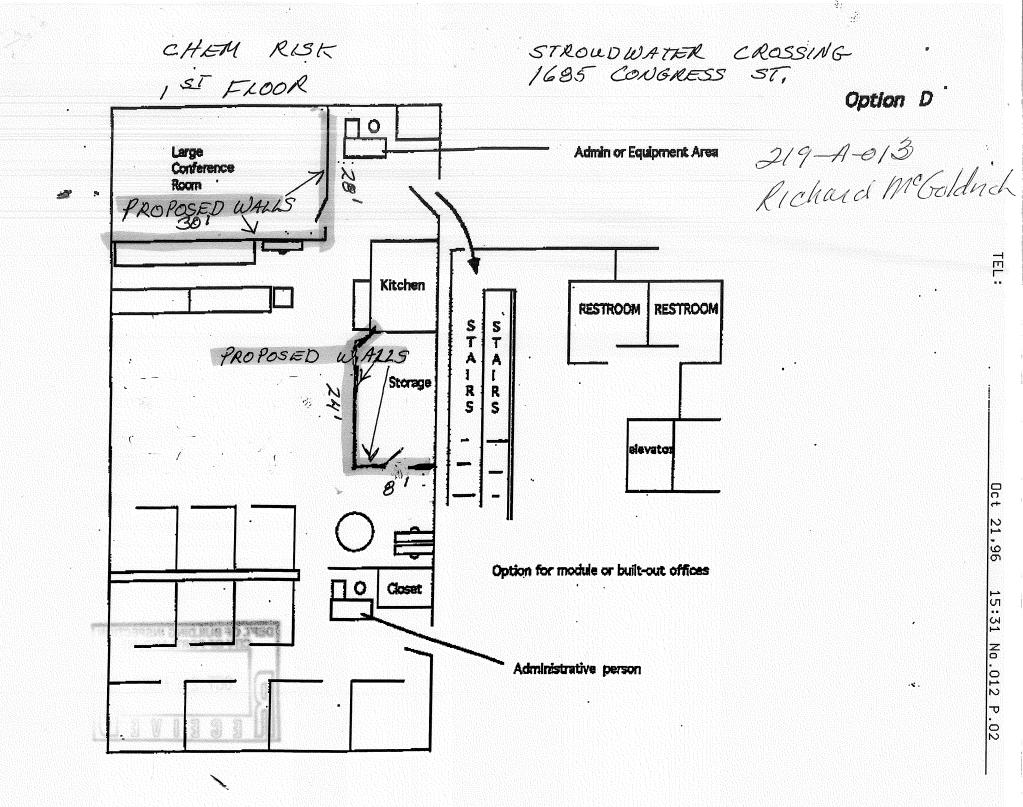

F:

Oct 21,96 15:30 No.012 P.01

CHEM RISK STROUDWATER CROSSING 1685 CONGRESS ST. , ST FLOOR Option D Large Admin or Equipment Area Conference *2* 9 PROPOSED WALLS Kitchen RESTROOM RESTROOM .15+ for PROPOSED WALLS Storage elevator 21,96 Option for module or built-out offices Closet 15:31 No.012 P.02 Administrative person

15:30

.012