

GENERAL DEMOLITION NOTES:




1. COORDINATE EXTENT OF DEMOLITION WITH THE REQUIREMENTS OF OTHER WORK OF THIS CONTRACT AS DESCRIBED HERE IN AND IN THE CONTRACTORS SUBMITTALS, AND WITH LOCATIONS OF FINISHES NOTED AS EXISTING TO REMAIN.
2. ANY WALL, PARTITION OR SURFACE DISTURBED BY WORK OF THIS CONTRACT SHALL BE PATCHED AND FINISHED CONTINUOUSLY TO THE NEAREST CORNER UNLESS NOTED OTHERWISE, MATCH EXISTING ADJACENT CONSTRUCTION FINISHES, CONTINUITY AND FIRE RATINGS UNLESS NOTED OTHERWISE.
3. PROTECT ALL FINISHES, MATERIALS AND EQUIPMENT NOTED AS EXISTING TO REMAIN. CONTRACTOR SHALL BE RESPONSIBLE TO REPLACE ALL FINISHES, MATERIALS AND EQUIPMENT DAMAGED DURING CONSTRUCTION.
4. FOR EXTENTS OF CEILING GRID REMOVALS AND ADJUSTMENTS REFER TO SHEET AE110.
5. DIMENSIONS INDICATED ± ARE EXISTING CONDITION DIMENSIONS TO BE VERIFIED IN FIELD.
6. OWNER IS RESPONSIBLE FOR THE REMOVAL AND RELOCATION OF EXISTING FURNITURE WITH IN SCOPE OF CONSTRUCTION.
7. ALL MEDICAL COMPUTER EQUIPMENT WILL BE REMOVED AND RELOCATED BY OWNER, AN/OR OWNERS CONTRACTOR.
8. ALL EXISTING SPRAY FIRE PROOFING TO REMAIN, CONTRACTOR IS RESPONSIBLE FOR REPAIRING AND REPLACING ANY DAMAGED OR REMOVED DURING CONSTRUCTION

DEMOLITION KEY NOTES:

- 1 REMOVE PARTITION ASSEMBLY IN ITS ENTIRETY.
- 2 REMOVE EXISTING PLUMBING FIXTURE COMPLETE.
- 3 REMOVE EXISTING CASEWORK COMPLETE.
- 4 REMOVE DOOR, FRAME AND HARDWARE ASSEMBLY.
- 5 REMOVE CEILING TILE AND GRID ASSEMBLY OR GWB CEILING ASSEMBLY COMPLETE. COORDINATE EXTENTS OF REMOVAL WITH PARTITION LOCATIONS AND EXISTING FINISHES TO REMAIN.
- 6 REMOVE FLOORING SYSTEM AND PREPARE SUBSTRATE FOR PROPOSED FLOORING. COORDINATE EXTENT WITH PROPOSED FINISH.
- 7 REMOVE PARTITION ASSEMBLY TO THE EXTENT REQUIRED FOR INSTALLATION OF DOOR. COORDINATE EXTENTS WITH FINISHES TO REMAIN. REFERENCE DOOR SCHEDULE.
- 8 MEDICAL EQUIPMENT/ FURNITURE REMOVED BY OWNER
- 9 REMOVE ANY MISC. WALL MOUNTED ITEMS ALONG WALL SURFACE. PROVIDE ITEM TO OWNER.
- 10 REMOVE EXISTING COLUMN WRAP COMPLETE. CAREFUL OF EXISTING SPRAY FIREPROOFING TO REMAIN.
- 11 REMOVE EXISTING WALL GUARD COMPLETE, SALVAGE FOR REINSTALLATION. SEE AE101.

144 Fore Street/P.O. Box 618
Portland, Maine 04104
tel. (207) 772-3946
fax. (207) 772-1070
www.smrinc.com

ARCHITECTURE
ENGINEERING
PLANNING
INTERIOR DESIGN
COMMISSIONING

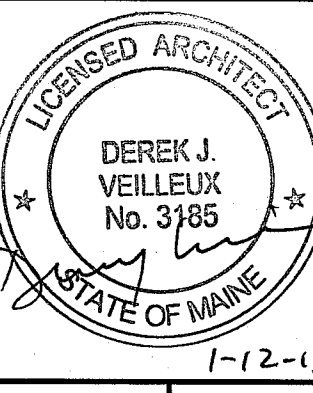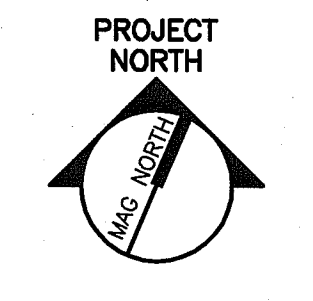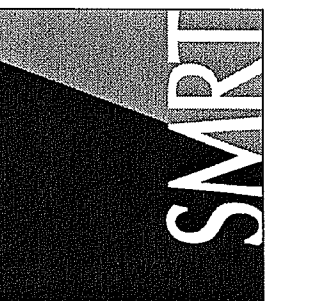

MAINE MEDICAL CENTER
ED CT FIT-UP AND READING RENOVATIONS
PORTLAND, MAINE
ISSUED FOR PERMITTING
1-12-15

REV	DESCRIPTION	DATE

GRAPHIC SCALE:
0" 1"

SCALE: 1/4"=1'-0"
PROJECT MANAGER: DJV
JC/DRAWN BY: MDR
A/E OF RECORD: DJV
CAD FILE: AD101-13128
PROJECT NO: 14150
DATE: 1/15/15

SHEET TITLE:
DEMOLITION PLAN

SHEET No.
AD101
© COPYRIGHT 2013 SMR INC.

F1 DEMOLITION PLAN

1/4"=1'-0"