Location of Construction:	Owner: Phone: 871-7251			Permit No: 960272	
Owner Address:	Leasee/Buyer's Name:	Phone:	Busines	ssName:	PERMIT ISSUED
Contractor Name:	Address:	Phone			Permit Issued:
Past Use:	Proposed Use:	COST OF WORK	K:	PERMIT FEE: \$ 75.00	APR 2 2 1996
Single Femily Dwelling	Single Family Dwelling w/attached garage	FIRE DEPT. Approved Denied		INSPECTION: Use Group: Type:	CITY OF PORTLAND
		Signature:		Signature:	Zone: CBL: 224A-A-6
Proposed Project Description: PEDESTRIAN ACTIVITIES DISTRICT (P.U.D.) Action: Approved				Zoning Approval: Special Zone or Reviews:	
construct attached garage as	Approved with Conditions: □ Denied □			☐ Shoreland ☐ Wetland ☐ Flood Zone	
		Signature:		Date:	☐ Subdivision
Permit Taken By: Vicki Dover	Date Applied For: 4/12/96		7. ·		☐ Site Plan maj ☐ minor ☐ mm ☐
3. Building permits are void if work is not tion may invalidate a building permit a **Mail permit**	UNTHERMI ISSUE		WITH REQUIREME		☐ Interpretation ☐ Approved ☐ Denied Historic Preservation ☐ Not in District or Landmark ☐ Does Not Require Review ☐ Requires Review Action:
authorized by the owner to make this applic if a permit for work described in the applica	CERTIFICATION I of the named property, or that the proposed we ation as his authorized agent and I agree to contion issued, I certify that the code official's authorized hour to enforce the provisions of the code	nform to all applicable othorized representative	e owne of e laws of ve shall ha	record and that I have been his jurisdiction. In addition,	LI Denied
SIGNATURE OF APPLICANT	700 Brighton Ave.	Portland, 0410 DATE:	2 871	PHONE:	Man Land
1		·			
RESPONSIBLE PERSON IN CHARGE OF	WORK, TITLE		•	PHONE:	CEO DISTRICT 4
* Whi	ite–Permit Desk Green–Assessor's Cana	ry–D.P.W. Pink–Pul	blic File	Ivory Card-Inspector	L CHERRY

7-17-90 Harage construction	1. Have added small deck to back s,	
hoch we gloch will be not in	16: Shee Tak	The state of the s
and y come may perce	Ja. Herr Jag.	
1001		
076		
· ·		
		Processor and the second second second
	Inspection Record	D-4-
	Type Foundation:	Date
	Framing:	
	Plumbing:	
	Final:	
	Other	

Applicant: Robert B. West Jr.
Address: 700 Bright A de

Date: 4/19/96

Assessors No.: 224AA-6 25

CHECK LIST AGAINST ZONTNG ORDTNANCE

Date - Existing hous

Zone Location - 2-3

Interior or corner lot -

Use - New gArAge

Sewage Disposal - MA

Rear Yards - 25' (eg - 118'Shown

Side Yards - 8' reg - 85' 4 19' Shown

Front Yards 26'

Front Yards - 25' - N/A

Projections -

Height - 1Story

Lot Area -

Building Area -

Area per Family -

Width of Lot -

Lot Frontage -

Off-street Parking -

Loading Bays -

Site Plan - \mathcal{V}

Shoreland Zoning

Flood Plains -

BUILDING PERMIT REPORT								
	DATE	:20/APril 196 ADDRESS: 100 Brighton Ave.						
	REAS	ON FOR PERMIT: TO CONSTRUCT attach garage						
	BUILDING OWNER: MB. Robert B. WEST TR.							
	CONTRACTOR: 12, chard HebberT APPROVED: * 1 *3 * 10							
	PERMIT APPLICANT: // / C DENIED:							
		CONDITION OF APPROVAL OR DENIAL						
K	1.	Before concrete for foundation is placed, approvals from the Development Review Coordinator and Inspection Services must be obtained. (A 24 hour notice is required prior to inspection)						
	2.	Precaution must be taken to protect concrete from freezing.						
Ľ	3.	It is strongly recommended that a registered land surveyor check all						
		foundation forms before concrete is placed. This is done to verify that the proper setbacks are maintained.						
	4.	All vertical openings shall be enclosed with construction having a fire rating of at least one(1) hour, including fire doors with selfclosers.						
	5.	Each apartment shall have access to two(2) separate, remote and						
		approved means of egress. A single exit is acceptable when it exits directly from the apartment to the building exterior with no						
		communications to other apartment units.						
	6.	The boiler shall be protected by enclosing with one(1) hour fire-rated construction including fire doors and ceiling, or by providing						
		automatic extinguishment. Sprinkler piping serving not more than six sprinklers may be connected to a domestic water supply having a						
		capacity sufficient to provide 0.15 gallons per minute, per square foot						
		of floor throughout the entire area. An INDICATING shut-off valve shall be installed in an accessible location between the sprinkler and						
		the connection to the domestic water supply. Minimum pipe size shall						
		be 3/4 inch copper or 1 inch steel. Maximum coverage area of a residential sprinkler is 144 sq. feet per sprinkler.						
	7.	Every sleeping room below the fourth story in buildings of Use Groups R and I-1 shall have at least one operable window or exterior door						
		approved for emergency egress or rescue. The units must be operable						
		from the inside without the use of special knowledge or						
		separate tools. Where windows are provided as <u>means of egress or</u> rescue, they shall have a sill height not more than 44 inches (1118mm)						
		above the floor. All egress or rescue windows from sleeping rooms						
		shall have a minimum net clear opening height dimension of 24 inches						
		(610mm). The minimum net clear opening width dimension shall be 20 inches (508 mm), and a minimum net clear opening of 5.7 sq. feet.						
	8.	A portable fire extinguisher shall be located as per NFPA #10. They						
	9.	shall bear the label of an approved agency and be of an approved type. All single and multiple station smoke detectors shall be of an approved						
		type and shall be installed in accordance with the provisions of the						
		City's building code Chapter 9, section 19, 919.3.2(BOCA National Building Code/1993), and NFPA 101 Chapter 18 & 19. (Smoke detectors						
		shall be installed and maintained at the following locations):						

- 1. In the immediate vicinity of bedrooms
- 2. In all bedrooms

3. In each story within a dwelling unit, including basements In addition to the required AC primary power source, required smoke detectors in occupancies in Use Groups R-2, R-3 and I-1 shall receive power from a battery when the AC primary power source is interrupted.

10. Private garages located beneath habitable rooms in occupancies in Use Group R-1, R-2, R-3 or I-1 shall be separated from adjacent interior spaces by fire partitions and floor/ceiling assembly which are constructed with not less than 1-hour fire resisting rating. Private garages attached side-by-side to rooms in the above occupancies shall be completely separated from the interior spaces and the attic area by means of 1/2 inch gypsum board or the equivalent applied to the garage (Chapter 4 section 407.0 of the BOCA/1993)

Guardrail & Handrails-A guardrail system is a system of building components located near the open sides of elevated walking surfaces for the purpose of minimizing the possibility of an accidental fall from the walking surface to the lower level. Minimum height all Use Groups 42", except Use Group R which is 36". In occupancies in Use Group A, B, H-4, I-1, I-2 M and R and public garages and open parking structures, open guards shall have balusters or be of solid material such that a sphere with a diameter of 4" cannot pass through any opening. Guards shall not have an ornamental pattern that would

provide a ladder effect. 12. All exit signs, lights, and means of egress lighting shall be done in accordance with Chapter 10, section & subsections 1023. & 1024. of the

City's building code. (The BOCA National Building Code/1993)

Stair construction in Use Group R-3 & R-4 is a minimum of 9" tread and 8-1/4" maximum rise. All other Use Group minimum 11" tread, 7" maximum

Headroom in habitable space is a minimum of 7'6".

The minimum headroom in all parts of a stairway shall not be less than 14. 15.

All construction and demolition debris must be disposed at the City's authorized reclamation site. The fee rate is attached. Proof of such 16. disposal must be furnished to the office of Inspection Services before final Certificate of Occupancy is issued or demolition permit is

Section 25-135 of the Municipal Code for the City of Portland states, "No person or utility shall be granted a permit to excavate or open any 17. street or sidewalk from the time of November 15 of each year to April

15 of the following year".


The builder of a facility to which Section 4594-C of the Maine State Human Rights Act, Title 5 MRSA refers, shall obtain a certification from a design professional that the plans of the facility meet the standards of construction required by this section. Prior to commencing construction of the facility, the builder shall submit the certification to the Division of Inspection Services.

This permit does not excuse the applicant from obtaining any license

which may be needed from the City Clerk's Office.

Surguel Hoffses, Chief of Inspection Services

/el 3/16/95

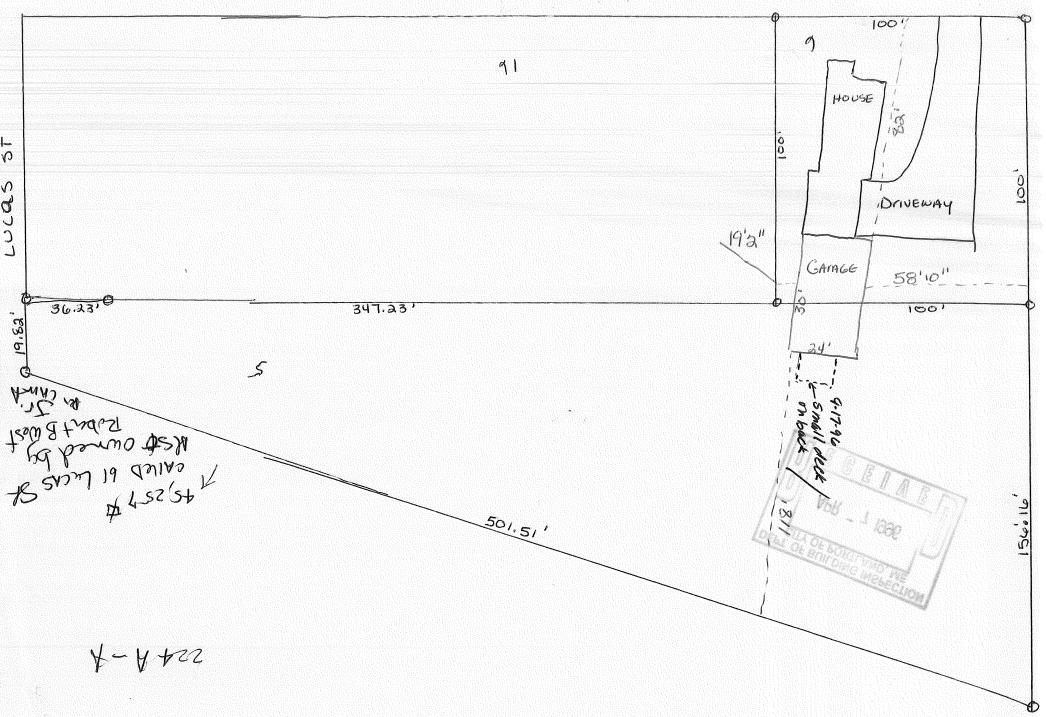

& Frame Cross Section - All Framing 24" O.C.
- Side way sheeting 1/2" cox
- Roof sheeting 1/2" cox 2x4 Jost - Roffy 216 Sub-Facia 2 x 12 2x6 x 14 2 x 6 x 14 Laminatel Door Headers K- 4-04-91 WER LAP 24'-0"

