


Consultants

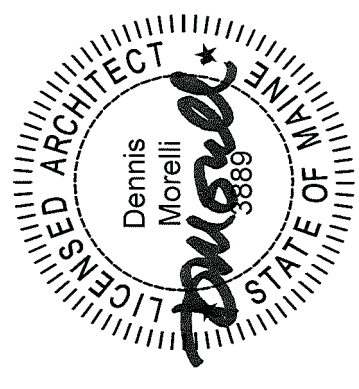

## Bramhall Team Training Facility

Campus  
 Bramhall  
 Building  
 Pavilion A  
 Floor  
 Third


Revisions

No	Revision	Date
Issue	ISSUED FOR PERMIT	
Date	4 APRIL 2015	
Project #		
Drawn By	DM	
Checked By	DFD	
Title	DEMOLITION PLAN	

Sheet

# D101

### PAVILION A

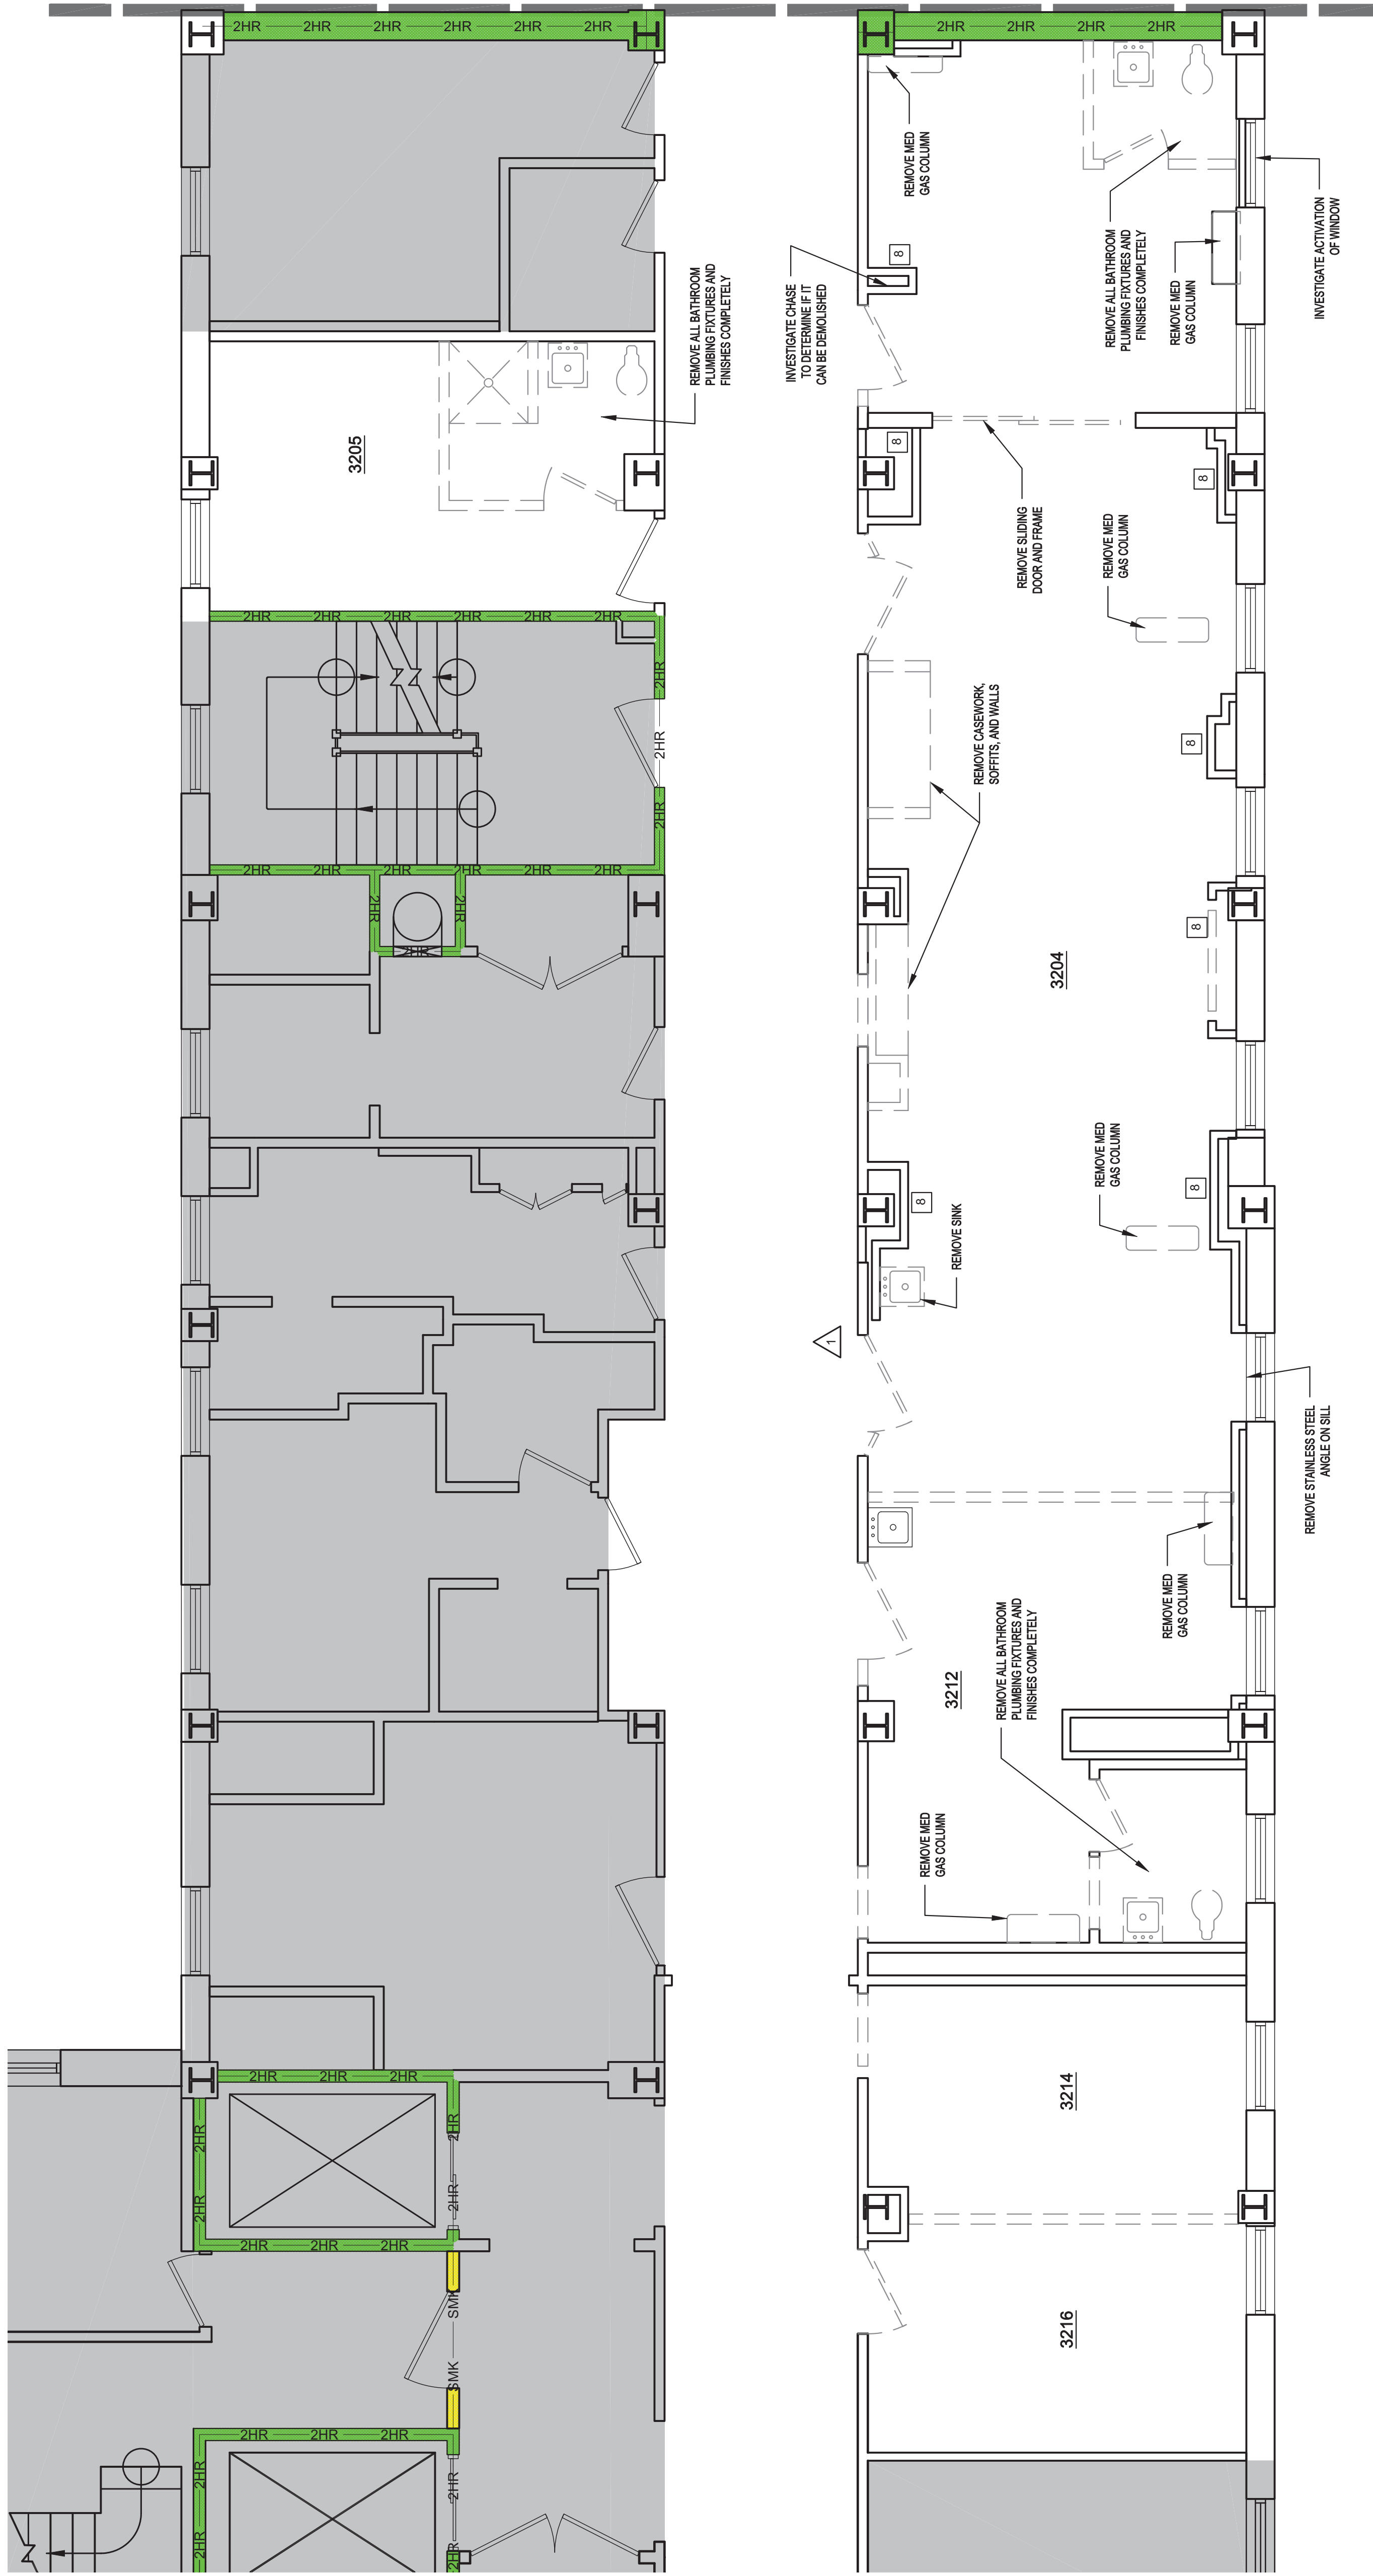

- DEMOLITION NOTES**
- ALL FLOORING WITHIN AREA OF WORK TO BE REMOVED. CORRIDOR FLOORING TO REMAIN.
  - REPAIR ALL DAMAGED OR NON-COMPLIANT FIREPROOFING DURING CONSTRUCTION.
  - REMOVE ALL CEILINGS, LIGHT FIXTURES, AND SWITCHES WITHIN AREA OF WORK.
  - REMOVE ALL SURFACE MOUNTED DEVICES AND CONDUIT. REPLACE WITH RECESSED IF DEVICE IS REQUIRED.
  - EXISTING NURSE CALL SYSTEM TO BE REMOVED BY MMC AS REQUIRED.
  - REMOVE EXISTING WALL FINISHES AS REQUIRED TO ACCOMMODATE NEW RECESSED ELECTRICAL, DATA, AND MEDICAL DEVICES AND PROVIDE ALL BLOCKING NECESSARY.
  - REMOVE ALL WINDOW TREATMENTS AND SHADES.
  - INVESTIGATE CHASES ALONG EXTERIOR WALL AND CORRIDOR WALL TO DETERMINE IF THEY CAN BE REMOVED OR MODIFIED TO INCREASE FLOOR SPACE.