I-FINISH LEGEND

TAG	MANUFACTURER	STYLE	COLOR/FINISH	SIZE	COMMENTS
ACOUSTICAL CEILING PANELS					
ACT-1	ARMSTRONG	DUNE 1775	WHITE; INTERLUDE XL HRC 9/16" EXPOSED T GRID	24"x24"	EDGE PROFILE: BEVELED TEGULAR
ACT-2	ARMSTRONG	CLEAN ROOM VL 868	WHITE; PRELUDE 15/16" EXPOSED T GRID	24"x24"	GASKET & HOLD DOWN CLIPS
CABINET FINISH					
CH-1	MOCKETT	DP128-SSS	STAINLESS STEEL FINISH	6 11/16"	SEE DETAIL FOR ORIENTATION
INTERIOR GLASS					
IGL-1	PARILUSE, LLC	MICROBLIND	WHITE BLIND IN TEMPERED IGU	THICKNESS: 1"	
IGL-2		CLEAR	TEMPERED	THICKNESS: 1/4"	
IGL-3		CLEAR	TEMPERED LEAD GLASS	THICKNESS: 1/4"	LEAD LINED
PAINT					
P-1	SHERWIN WILLIAMS	PRO-GREEN 200 LATEX	CUSTOM TO MATCH BENJAMIN MOORE SUPER WHITE PM-1		ALL WALLS U.O.N.
P-2	SHERWIN WILLIAMS	INDUSTRIAL PRE-CATALYZED WATER-BASED EPOXY	CUSTOM TO MATCH BENJAMIN MOORE WHITE DIAMOND 2121-60		
P-3	SHERWIN WILLIAMS	INDUSTRIAL PRE-CATALYZED WATER-BASED EPOXY	CUSTOM TO MATCH BENJAMIN MOORE COOL AQUA 2056-40		TOP ACCENT AT OR'S
P-4	SHERWIN WILLIAMS	INDUSTRIAL PRE-CATALYZED WATER-BASED EPOXY	CUSTOM TO MATCH BENJAMIN MOORE SURF BLUE 2056-30		TOP ACCENT AT OR'S
P-5	SHERWIN WILLIAMS	PRO-GREEN 200 LATEX	CUSTOM TO MATCH BENJAMIN MOORE SUPER WHITE PM-1 (FLAT)		TO BE FLAT FINISH. USED AT ALL CEILING SOFFITS U.O.N.
P-6	SHERWIN WILLIAMS	INDUSTRIAL PRE-CATALYZED WATER-BASED EPOXY SEMI-GLOSS	COLOR: 6469 DEWY		EXISTING AT OR CORRIDOR
PLASTIC LAMINATE					
PL-1	PIONITE	SW826-N	COLOR: SUEDE ANGEL WHITE		
PL-2	NEVAMAR	MXT003T	COLOR: SILVER ALU METALX		
RESILIENT SHEET FLOORING					
EPF-1	BY OWNER	-	-	THICKNESS: 7MM	EPOXY FLOOR BY OWNER'S VENDOR
RF-2	NORA	NORAPLAN SENTICA	6526 MOUNTAIN AIR	THICKNESS: 3MM	3 COLOR PATTERN
RF-3	NORA	NORAPLAN SENTICA	6527 DEEP SEA	THICKNESS: 3MM	3 COLOR PATTERN
RF-4	NORA	NORAPLAN SENTICA	MATCH EXISTING ADJACENT FLOORING	MATCH EXISTING	MATCH EXISTING
SOLID SURFACE					
SS-1	DUPONT	CORIAN	GLACIER WHITE	THICKNESS: 3/4"	HORIZONTAL APPLICATION
SS-2	DUPONT	CORIAN	GLACIER WHITE	THICKNESS: 1/4"	VERTICAL APPLICATION
WALL BASE					
EPB-1	BY OWNER	-	-	HEIGHT 8"	METAL TRIM @TOP PER MANF.
RB-1	FLASHCOVE BASE	NORAPLAN SENTICA	6527 DEEP SEA	HEIGHT: 8"; THICKNESS: .125"	METAL TRIM AT TOP PER MANF.
RB-2	FLASH COVE BASE	NORAPLAN SENTICA	PATCH ADJACENT BASE	PATCH EXISTING	
WALL PROTECTION					
WP-1	ACROVYN	SQUARE EDGE WALL PANEL	949 WHITE : PINSTRIPE TEXTURE	THICKNESS: .040"	4'-0" FROM TOP OF BASE: SEE ELEVATIONS
WP-2	PANOLAM	FIBER REINFORCED LAMINATE	SEE PL-1FOR COLOR; SUEDE TEXTURE	THICKNESS: .75"	HEIGHT PER ROOM FINISH SCHEDULE/SEE ELEVATIONS
WALL PROTECTION - CORNER GUARDS					
CG-1	CORNER GUARD	INPRO CORP.	SURFACE MOUNT STAINLESS STEEL CORNER GUARD	7'-2" A.F.F.	TO 7'-2" A.F.F. U.O.N.
CG-2	CORNER GUARD	INPRO CORP.	WING WALL WRAP AROUND SURFACE MOUNT STAINLESS STEEL CORNER GUARD	7'-2" A.F.F.	TO 7'-2" A.F.F. U.O.N.
WALL PROTECTION - CRASH GUARDS					
CR-1	ECR-32S - HIDDEN FASTENERS	STAINLESS STEEL FINISH			TYPICAL CRASH GUARD

DOOR SCHEDULE

		dv	DOOR					FRAME						
			OPENING SIZE									FIRE	HARDWARE	
TAG	RM NAME	RM NUM	WIDTH	HEIGHT	TYPE	MTL	FIN	TYPE	MTL	FIN	DTLS	RATING	SET	COMMENTS
1318-A	CORRIDOR	1318	3' - 6"	7' - 0"	D1	HM	PT	F1	HM	PT	5/6 A00-50	-	1	EXTERIOR DOOR, PROVIDE THRESHOLD & WEATHERSTRIPPING
OR02-A	HYBRID OR	OR02	6' - 0"	8' - 0"	D8	WD	SF	F1	HM	PT	7/8 - A00-50	SR	2	LEAD LINED DOOR & FRAME. PROVIDE IGL-3
OR02-B	HYBRID OR	OR02	3' - 6"	7' - 0"	D14	WD	SF	F1	HM	PT	7/8 - A00-50	SR	3	LEAD LINED DOOR & FRAME. PROVIDE IGL-3
OR02-C	HYBRID OR	OR02	3' - 6"	7' - 0"	D14	WD	SF	F1	HM	PT	7/8 - A00-50	SR	3	LEAD LINED DOOR & FRAME. PROVIDE IGL-3
OR06-A	OR #6	OR06	6' - 0"	8' - 0"	D8	WD	SF	F1	HM	PT	5/6 A00-50	SR	2	
OR06-B	OR #6	OR06	3' - 6"	7' - 0"	D14	WD	SF	F1	HM	PT	5/6 A00-50	SR	3	
OR06-C	OR #6	OR06	2' - 8"	7' - 0"	Exist	-	-	-	-	-	5/6 A00-50	-	-	EXISTING DOOR TO REMAIN
OR02A-A	CONTROL ROOM	OR02A	3' - 0"	7' - 0"	D14	WD	SF	F1	HM	PT	5/6 A00-50	SR	3	
OR02B-A	HYBRID OR EQUIP ROOM	OR02B	3' - 0"	7' - 0"	D1	WD	SF	F1	HM	PT	5/6 A00-50	SR	5	

FINISH SCHEDULE -

ROOM NUMBER	ROOM NAME	FLOOR FINISH	BASE MATL	WALL FINISH	WALL PROTECTION	CEILING FINISH	COMMENTS
DC-B-OR1	CORRIDOR	RF-4	RB-2	P-6	CG-1	EXIST/GWB	
DC-B-OR2	CORRIDOR	RF-4	RB-2	P-6	CG-1	EXIST/ACT-2	
DC-B-OR3	CORRIDOR	RF-4	RB-2	P-4	CG-1	EXIST/ACT-2	
DC-B-OR4	CORRIDOR	RF-4	RB-2	P-4	CG-1	EXIST/GWB	
DC-B-OR5	CORRIDOR	RF-4	RB-2	P-6	CG-1	ACT-2/EXIST	
OR02	HYBRID OR	EPX-1	EPB-1	P-2, P-3, P-4	-	GWB	PROVIDE MODULAR CEILING SYSTEM. ADD ALT No.3
OR02B	HYBRID OR EQUIP ROOM	RF-2	RB-1	P-2	-	ACT-2	PROVIDE PLYWOOD WALL PANELS ON WALLS AS REQ'D FOR EQUIP.
OR06	OR #6	RF-2; RF-3	RB-1	P-2, P-3, P-4	-	GWB	PROVIDE MODULAR CEILING SYSTEM. ADD ALT. No.3
OR02A	CONTROL ROOM	RF-2	RB-1	P-2	-	ACT-2	
SS01	SUB-STERILE	-	-	-	-	-	PATCH TO MATCH EXIST. FOR ANY DAMAGED FINISHES

DOOR SCHEDULE GENERAL NOTES

3. ALL DOORS IN SMOKE RESISTANT PARTITIONS TO HAVE POSITIVE LATCHING.

4. FIRE-RATING GLAZING IN DOORS SHALL MEET THE FIRE RATING REQUIREMENT OF THE DOORS TO WHICH THEY ARE INSTALLED.

5. "SWING CLEAR" HINGES SHALL BE PROVIDED AT ALL OPERATING ROOM, AND PROCEDURE ROOM DOORS.

6. ALL DOORS TO HAVE BOXED HEADERS UNLESS STEEL CHANNELS ARE INDICATED IN THE REMARKS COLUMN OF THE DOOR SCHEDULE OR UNLESS OTHERWISE INDICATED BY HEAD DETAIL.

DOOR SCHEDULE ABBREVIATIONS


HM - HOLLOW METAL

+ - REFER TO MANUFACTURER


PT - PAINTED FINISH

SF - STAINED FINISH


SR - SMOKE RESISTANT




8 HM LEAD LINED JAMB @ GLASS DETAIL
3" = 1'-0"




7 HM LEAD LINED JAMB DETAIL
3" = 1'-0"

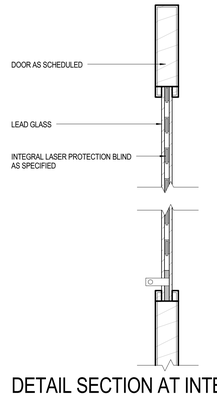


9 DETAIL SECTION AT INTEGRAL LASER PROTECTION BLINDS
3" = 1'-0"



6 HM HEAD DETAIL
3" = 1'-0"




5 HM JAMB DETAIL
3" = 1'-0"



F1

2 DOOR FRAME TYPES
1/4" = 1'-0"

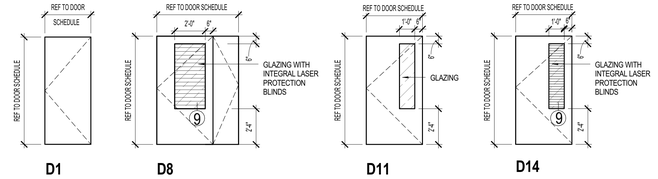

1 DOOR TYPES
1/4" = 1'-0"

Reviewed for Code Compliance
Portland Fire Prevention Division
Approved with Conditions

Date: 10/16/15

PERKINS + WILL

225 Franklin St., Suite 1100
Boston, MA 02110
t 617.478.0300
f 617.478.0321
www.perkinswill.com

Maine Medical Center
MaineHealth

HYBRID OR & OR #6

22 Bramhall Street, Portland, Maine 04102

MEP ENGINEER

AKF ENGINEERS

41 Farnsworth Street, 3rd Floor
Boston, MA 02210
t 617.737.1111
f 617.737.4311

STRUCTURAL ENGINEER

SIMPSON GUMPERTZ & HEGER

41 Seyon Street, Building 1, Suite 500
Waltham, MA 02453
t 781.907.9000
f 781.907.9009

LICENSED ARCHITECT
DENNIS L. KAISER
No. 2724
STATE OF MAINE

Revisions

NO	ISSUE	DATE
	ISSUED FOR PERMIT	08.21.2015
	ISSUED FOR BID	07.31.2015

Sheet Information

Date	AUGUST 21, 2015
Job #	152168.023
Drawn	Author
Checked	Checker
Approved	Approver

Title

BASEMENT FINISH AND DOOR SCHEDULE

Sheet

A00-50

Copyright © 2015 Perkins+Will

8/24/2015 1:37:56 PM
c:\temp\MMC_NEW_HYBRID OR_allinsan.ostreves@perkinswill.com.rvt