



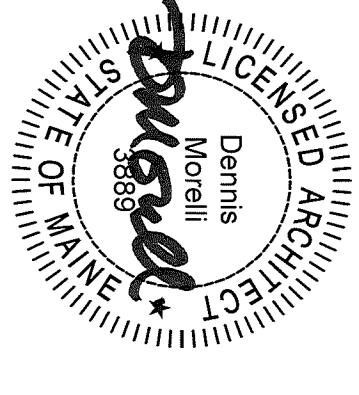
1 LIFE SAFETY PLAN - GROUND FLOOR
DATE: 1/12/17

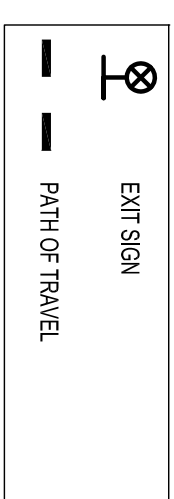

<u>Code Compliance</u>		<u>Code Analysis per NFPA 101 (2009) & IBC 2009</u>
<u>Applicable Codes</u>	IBC/IEBC 2009 NFPA 101 ADA 2010	Occupancy: Existing Business (no change in use) Occupant Load allowed: (100sf pp) x 7200 sf = 72 people
<u>Existing Construction</u>	Type 2B (IBC) Type 2 (000) (NFPA)	Fully sprinklered floor Monitored Fire Alarm system
<u>Sprinklers</u>	NFPA 13 Supervised	Level 2 Alterations (IBC) / Minor Rehabilitation (NFPA)
<u>Occupancy</u>	Business	Common Path of Travel allowed: 100' Travel Distance Allowed: 300'
<u>Work Class</u>	Minor Rehabilitation (NFPA) Level 2 Alteration (IEBC)	


Maine Medical Center
 MaineHealth
 Facilities Development
 22 Branchhall Street, Portland, Maine 04102-3175
 (207) 662-2013 Fax: (207) 662-6195

Consultants



Facilities Management Renovations

Campus
 Branchhall
 Building
 ESB
 Floor
 Ground

Revisions

No	Revision	Date

FOR PERMIT
 DATE: 5 FEBRUARY 2016
 PROJECT #:
 DRAWN BY: DJM
 CHECKED BY: GFD
 TITLE:

LIFE SAFETY PLAN

Sheet

G003