


LOGIN: Chamapagna, Deanna  
 PLOT DATE: 06/24/2016 1:34 PM  
 SAVE DATE: 06/24/2016 1:31 PM  
 W:\main\shy\Projects - B160089-000-Design\Main\CAD\Richards 7-5919\Fig\B160089-000\_P01-02\_P01-02.dwg

PERKINS  
 225 Franklin Street, Suite 1100  
 Boston, MA 02110  
 1617-478-0300  
 1617-478-0321  
 www.perkinswill.com

**CONSULTANTS**  
 MEPPF  
**AKF GROUP LLC**  
 99 Bedford St., 2nd Floor  
 Boston, MA 02111  
 1617-737-1111  
 1617-737-4311  
 STRUCTURAL  
**SGH INC.**  
 41 Seyon St.  
 Waltham, MA 02453  
 1781-507-8000  
 1781-507-9009

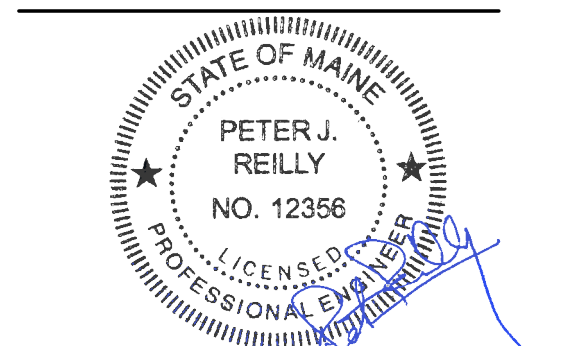

**PROJECT**  
**ACCU**  
**RELOCATION**  
 22 Bramhall Street  
 Portland, Maine 04102

Maine Medical Center  
 MaineHealth

**MAINE MEDICAL CENTER**  
 22 Bramhall Street  
 Portland, Maine 04102

06.24.2016  
**ISSUE CHART**

NO.	ISSUE	DATE
1	ISSUED FOR PERMIT	06.24.2016
Job Number	B160089-000	
Checked	DGC	
Approved	PJR	

**TITLE**  
**RICHARDS 8 -**  
**PLUMBING DEMOLITION**  
**PLAN - WEST**

**SHEET NUMBER**  
**P01-02**

Copyright © 2016 Perkins+Will

**CONTRACTOR'S DUTY TO INSPECT:**  
 THE OWNER DISCLAIMS ANY WARRANTY ABOUT THE ACCURACY OR COMPLETENESS OF EXISTING CONDITIONS AFFECTED BY THIS WORK. PORTIONS OF THE AREAS TO BE DEMOLISHED AND ALTERED WHERE NOT ACCESSIBLE DURING FIELD SURVEY DISCOVERY EITHER DUE TO LIMITATIONS IN ACCESS BECAUSE OF CONCEALMENT OF PIPING UTILITIES BEHIND INACCESSIBLE CHASES, WALL, OR CEILING. THE CONTRACTOR SHALL EXERCISE REASONABLE DUE DILIGENCE TO DISCOVER ANY REASONABLE FORESEEABLE PHYSICAL CONDITIONS AFFECTED BY THIS WORK. THE DESCRIPTIONS ON THE DRAWING OF UTILITIES IN CONCEALED AREAS REQUIRING DEMOLITION, MODIFICATION, OR OFFSET IS BASED ON SIMILAR CONDITIONS ENCOUNTERED IN THE BUILDING, PIPING VISIBLE IN ADJACENT SPACES AND ON GENERAL ASSUMPTIONS ABOUT THE PLUMBING PIPING SYSTEMS. THE CONTRACTOR SHALL INCLUDE IN HIS PRICE ANY AND ALL COSTS ASSOCIATED WITH THE DEMOLITION AND ALTERATION OF CONCEALED WORK DESCRIBED ON THE PLANS AND REASONABLY INFERRED. ANY ACTUAL CONDITIONS DISCOVERED DURING DEMOLITION THAT DIFFER MATERIALLY FROM THOSE DESCRIBED ON THE PLANS SHALL BE BROUGHT TO THE ATTENTION OF THE OWNER FOR FURTHER COORDINATION AND INVESTIGATION. PROMPT NOTICE OF DIFFERING AND UNFORESEEN CONDITIONS BY THE CONTRACTOR IS OF THE ESSENCE TO ALLOW A REVIEW TO THE CONDITIONS BY THE OWNER BEFORE THEY ARE DISTURBED AND TO DETERMINE WHETHER THE DIFFERING CONDITION WARRANTS EQUITABLE ADJUSTMENT, IF ANY.

**KEY NOTES:**  
 ① EXISTING WATER CLOSET TO BE REMOVED. ALL ASSOCIATED PIPING, VALVES, MATERIAL, EQUIPMENT AND TRIM TO BE DISCONNECTED AND REMOVED. CUT AND CAP EXISTING COLD WATER, SANITARY & VENT PIPING BACK TO NEAREST MAIN.  
 ② EXISTING LAVATORY TO BE REMOVED. ALL ASSOCIATED PIPING, VALVES, MATERIAL, EQUIPMENT AND TRIM TO BE DISCONNECTED AND REMOVED. CUT AND CAP EXISTING COLD WATER, HOT WATER, WASTE & VENT PIPING BACK TO NEAREST MAIN.  
 ③ EXISTING SHOWER AND FLOOR DRAIN TO BE REMOVED. ALL ASSOCIATED PIPING, VALVES, MATERIAL, EQUIPMENT AND TRIM TO BE DISCONNECTED AND REMOVED. CUT AND CAP EXISTING COLD WATER, HOT WATER, WASTE & VENT PIPING BACK TO NEAREST MAIN.  
 ④ CUT AND CAP EXISTING DOMESTIC WATER SUPPLY TO BATHROOMS AS SHOWN FOR FUTURE RECONNECTION.