


CONTRACTOR'S DUTY TO INSPECT:
 THE OWNER DISCLAIMS ANY WARRANTY ABOUT THE ACCURACY OR COMPLETENESS OF EXISTING CONDITIONS AFFECTED BY THIS WORK. PORTIONS OF THE AREAS TO BE DEMOLISHED AND ALTERED WHERE NOT ACCESSIBLE DURING FIELD SURVEY DISCOVERY EITHER DUE TO LIMITATIONS IN ACCESS BECAUSE OF CONCEALMENT OF PIPING UTILITIES BEHIND INACCESSIBLE CHASES, WALL, OR CEILING. THE CONTRACTOR SHALL EXERCISE REASONABLE DUE DILIGENCE TO DISCOVER ANY REASONABLE FORESEEABLE PHYSICAL CONDITIONS AFFECTED BY THIS WORK. THE DESCRIPTIONS ON THE DRAWING OF UTILITIES IN CONCEALED AREAS REQUIRING DEMOLITION, MODIFICATION, OR OFFSET IS BASED ON SIMILAR CONDITIONS ENCOUNTERED IN THE BUILDING, PIPING VISIBLE IN ADJACENT SPACES AND ON GENERAL ASSUMPTIONS ABOUT THE PLUMBING AND FIRE PROTECTION PIPING SYSTEMS. THE CONTRACTOR SHALL INCLUDE IN HIS PRICE ANY AND ALL COSTS ASSOCIATED WITH THE DEMOLITION AND ALTERATION OF CONCEALED WORK DESCRIBED ON THE PLANS AND REASONABLY INFERRED. ANY ACTUAL CONDITIONS DISCOVERED DURING DEMOLITION THAT DIFFER MATERIALLY FROM THOSE DESCRIBED ON THE PLANS SHALL BE BROUGHT TO THE ATTENTION OF THE OWNER FOR FURTHER COORDINATION AND INVESTIGATION. PROMPT NOTICE OF DIFFERING AND UNFORESEEN CONDITIONS BY THE CONTRACTOR IS OF THE ESSENCE TO ALLOW A REVIEW TO THE CONDITIONS BY THE OWNER BEFORE THEY ARE DISTURBED AND TO DETERMINE WHETHER THE DIFFERING CONDITION WARRANTS EQUITABLE ADJUSTMENT, IF ANY.

- KEYNOTES:**
- 1/2" CW DROP
2" W DN & V RISE } TO L-1
1/2" HW DROP
 - 1/2" CW DROP
4" S DN & 2" V RISE } TO WC-1
 - CONTRACTOR SHALL COORDINATE PIPE ROUTING AND INSTALLATION OF NE 1/2" CW, 1/2" HW AND 2" V PIPING ABOVE THE CEILING WITH THE EXISTING BUILDING, EXISTING/NEW SYSTEMS AND ALL UNFORESEEN OBSTRUCTIONS AS REQUIRED.
 - CONNECT TO EXISTING CW, HW AND VENT PIPING WITH NEW 1/2" CW, 1/2" HW AND 2" V PIPING CONNECTIONS AS SHOWN.
 - EXISTING PLUMBING WITHIN SHAFT TO REMAIN.
 - 1/2" CW DROP
2" W DN & V RISE } TO SK-1
1/2" HW DROP
 - 4" S & 2" V RISE FROM CSS-1. EXTEND WASTE WITHIN CHASE AS SHOWN.
4" S DN
2" W & V RISE FROM SK-1. EXTEND WASTE WITHIN CHASE AS SHOWN.
1/2" CW & 1/2" HW DROP & EXTEND WITHIN CHASE TO SUPPLY CSS-1 & SK-1.
 - 2" W & V RISE FROM L-1. EXTEND WASTE WITHIN CHASE AS SHOWN.
1/2" CW & 2" CW DROP & EXTEND WITHIN CHASE TO SUPPLY (2) L-1 & (2) WC-1.
4" S & 2" V RISE FROM WC-1. EXTEND SANITARY WITHIN CHASE AS SHOWN.
4" S DN
4" S & 2" V RISE FROM WC-1. EXTEND WASTE WITHIN CHASE AS SHOWN.

225 Franklin Street, Suite 1100
 Boston, MA 02110
 1617.478.0200
 1617.478.0221
 www.perkinswill.com

CONSULTANTS
AKF GROUP LLC
 99 Bedford St., 2nd Floor
 Boston, MA 02111
 1617.737.1111
 1617.737.4311

STRUCTURAL
SGH INC.
 41 Seyon St.
 Waltham, MA 02453
 1.781.907.9300
 1.781.907.9309

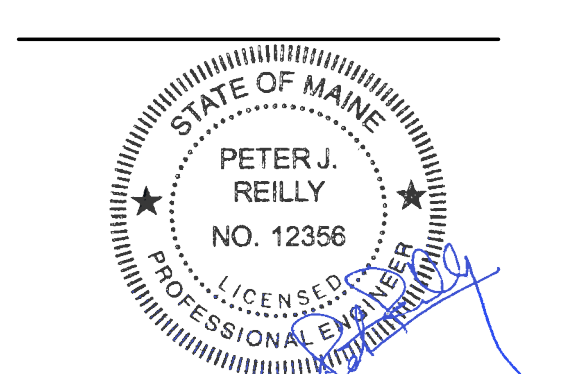

PROJECT
ACCU RELOCATION
 22 Bramhall Street
 Portland, Maine 04102

Maine Medical Center
 MaineHealth

MAINE MEDICAL CENTER
 22 Bramhall Street
 Portland, Maine 04102

06.24.2016
ISSUE CHART

NO.	ISSUE	DATE
1	ISSUED FOR PERMIT	06.24.2016
2	Job Number	B160089-000
3	Checked	DGC
4	Approved	PJR

TITLE
RICHARDS 8 - PLUMBING FLOOR PLAN - EAST

SHEET NUMBER
P02-04

LOGIN: Champana, Deanna PLOT DATE: 06/24/2016 1:32 PM SAVE DATE: 06/24/2016 1:32 PM
 W:\main\p\Projects\B160089-000-Design\Main\CAD\Richards 7-9\Richards 8-Plumbing\B160089-000_P02-04.dwg