


RENOVATION NOTES

- ① INSTALL NEW WINDOW TO MATCH.
- ② ADD POWER AND DATA AS SHOWN
- ③ REWORK EXISTING STEAM HEATING SYSTEM TO PROVIDE A LINEAR SYSTEM ALONG THE WINDOWS. ADD ONE NEW SOURCE IN STORAGE AREA.
- ④ PAINT ALL WALLS
- ⑤ SCRAPE AND PAINT CEILING AND EXPOSED BEAMS
- ⑥ ADD NEW INSULATION WRAP ON ALL EXPOSED PIPING AS REQUIRED
- ⑦ ADD 2 NEW MINI-SPLIT AIR CONDITIONING SYSTEMS TIED TO EXISTING LOOP- VIF
- ⑧ LEVEL FLOOR AND ADD CARPET TILE FLOORING
- ⑨ RE-WORK SPRINKLER SYSTEM AS REQUIRED
- ⑩ NEW WOOD STAIRS AND STORAGE
- ⑪ ADD/ REVISED EXISTING FIRE ALARM SYSTEM AS REQUIRED
- ⑫ ADD NEW LED LINEAR PENDANT LIGHT FIXTURES

CODE ANALYSIS

OCCUPANCY: BUSINESS
 CONSTRUCTION TYPE: IIB
 SPRINKLER: SUPERVISED
 FIRE ALARM SYSTEM: SUPERVISED
 STORAGE AREA: LOW HAZARD- MISC OVERFLOW STORAGE

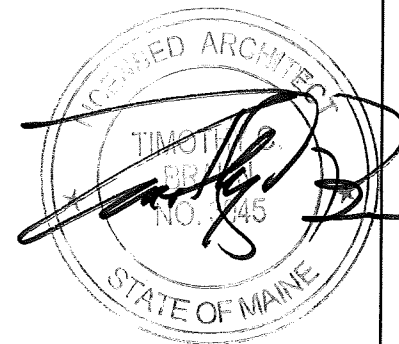

No	Revision	Date
2	REVISED	5/10/17
1	Issued for Construction	3/17/17

Date
 Project #
 Drawn By
 Checked By

12/20/16
 -
 TB
 DM

Title
Floor Plan

Sheet
A1.1