

EXPIRED

Form # P 04


DISPLAY THIS CARD ON PRINCIPAL FRONTAGE OF WORK CITY OF PORTLAND

Please Read
Application And
Notes, If Any,
Attached

SECTION PERMIT

Permit Number: 041088

This is to certify that Maine Medical Center/Langf... & Low...
has permission to Renovate 7th flr patient room Richards Bldg.
AT 2 Bramhall St 053 D007001



provided that the person or persons, firm or corporation accepting this permit shall comply with a
of the provisions of the Statutes of Maine and of the ordinances of the City of Portland regulatin
the construction, maintenance and use of buildings and structures, and of the application on file i
this department.

Apply to Public Works for street line
and grade if nature of work requires
such information.

Notification of inspection must
given and work in permit in procu
before this building or part thereof
labeled or closed-in.
HOURS NOTICE IS REQUIRED.

A certificate of occupancy must be
procured by owner before this build-
ing or part thereof is occupied.

OTHER REQUIRED APPROVALS

Fire Dept. [Signature]
Health Dept. _____
Appeal Board _____
Other _____
Department Name _____

[Signature]
Director - Building & Inspection Services

PENALTY FOR REMOVING THIS CARD

City of Portland, Maine - Building or Use Permit Application

389 Congress Street, 04101 Tel: (207) 874-8703, Fax: (207) 874-8716

Permit No: 04-1088	Issue Date: AUG 20 2004	CBL: 053 D007001
-----------------------	----------------------------	---------------------

Location of Construction: 2 Bramhall St	Owner Name: Maine Medical Center	Owner Address: 22 Bramhall St	Phone:
Business Name:	Contractor Name: Langford & Low, Inc.	Contractor Address: PO Box 662 Portland	Phone: 2077975141
Lessee/Buyer's Name	Phone:	Permit Type: Commercial	Zone: 2-10

Past Use: Hospital	Proposed Use: Renovate 7th flr patient rooms Richards Wing.	Permit Fee: \$1,101.00	Cost of Work: \$119,928.00	CEO District: 2
Proposed Project Description: Renovate 7th flr patient rooms Richards Wing.		FIRE DEPT: <input checked="" type="checkbox"/> Approved <input type="checkbox"/> Denied	INSPECTION: Use Group: I-2 Type: 2A 8/20/04 Signature: <i>[Signature]</i>	
		Signature: <i>[Signature]</i>	Signature: <i>[Signature]</i>	
PEDESTRIAN ACTIVITIES DISTRICT (P.A.D.)				
Action: <input type="checkbox"/> Approved <input type="checkbox"/> Approved w/Conditions <input type="checkbox"/> Denied				
Signature: _____ Date: _____				

Permit Taken By: Idobson	Date Applied For: 08/02/2004	Zoning Approval		
-----------------------------	---------------------------------	------------------------	--	--

<ol style="list-style-type: none"> This permit application does not preclude the Applicant(s) from meeting applicable State and Federal Rules. Building permits do not include plumbing, septic or electrical work. Building permits are void if work is not started within six (6) months of the date of issuance. False information may invalidate a building permit and stop all work.. 	<div style="font-size: 2em; color: red; opacity: 0.5; pointer-events: none;">EXPIRED</div>	Special Zone or Reviews <input type="checkbox"/> Shoreland <input type="checkbox"/> Wetland <input type="checkbox"/> Flood Zone <input type="checkbox"/> Subdivision <input type="checkbox"/> Site Plan Maj <input type="checkbox"/> Minor <input type="checkbox"/> MMT <input type="checkbox"/> Date: <i>8/1/04</i>	Zoning Appeal <input type="checkbox"/> Variance <input type="checkbox"/> Miscellaneous <input type="checkbox"/> Conditional Use <input type="checkbox"/> Interpretation <input type="checkbox"/> Approved <input type="checkbox"/> Denied Date: _____	Historic Preservation <input checked="" type="checkbox"/> Not in District or Landmark <input type="checkbox"/> Does Not Require Review <input type="checkbox"/> Requires Review <input type="checkbox"/> Approved <input type="checkbox"/> Approved w/Conditions <input type="checkbox"/> Denied Date: <i>[Signature]</i>
---	--	--	---	---

CERTIFICATION

I hereby certify that I am the owner of record of the named property, or that the proposed work is authorized by the owner of record and that I have been authorized by the owner to make this application as his authorized agent and I agree to conform to all applicable laws of this jurisdiction. In addition, if a permit for work described in the application is issued, I certify that the code official's authorized representative shall have the authority to enter all areas covered by such permit at any reasonable hour to enforce the provision of the code(s) applicable to such permit.

SIGNATURE OF APPLICANT	ADDRESS	DATE	PHONE
RESPONSIBLE PERSON IN CHARGE OF WORK. TITLE		DATE	PHONE

04/06/09

Expired permit. No one called for
refinance TRSP.

City of Portland, Maine - Building or Use Permit

389 Congress Street, 04101 Tel: (207) 874-8703, Fax: (207) 874-8716

Permit No: 04-1088	Date Applied For: 08/02/2004	CBL: 053 D007001
-----------------------	---------------------------------	---------------------

Location of Construction: 2 Bramhall St	Owner Name: Maine Medical Center	Owner Address: 22 Bramhall St	Phone:
Business Name:	Contractor Name: Langford & Low, Inc.	Contractor Address: PO Box 662 Portland	Phone (207) 797-5141
Lessee/Buyer's Name	Phone:	Permit Type: Commercial	

Proposed Use: Renovate 7th flr patient rooms Richards Wing.	Proposed Project Description: Renovate 7th flr patient rooms Richards Wing.
--	--

Dept: Zoning	Status: Approved	Reviewer: Marge Schmuckal	Approval Date: 08/01/2004	Note:	Ok to Issue: <input checked="" type="checkbox"/>
Dept: Building	Status: Approved	Reviewer: Mike Nugent	Approval Date: 08/20/2004	Note:	Ok to Issue: <input checked="" type="checkbox"/>
Dept: Fire	Status: Approved with Conditions	Reviewer: Lt. MacDougal	Approval Date: 08/04/2004	Note:	Ok to Issue: <input checked="" type="checkbox"/>

- 1) a fire watch shall be posted for the duration of the construction per the state fire marshal
- 2) the fire alarm system shall be installed in accordance with NFPA 72 standards
- 3) Application requires State Fire Marshal approval.


All Purpose Building Permit Application

If you or the **property** owner owes real estate or personal property taxes or user charges on any property within the City, payment arrangements must be made before permits of any kind are accepted.

Location/Address of Construction: From <u>22 BRANMALL STREET</u>		
Total Square Footage of Proposed Structure	Square Footage of Lot	
Tax Assessor's Chart, Block & Lot Chart# Block# Lot# <u>D</u> <u>7</u>	Owner: <u>Maine Medical Center</u> <u>22 Bramhall Street</u> <u>Portland, Me. 04101</u>	Telephone: <u>871-4118</u>
Lessee/Buyer's Name (If Applicable)	Applicant name, address & telephone: <u>Langford & Low, Inc</u> <u>Portland, Me. 04104.</u>	cost Of Work: <u>\$ 119,928</u> Fee: <u>\$ 1101, 00/10</u>
Current use: <u>Patient Rooms.</u>		
If the location is currently vacant, what was prior use: _____		
Approximately how long has it been vacant: _____		
Proposed use: <u>Patch paint Exhange some minor renovations,</u> Project description: <u>7th Flr. Richards Wing -</u>		
Contractor's name, address & telephone: <u>Langford & Low, Inc. 248 Warren Ave.</u> <u>Portland, Me. 04104.</u>		
Who should we contact when the permit is ready: <u>Cys Doughton</u>		
Mailing address: <u>248 Warren Ave.</u> <u>3180546</u> <u>Portland, Maine 04104.</u>		
We will contact you by phone when the permit is ready. You must come in and pick up the permit and review the requirements before starting any work, with a Plan Reviewer. A stop work order will be issued and a \$100.00 fee if any work starts before the permit is picked up, PHONE: 797-5141		

IF THE REQUIRED INFORMATION IS **NOT** INCLUDED IN THE SUBMISSIONS THE PERMIT WILL BE AUTOMATICALLY DENIED AT THE DISCRETION OF THE BUILDING/PLANNING DEPARTMENT, WE MAY REQUIRE ADDITIONAL INFORMATION IN ORDER TO APPROVE THIS PERMIT.

I hereby certify that I am the Owner of record of the named property, or that the owner of record authorizes the proposed work and have been authorized by the owner to make this application as his/her authorized agent. I agree to conform to all applicable laws of this jurisdiction. In addition, if a permit for work described in this application is issued, I certify that the Code Official's authorized representative shall have the authority to enter all areas covered by this permit at any reasonable hour to enforce the provisions of the codes applicable to this permit.

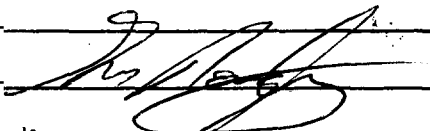Signature of applicant:  Date: 7-30-04.

This is NOT a permit, you may not commence ANY work until the permit is Issued.
If you are in a Historic District you may be subject to additional permitting and fees with the Planning Department on the 4th floor of City Hall

WINTON SCOTT ARCHITECTS

F a x T r a n s m i t t a l

TO: Michael Nugent

FROM: Mark Wilcox

date: 8/19/04

project: MMC R7 Renovation

pages: 4

Thanks for faxing these over.

- Mark

copy:

5 milk street portland, maine 04101 • tel 207 774 4811 • fax 207 774 3083



CITY OF PORTLAND
BUILDING CODE CERTIFICATE
389 Congress St., Room 315
Portland, Maine 04101

ACCESSIBILITY CERTIFICATE

Designer: Winton Scott Architects
Address of Project: 22 Bramhall St.
Nature of Project: Renovation of Maine Medical
Center Richards Wing
Seventh Floor (Cardiac)

The technical submissions covering the proposed construction work as described above have been designed in compliance with applicable referenced standards found in the Maine Human Rights Law and Federal Americans with Disability Act.


Signature: *Mark M. Wilcox*

Title: PRINCIPAL

Firm: Winton Scott Architects

Address: 5 Milk St.
Portland, ME 04101

Phone: 774-481

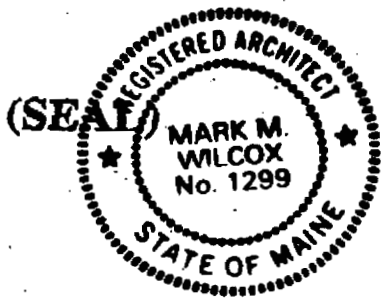



CITY OF PORTLAND
BUILDING CODE CERTIFICATE
389 Congress St., Room 315
Portland, Maine 04101

TO: Inspector of Buildings City of Portland, Maine
Department of Planning & Urban Development
Division of Housing & Community Service

FROM: Winton Scott Architects, Mark Wilcox


RE: Certificate of Design

DATE: 8/19/04

These plans and / or specifications covering construction work on:

Maine Medical Center R7 Renovations

Have been designed and drawn up by the undersigned, a Maine registered Architect / Engineer according to the BOCA National Building Code / 1999 (Fourteenth Edition) and local amendments.

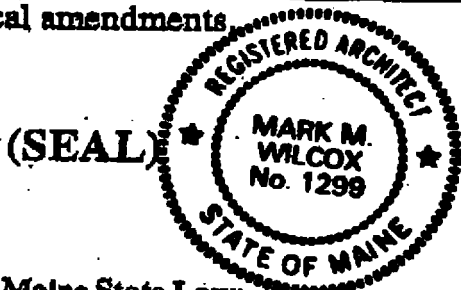

Signature: Mark Wilcox

Title: PRINCIPAL

Firm: Winton Scott Architects

Address: 5 Milk St.
Portland, ME 04101

As per Maine State Law:
\$50,000.00 or more in new construction, repair expansion, addition, or modification for Building or Structures, shall be prepared by a registered design Professional.



CITY OF PORTLAND
BUILDING CODE CERTIFICATE
389 Congress St., Room 315
Portland, Maine 04101

TO: Inspector of Buildings City of Portland, Maine
Department of Planning & Urban Development
Division of Housing & Community Service

FROM DESIGNER: Mark Wilcox, Winton Scott Architects
5 Milk St. Portland, ME 04101

DATE: 8/19/04

Job Name: MMC R7 Renovation

Address of Construction: 22 Bramhall St. Portland, ME 04102

THE BOCA NATIONAL BUILDING CODE / 1999 (FOURTEENTH EDITION)

Construction project was designed according to the building code criteria listed below:

Building Code and Year Boca '99 Use Group Classification(s) I-2

Type of Construction 2A

Structural Systems

Roof Snow Load N.A.
_____ Ground Snow Load (P_g)
_____ If $P_g > 10$ psf, Flat Roof snow load, P_f
_____ If $P_g > 10$ psf, snow exposure factor, C_e
_____ If $P_g > 10$ psf, roof thermal factor
_____ If $P_g > 10$ psf, snow load importance factor, I
_____ Sloped Roof Snowload P_s

Earthquake Loads N.A.
_____ Peak velocity-related acceleration, A_v
_____ Peak acceleration, A_p
_____ Seismic hazard exposure group
_____ Seismic performance category
_____ Soil profile type
_____ Basic structural system / seismic-resisting system
_____ Response modification factor, R , and deflection amplification factor, C_d

_____ The documents must account for Drift snow load, unbalanced snow load and Sliding snow loads as required.


Wind Loads N.A.
_____ Basic Wind Speed _____ Internal Pressure Coefficient
_____ Wind Exposure Category _____ Wind Design Pressure _____ Wind Importance Factor

Richards Wing Renovations

Seventh Floor

Main Medical Center

Portland, Maine 04102

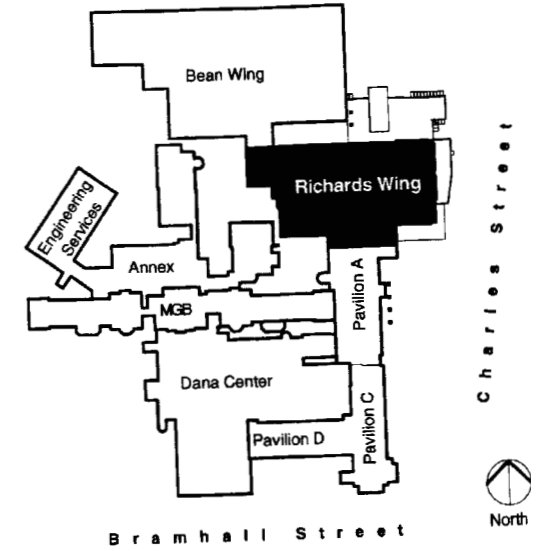

Architect

Winton Scott Architects
5 Milk Street
Portland, Maine 04101
207-774-4811

Mechanical Engineer

Mechanical Systems Engineers
Royal River Center Unit #10
10 Forest Falls Drive
Yarmouth, Maine 04096
207-846-1441

Electrical Engineer

Bartlett Design
942 Washington Street
Bath, Maine 04530
207-443-5447



Abbreviations

AB	Anchor Bolt	CEM	Cement	DWG	Drawing	GWB	Gypsum Wall	KIT	Kitchen	NOM	Nominal	REFR	Refrigerator	THK	Thick
ABV	Above	CI	Cast Iron	EA	Each	GYPBD	Gypsum Board	LAM	Laminated	NTS	Not To Scale	REIN	Reinforce, Reinforcing	THR	Threshold
ACT	Acoustical Ceiling Tile	CJ	Control	EL	Elevation	HC	Handicapped, Hollow Core	LAV	Lavatory	OA	Overall	REOD	Required	THRU	Through
ADJ	Adjustable, Adjacent	CL	Center Line	ELEC	Electrical	HDF	High Density Fiberboard	LF	Linear Feet	OC	On Center	RL	Rain Leader	TOC	Top of
AFF	Above Finished Floor	CLG	Ceiling	ELEV	Elevator, Elevation	HDW	Hardware	LP	Low Point	OD	Outside	RM	Room	TOS	Top Of
AHU	Air Handling	CLO	Close	ED	Equal	HDWD	Hardwood	LPL	Low Pressure Laminate	OH	Overhead	RD	Rough	TP	Toilet
ALT	Alternate	CLR	Clear	EXH	Exhaust	HM	Hollow	MAS	Masonry	OPNG	Opening	RUB	Rubber	TR	Tack Rail
ALUM	Aluminum	CMT	Ceramic Mosaic	EXIST	Existing	HORIZ	Horizontal	MAT	Material	OPP	Opposite	SC	Solid Core	TYP	Typical
AP	Access	CMU	Concrete Masonry Unit	EXP	Expansion	HP	High Point	MAX	Maximum	OS	Outside	SECT	Section	T&B	Top And
ARCH	Architectural	COL	Column	EXT	Exterior	HPDL	High Pressure Decorative Laminate	MDF	Medium Density Fiberboard	PARTN	Partition	SF	Square Feet	T&G	Tongue And Groove
Ⓐ	At	COMP	Compressible	FC	Fire Code	HR	Hour	MDO	Medium Density Overlay	PB	Particle Board	SH	Shelf	UC	Undercut
B	Basement,	CONC	Concrete	FCH	Furring	HT	Height	MECH	Mechanical	SHTH	Sheathing	UV	Unit	V	Ventilator
BB	Bulletin	CONST	Construction	FD	Floor Drain	HTG	Heating	MFR	Manufacturer	SM	Similar	V	Vinyl, Vent	VB	Vapor
BD	Board	CONT	Continuous	FE	Fire	HW	Hot Water	MH	Man Hole	SPECS	Specifications	VCT	Vinyl Composition Tile	VCT	Vinyl Composition Tile
BET	Between	COORD	Coordinate	FFE	Finish Floor Elevation	ID	Inside	MIN	Minimum	SC	Square	VERT	Vertical, Vertically	VEST	Vestibule
BEV	Beveled	CPT	Carpet	FN	Finished	INCL	Inclusive	MIR	Mirror	SST	Stainless	STD	Standard	VWC	Vinyl Wall Covering
BIT	Bituminous	CTSK	Countersunk	FL	Flush	INS	Insulation	MSC	Miscellaneous	STD	Standard	STRUC	Structure	WB	White Board
BLDG	Building	CUH	Cabinet Unit	FLR	Floor	INT	Interior	MLDG	Molding	PT	Pressure	SUP	Support	WC	Water
BLKG	Blocking	HTR	Heater	FLSHG	Flashing	INV	Invert	MO	Masonry	PTD	Painted	SUSP	Suspended	WD	Wood
BM	Bench Mark,	DBL	Double	FSR	Flexible Sheet Roofing	IS	Inside	MR	Moisture	QT	Quarry Tile	SYM	Symmetrical	W/	With
BOT	Bottom	DF	Drinking	GA	Gauge	JC	Janitors	MTG	Mounted,	R	Radius,	T	Tread	W/O	Without
BRK	Brick	DH	Double Hung	GALV	Galvanized	JST	Joist it	MTL	Metaling	RAD	Radius	RC	Resilient		
C	Course	DIA	Diameter	GB	Grab Bar	JT	Joint	NAT	Natural	RD	Roof Drain	REF	Reference		
CAB	Cabinet	DIM	Dimension	GC	General			NC	Not In						
CAP	Capacity	DRW	Drawer	GL	Glassactor			NO	Number						
CB	Chalk Board, Catch Basin	DTL	Detail												
		DW	Dishwasher												

Release Date: **MAY 28, 2004**

Drawing List

Sheet Name	Number
Phasing Plan	PH 1
Demolition Plan	D 1
Overall Floor Plan	A 1
Enlarged Floor Plans by Base Bid	A 2.1
Staff Facilities by Alternate #2	A 2.2
Interior Elevations	A 3.1
Interior Elevations	A 3.2
Architectural Woodwork	A 4.1
Architectural Woodwork	A 4.2
Architectural Woodwork	A 4.3
Flooring Plan	A 5
Reflected Ceiling Plan by Base Bid	A 6.1
Reflected Ceiling Plan by Alternates	A 6.2
Finish Schedules and Partition Types	A 7
Door Schedules, Types & Details	A 8
Plumbing Demolition Plan	PD 1
New Plumbing Plan	P 1
Mechanical Demolition Plan	MD 1
New Mechanical Plan	MA 1
Electrical Demolition Plan	E 1
Lighting Plan	E 2
Power & Systems Plan	E 3

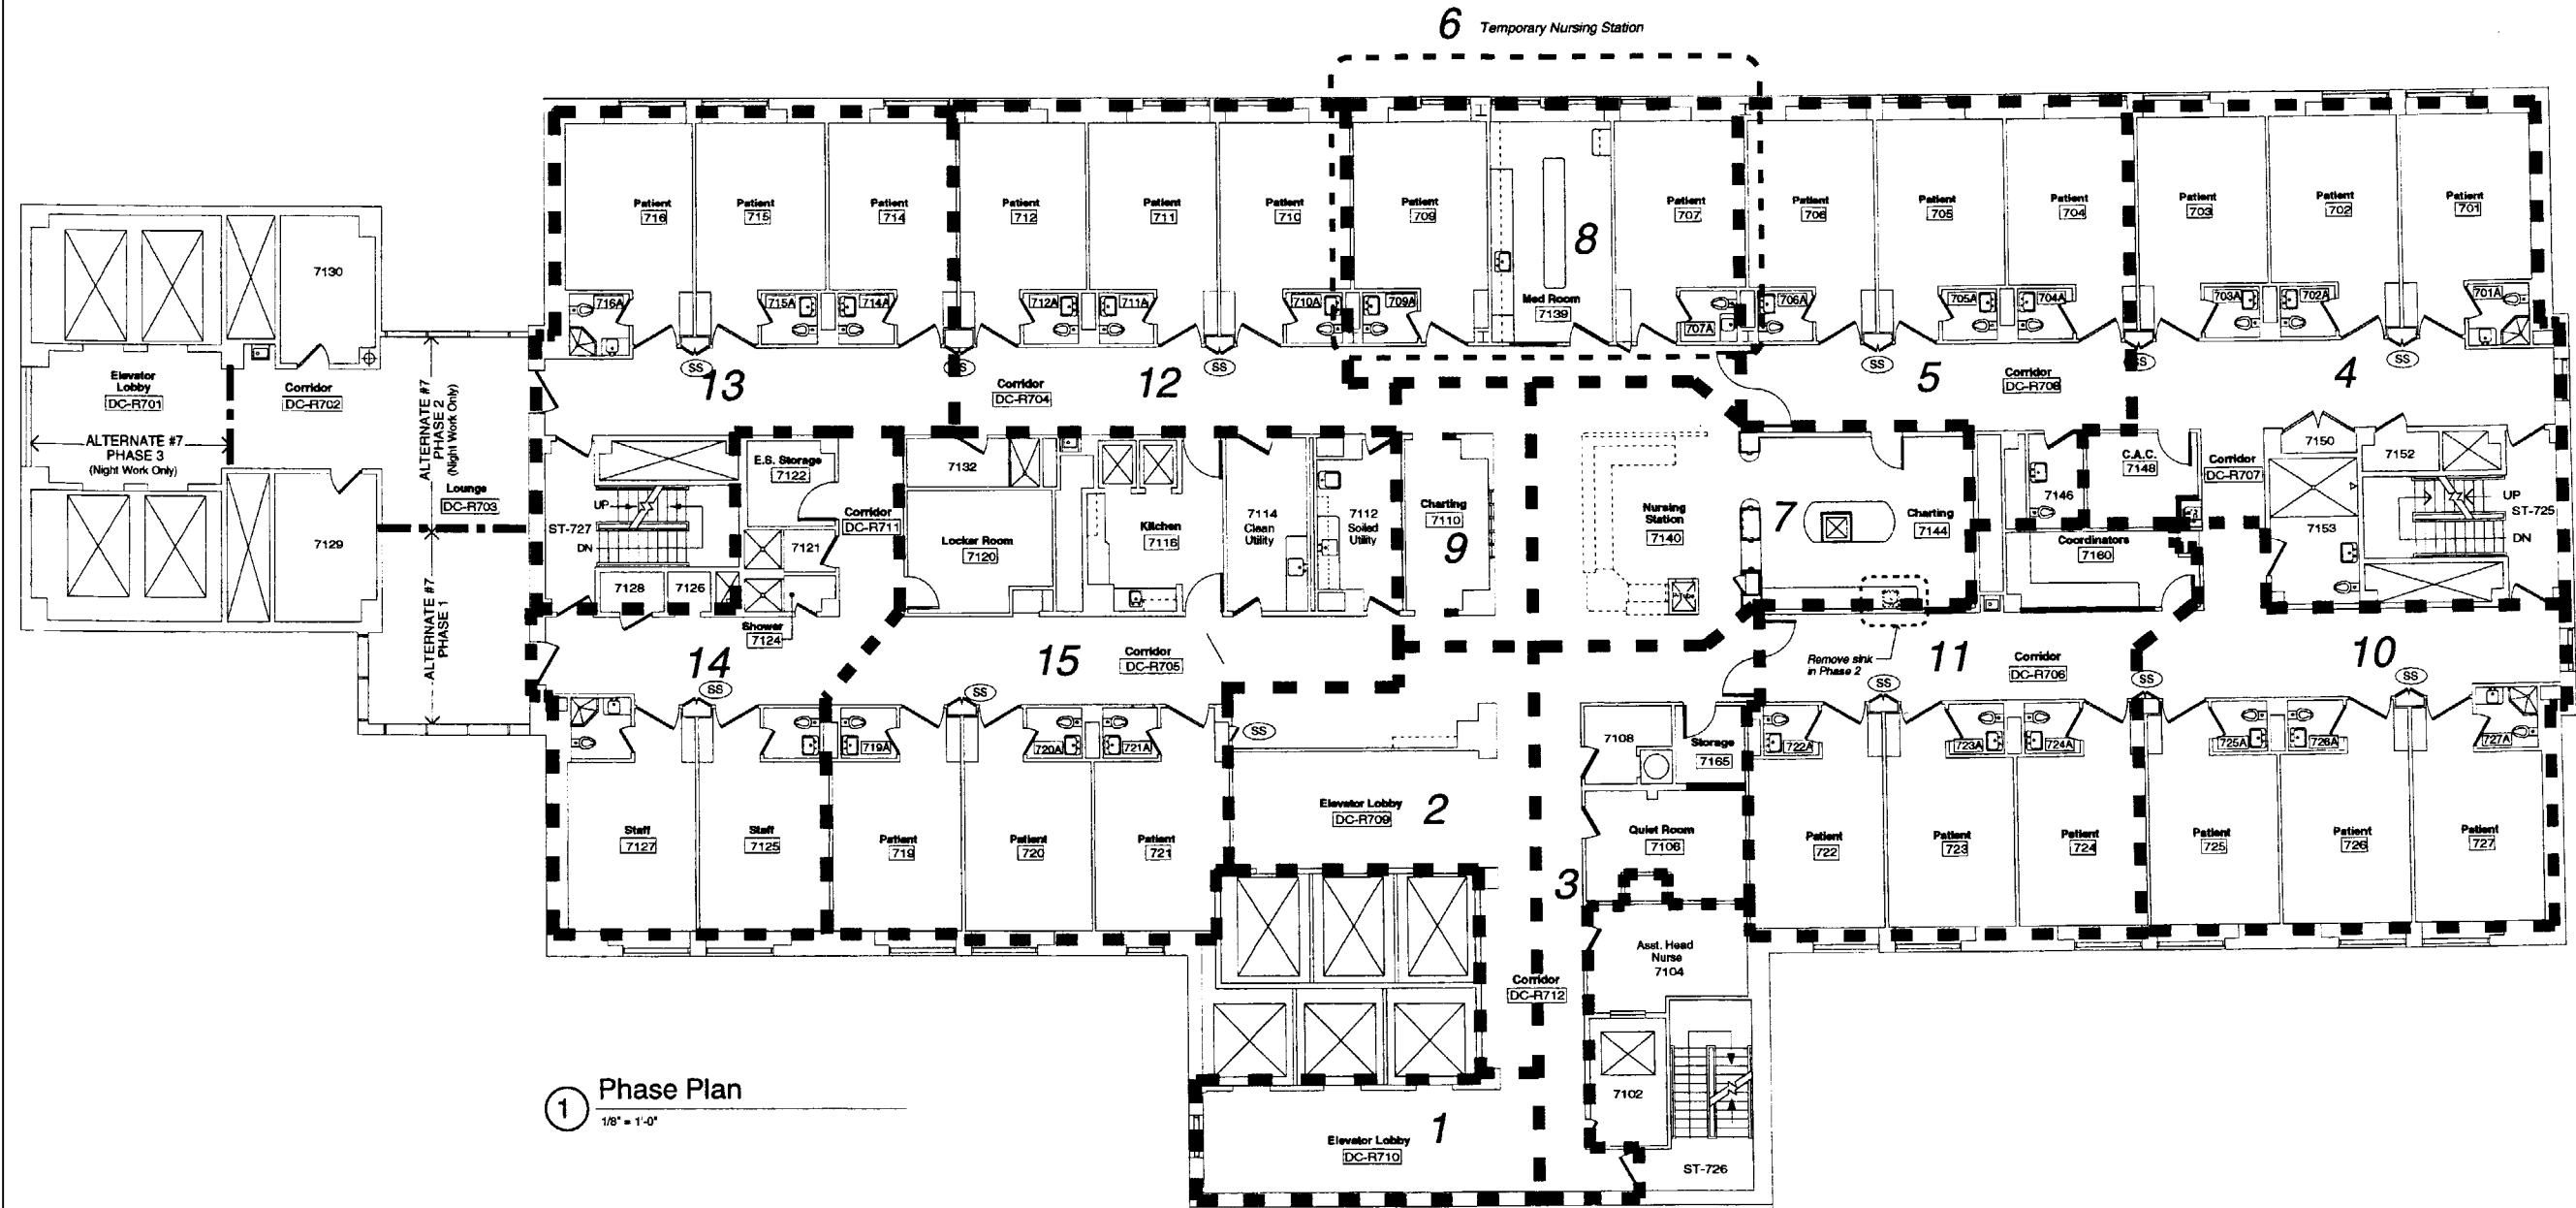

1 Phase Plan
1/8" = 1'-0"

LEGEND	
	Phasing Limit Line
9	Phase Number

GENERAL NOTE

1. Temporary partitions shall be provided and relocated as required by ACM contractor.

Richards Wing
Seventh Floor
Renovations

Maine Medical Center
Portland, Maine 04102


Architect
Winton Scott Architects
Portland, Maine

Mechanical Engineering
Mechanical Systems Engineers
Yarmouth, Maine


Electrical Engineering
Bartlett Design
Bath, Maine

Phasing Plan

PH 1

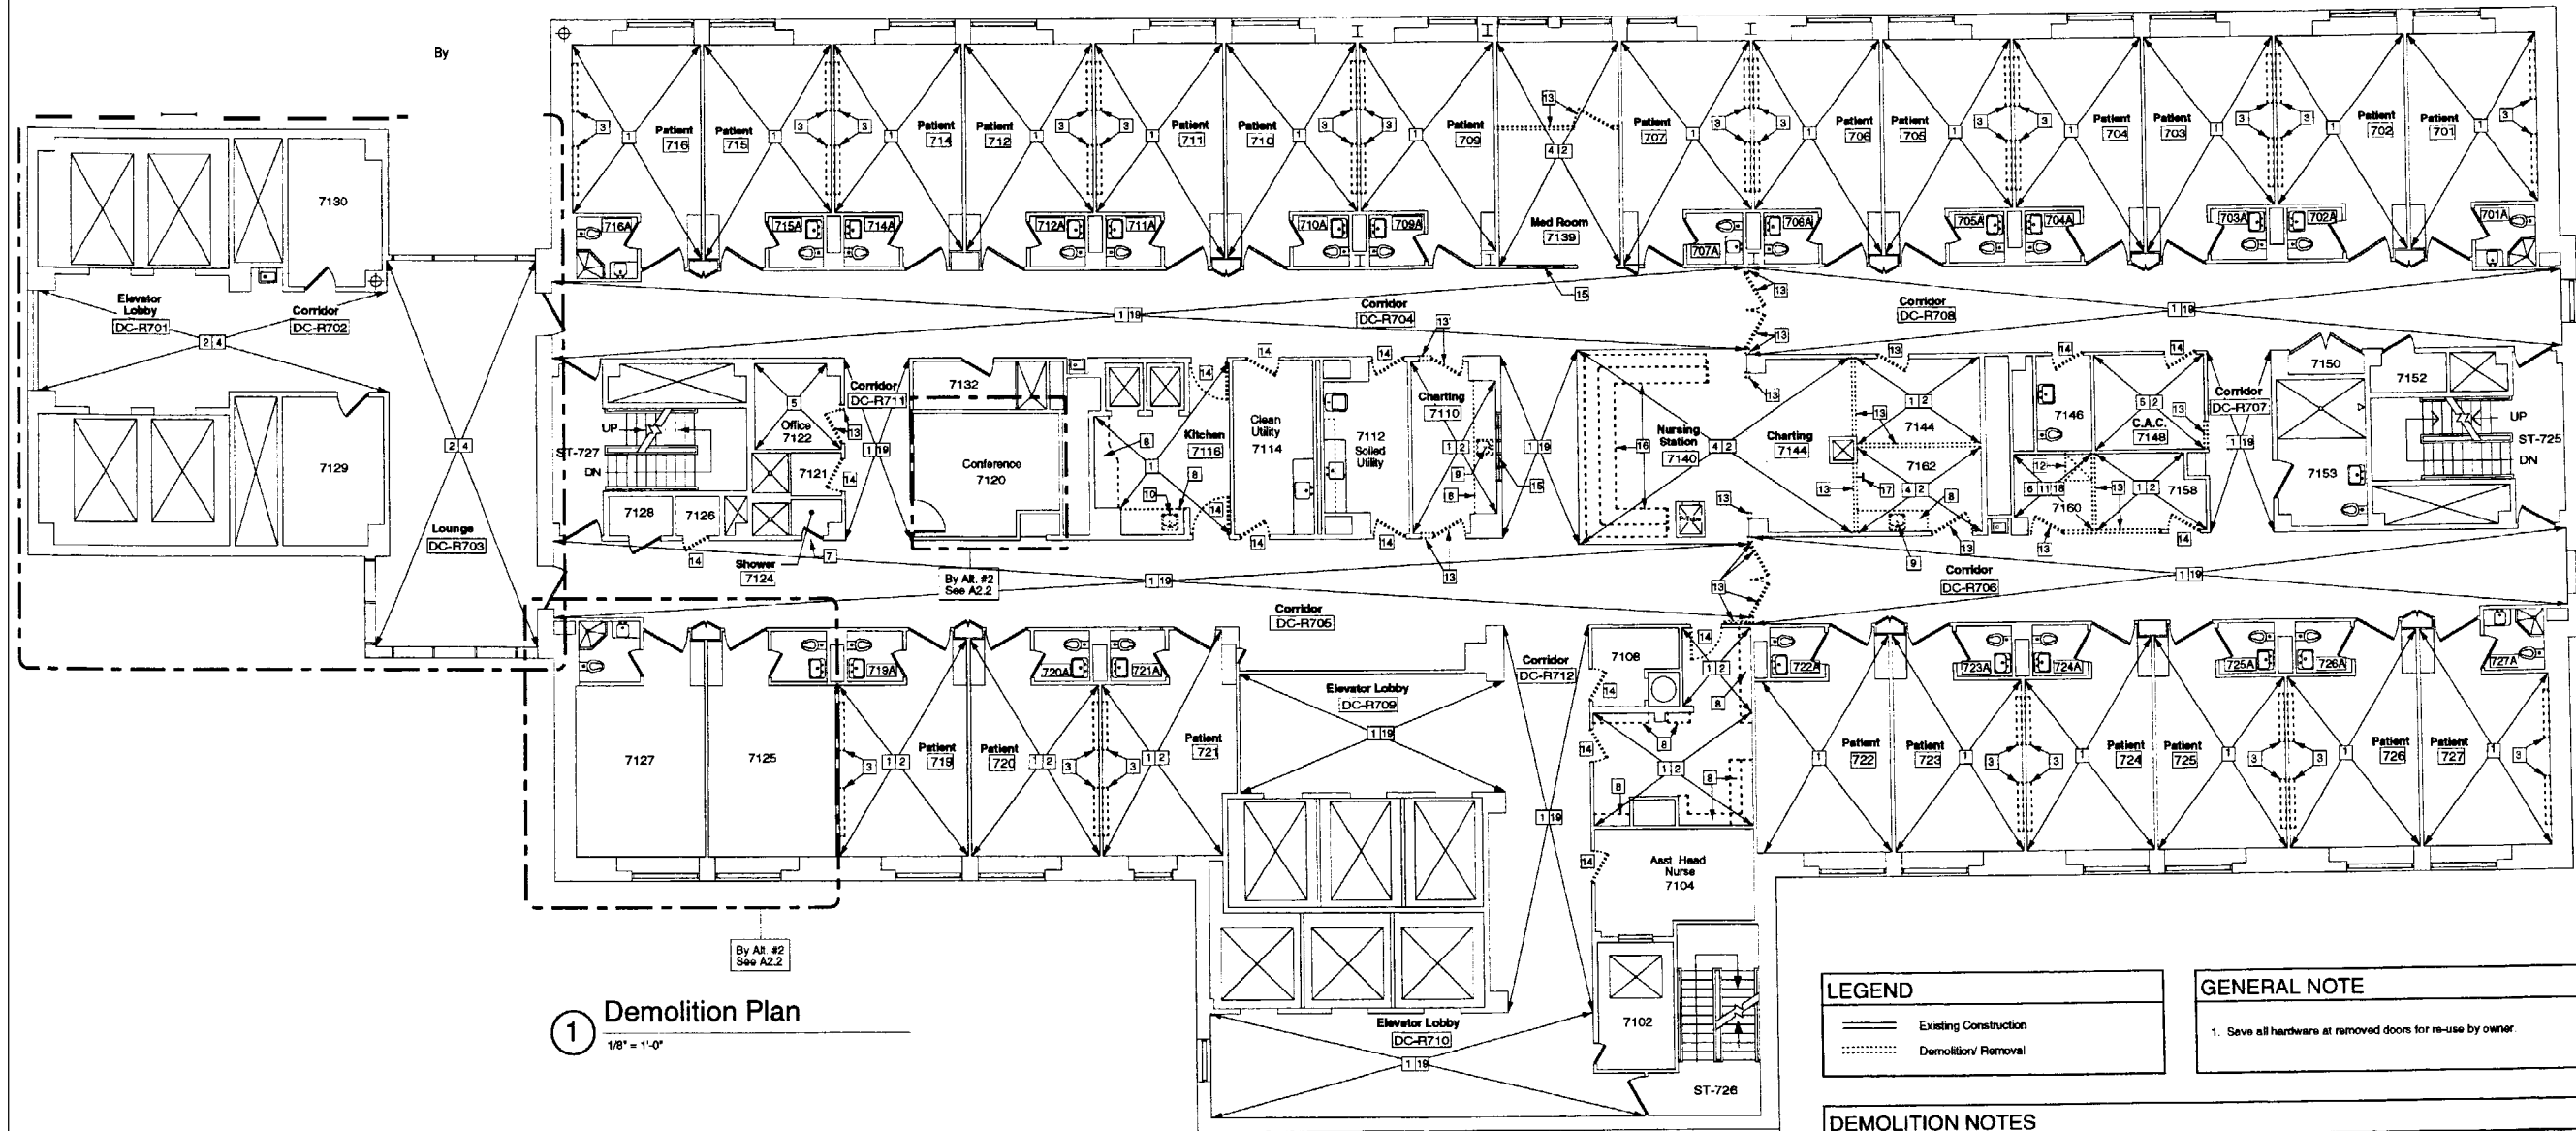

1 Demolition Plan
1/8" = 1'-0"



Richards Wing
Seventh Floor
Renovations

Maine Medical Center
Portland, Maine 04102

Architect
Winton Scott Architects
Portland, Maine

Mechanical Engineering
Mechanical Systems Engineers
Yarmouth, Maine

Electrical Engineering
Bartlett Design
Beth, Maine

Demolition
Plan

D 1


Scale: 1/8" = 1'-0"
May 28, 2004

LEGEND	
	Existing Construction
	Demolition/ Removal

GENERAL NOTE

1. Save all hardware at removed doors for re-use by owner.

- DEMOLITION NOTES**
- Existing VAT flooring with vinyl base to be removed by ACM contractor. Clean wall from any remaining glue residues and patch smooth. Prepare existing sub floor as needed for new VCT or sheet rubber flooring per finish schedule.
 - Existing ACT ceiling and grid to be removed by ACM contractor. Patch wall at removals to match existing by GC.
 - Remove existing headwall light fixture complete patch and paint plaster to match existing exactly.
 - Existing VCT flooring and wall base to be removed by ACM contractor. Clean wall from any remaining glue residues and patch smooth. Prepare existing subfloor as needed for the new VCT finish.
 - Existing CPT and wall base to be removed by ACM contractor. GC to clean any remaining glue residue on floor and wall, patch wall smooth. Prepare subfloor as needed for the new finish.
 - Remove existing floor tile. Prepare subfloor as needed for new flooring per finish schedule.
 - Remove existing ceramic tile as required to install new marble threshold per detail T3/ A8.
 - Remove existing built-in desk, shelving, or cabinetry complete. Patch adjacent floor and/ or walls as required for new finishes.
 - Remove existing plumbing fixtures. Cap plumbing and patch floor and/ or wall smooth for new finish.
 - Remove existing plumbing fixture. Relocate/ prepare existing plumbing as required for new plumbing fixture.
 - Remove existing wall tile. Prepare surface as required for new wall finish per finish schedule.
 - Remove existing shower stall. Cap plumbing and clean and prepare wall and floor for new finishes.
 - Remove existing construction complete with any base or molding. Remove or cut existing oak rail per enlarged floor plans and/or interior elevations. Door and door hardware to be removed by GC. Save hardware for re-use. Door frames to be removed by ACM contractor. Patch adjacent areas of removals to match existing by GC. Clean and prepare adjacent floor and walls for new finishes per finish schedule.
 - Remove door and hardware by GC. Save hardware for re-use. Refinish or replace door per door schedule. Verify existing frame preparation where new hardware required by door schedule.
 - Remove existing glass panels in preparation for new glass by Alternate # 5.
 - Remove existing systems furniture complete. Prepare floor as required for new floor finish.
 - Cap & remove existing oxygen bib & branch piping back to main. See plumbing drawings.
 - Remove existing plaster ceiling complete by ACM contractor. Patch wall at removal to match existing by GC.
 - Existing ACT ceiling & grid to be removed by ACM contractor by Alternate #1. Patch wall at removals to match existing by GC.

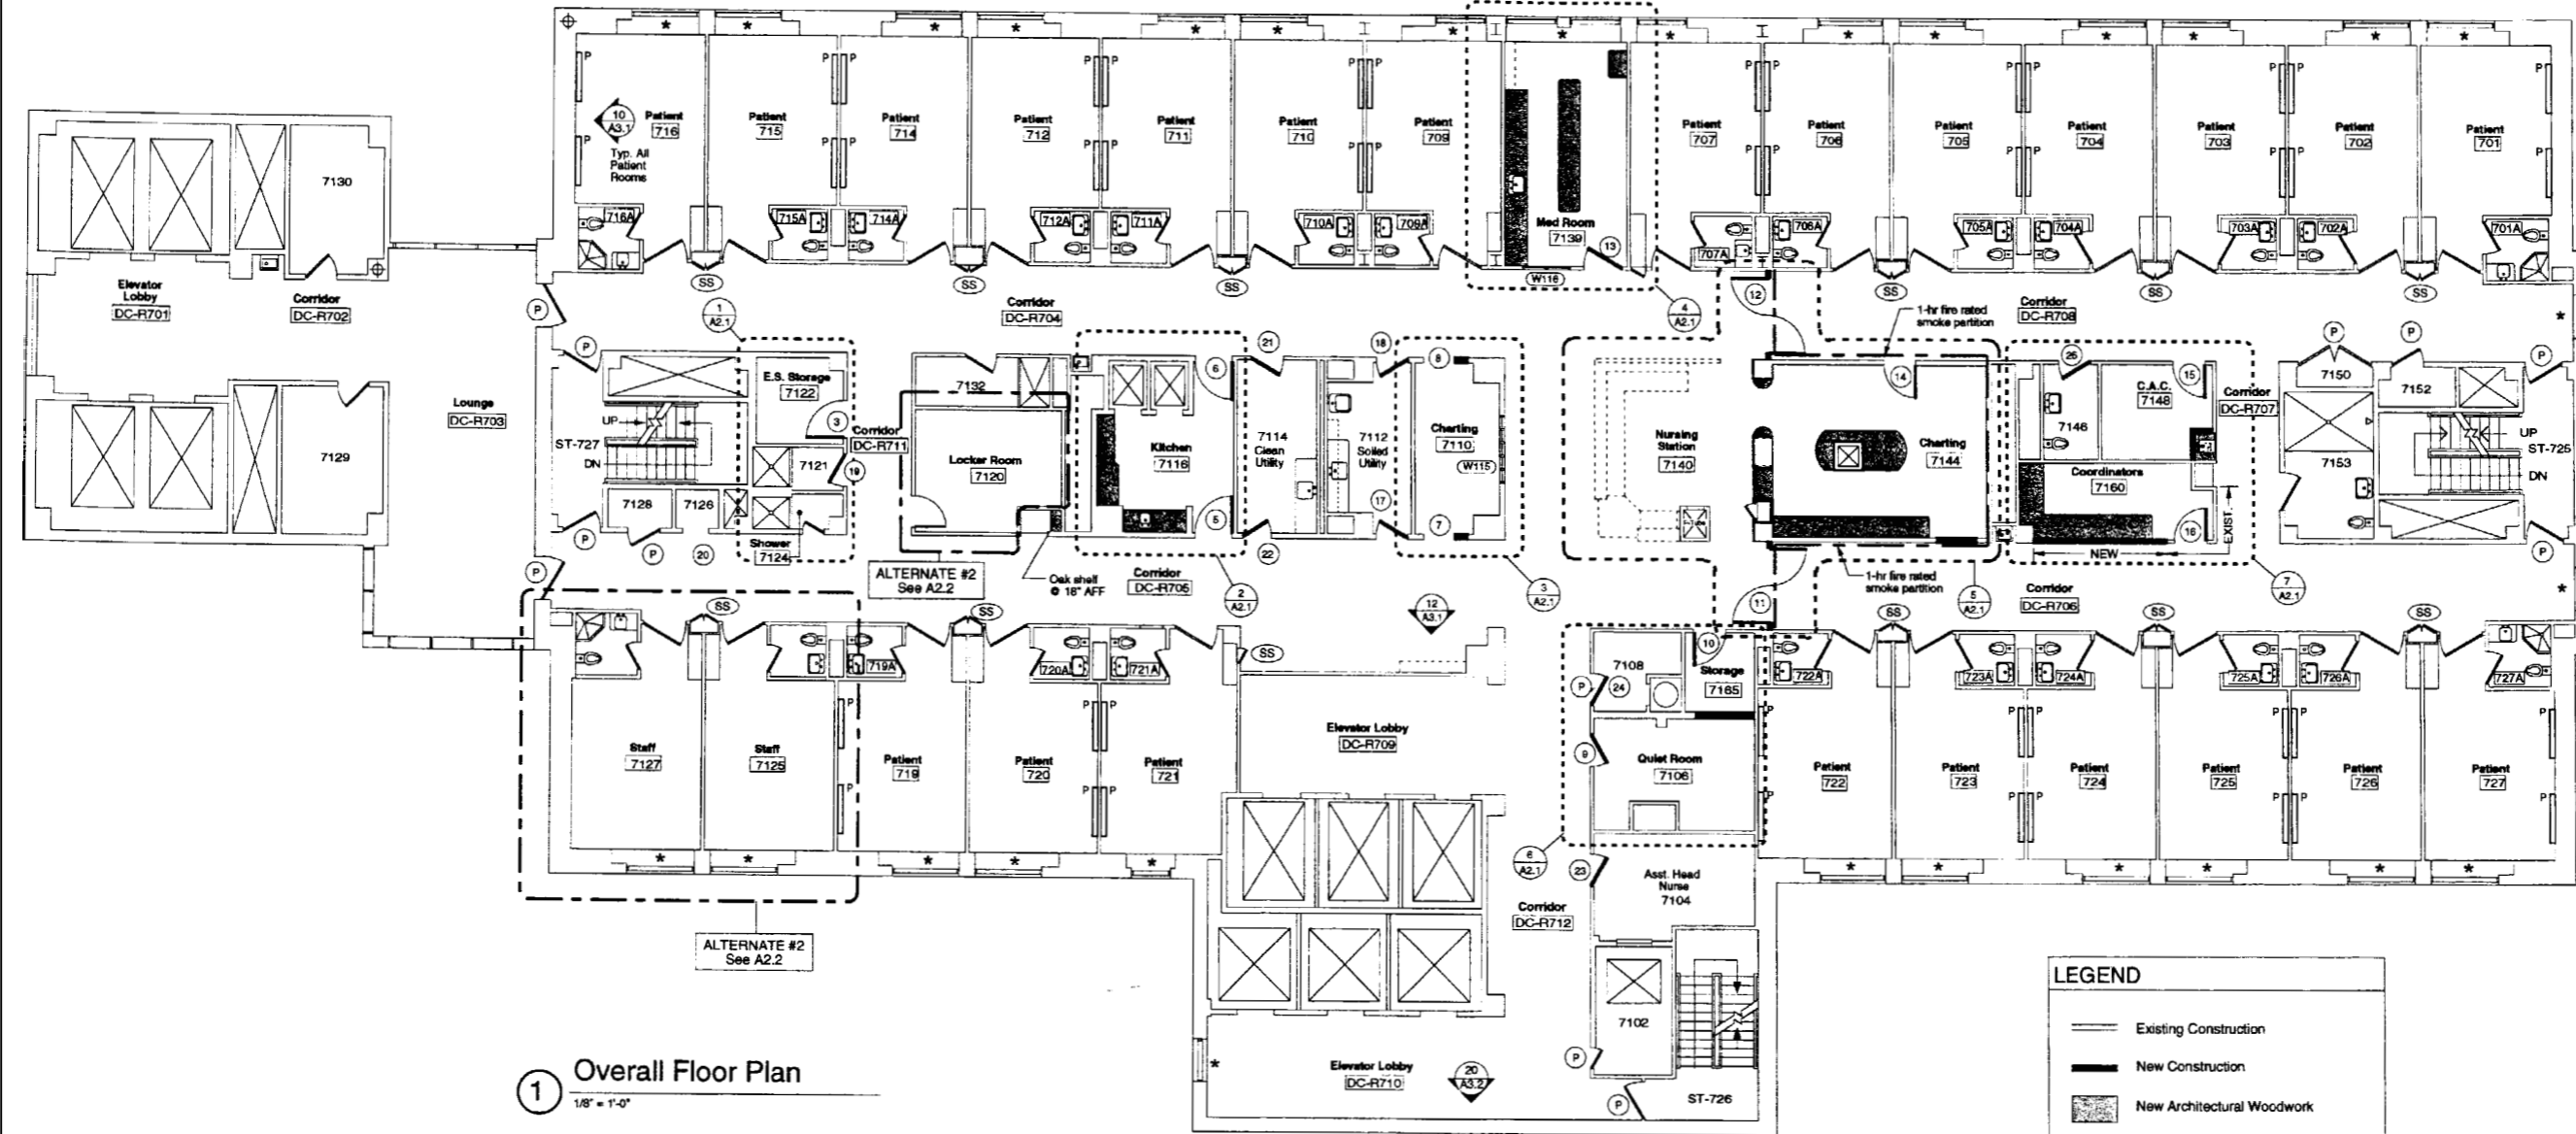

1 Overall Floor Plan
1/8" = 1'-0"

GENERAL NOTE
1. Paint all door frames

LEGEND	
	Existing Construction
	New Construction
	New Architectural Woodwork
	Fire rated smoke partition. Any penetrations must be sealed with fire caulking, typical
	New Plastic Laminate Window Sill by Alternate #6
	New Door by Base Bid
	Interior Window by Alternate #5
	Patch and paint plaster at removals of headwall light fixtures to match existing. Install new fixtures on painted poplar board. See elevation 10/A3.1
	Detail Tag
	Interior Elevation Tag
	Paint Existing HM Door
	Provide smoke seal brush at perimeter and astragal of existing pairs of 1'-6" x 6'-10" cabinet doors. See section 06710 Hardware Set HW9

Richards Wing
Seventh Floor
Renovations


Maine Medical Center
Portland, Maine 04102

Architect
Winton Scott Architects
Portland, Maine


Mechanical Engineering
Mechanical Systems Engineers
Yarmouth, Maine

Electrical Engineering
Bartlett Design
Bath, Maine


Overall
Floor Plan
A 1

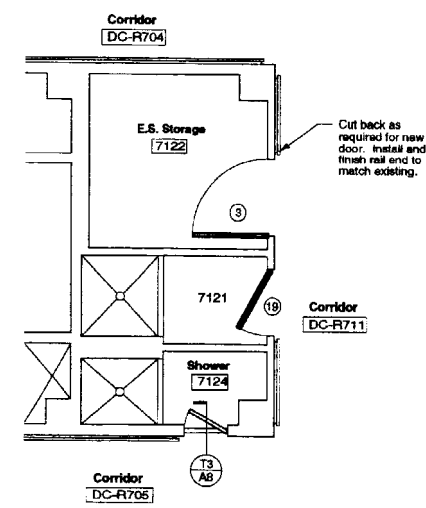


1 E.S. Storage & Shower
1/4" = 1'-0"

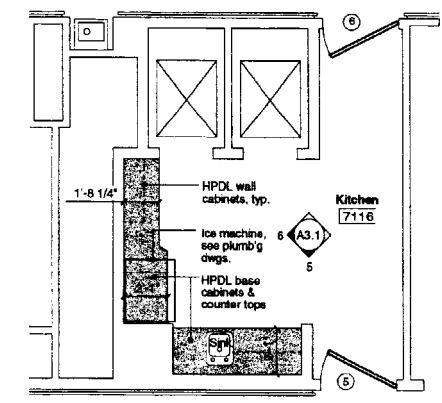


2 Kitchen
1/4" = 1'-0"

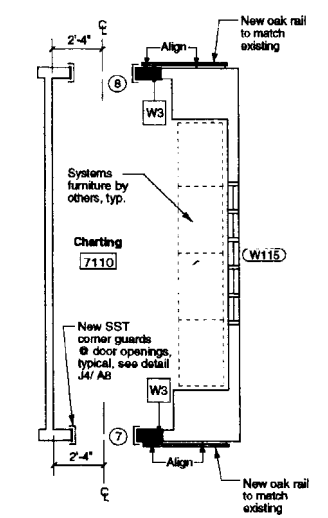


3 Charting
1/4" = 1'-0"

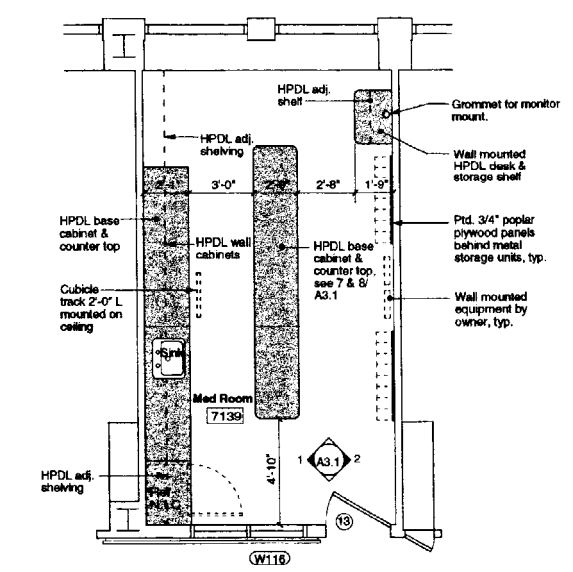


4 Med Room
1/4" = 1'-0"

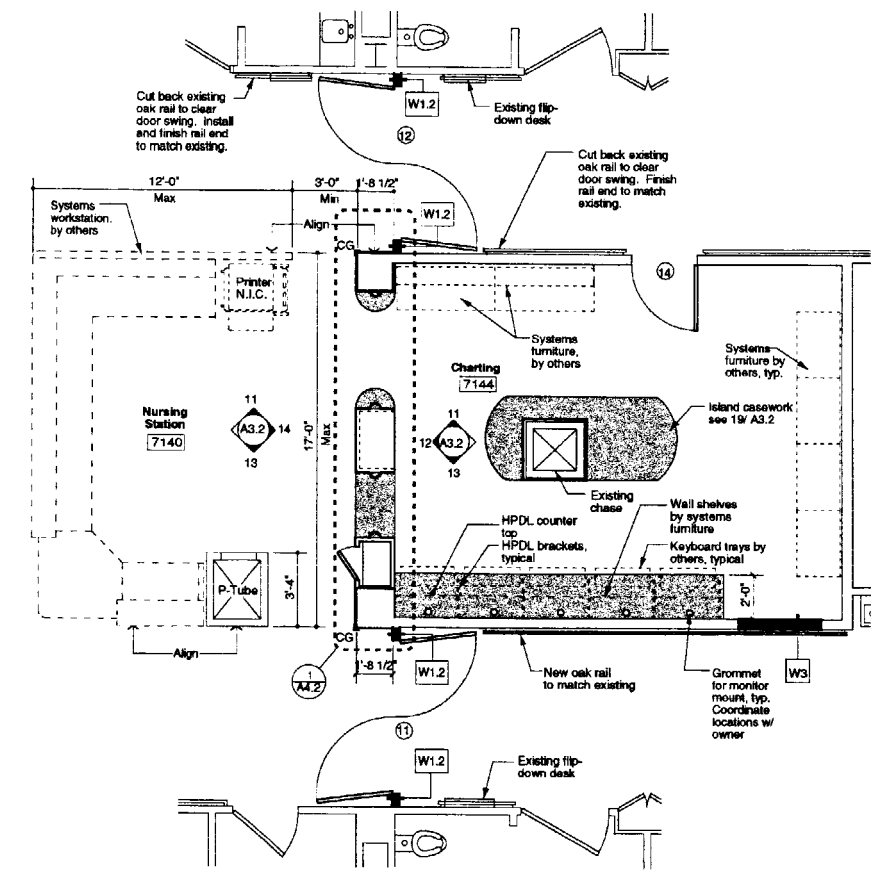

5 Nursing Station/ Charting
1/4" = 1'-0"

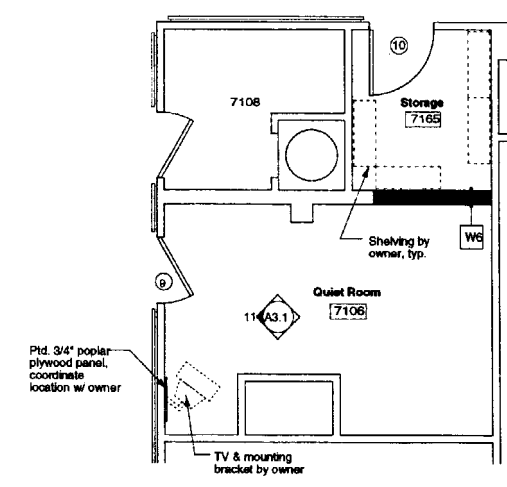

6 Quiet Room/ Storage
1/4" = 1'-0"

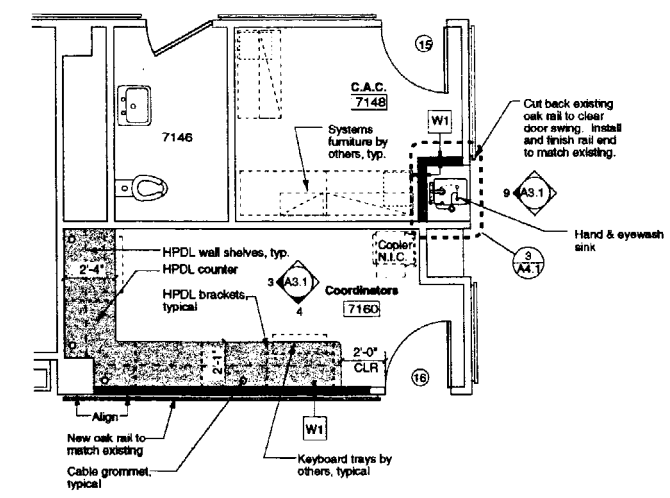

7 C.A.C./ Coordinators
1/4" = 1'-0"

LEGEND

- Existing Construction
- New Construction
- New Architectural Woodwork
- New Door by Base Bid
- ◌ Interior Window by Alternate #5
- Partition Type Key. See A7.
- x (AX.X) Interior Elevation Tag
- ⊙ (AX.X) Detail Tag

GENERAL NOTE

1. All dimensions are to F.O. new stud, F.O. existing finish, or F.O. casework, typical.

Richards Wing
Seventh Floor
Renovations

Maine Medical Center
Portland, Maine 04102

Architect
Winton Scott Architects
Portland, Maine

Mechanical Engineering
Mechanical Systems Engineers
Yarmouth, Maine

Electrical Engineering
Bartlett Design
Bath, Maine

Enlarged Floor
Plans by Base Bid
A 2.1



Richards Wing
Seventh Floor
Renovations

Maine Medical Center
Portland, Maine 04102

Architect
Winton Scott Architects
Portland, Maine


Mechanical Engineering
Mechanical Systems Engineers
Yarmouth, Maine

Electrical Engineering
Bartlett Design
Bath, Maine


Staff Facilities
by Alternate #2

A 2.2


Scale: As Shown
May 28, 2004




1 Staff Room Demo Plan
1/8" = 1'-0"




2 Locker Room Demo Plan
1/8" = 1'-0"




3A HC Toilet Flooring Plan
1/8" = 1'-0"

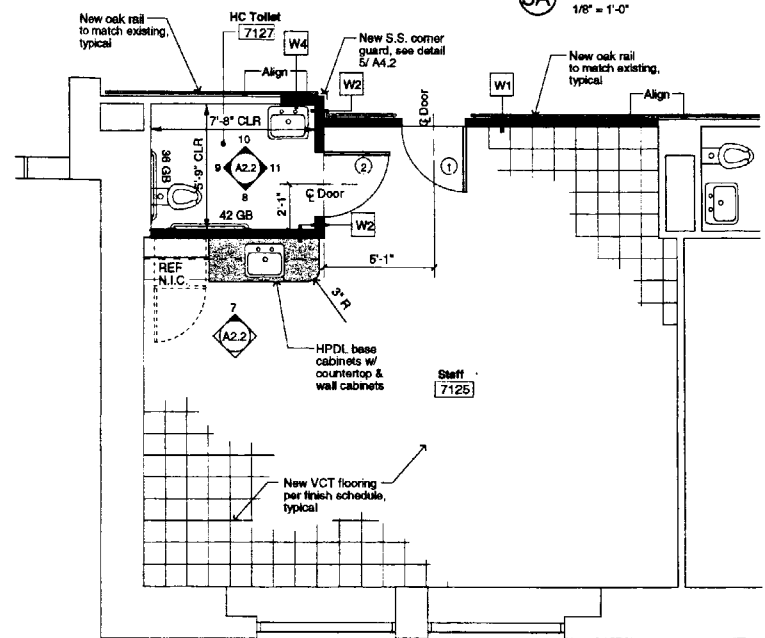


3 Staff Room
1/4" = 1'-0" ENLARGED PLAN

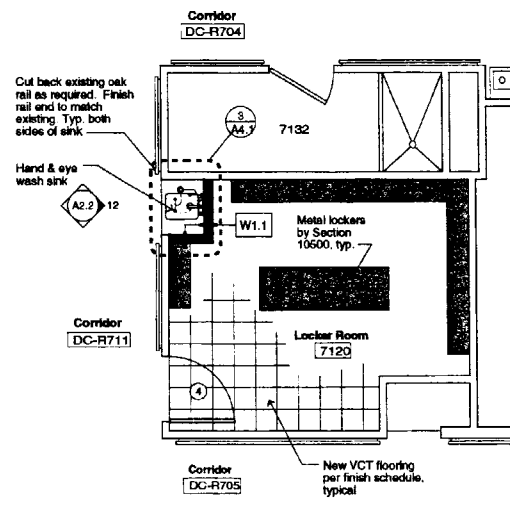


4 Locker Room
1/4" = 1'-0" ENLARGED PLAN

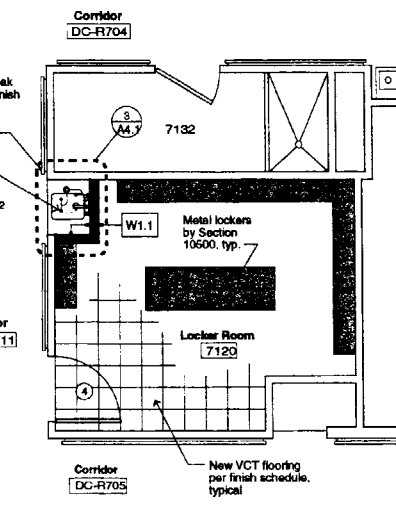

5 Reflected Ceiling Plan
1/8" = 1'-0" STAFF ROOM




6 Reflected Ceiling Plan
1/8" = 1'-0" LOCKER ROOM

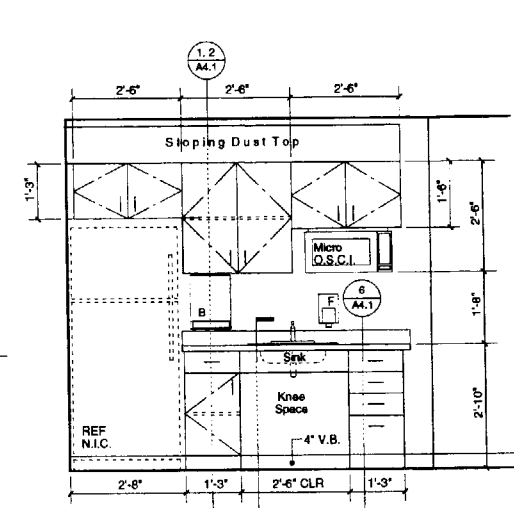


7 Staff Kitchenette
1/2" = 1'-0" North Elevation

Ceiling Plan Legend


- Proposed 2x2 ACT at 8'-0" AFF, U.N.O.
- Return Air Grille
- Recessed Fluorescent Light Fixture
- Supply Air Grille
- Sprinkler Head (By Separate Contract)

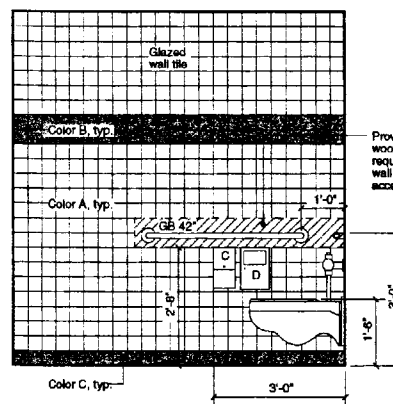


8 HC Toilet
1/2" = 1'-0" South Elevation

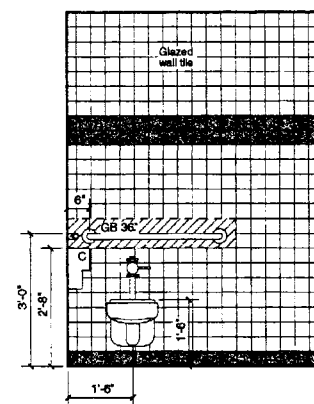


9 HC Toilet
1/2" = 1'-0" West Elevation

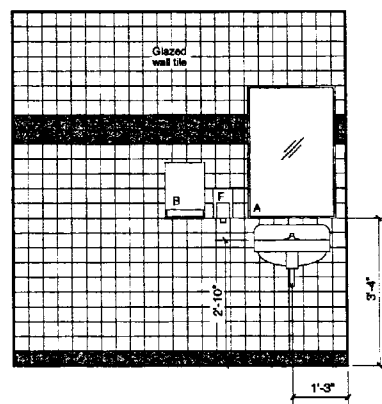

10 HC Toilet
1/2" = 1'-0" North Elevation

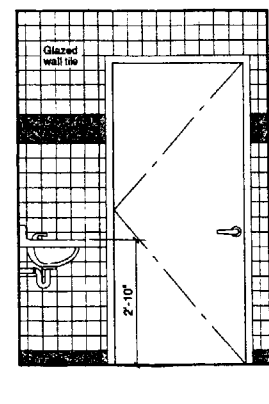

11 HC Toilet
1/2" = 1'-0" East Elevation

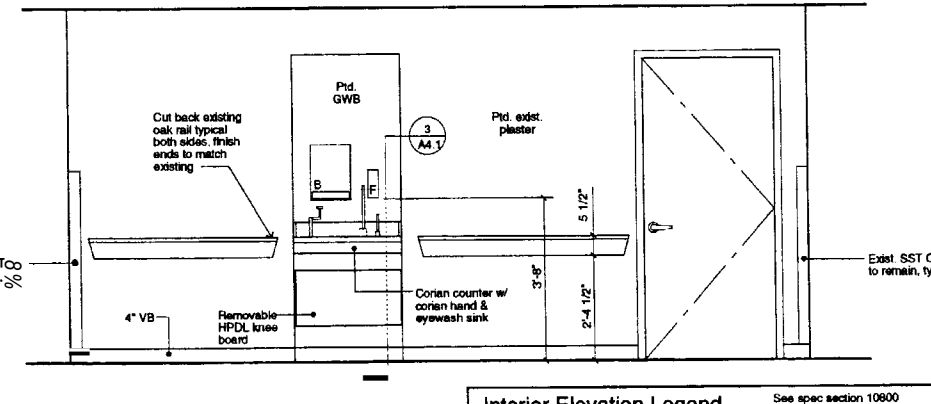

12 Hand/Eyewash Sink
1/2" = 1'-0" East Elevation

Interior Elevation Legend

See spec section 10800 for toilet accessories

O.S.C.I. Owner supplied, contractor installed

- A.....Mirror
- B.....Paper Towel Dispenser
- C.....Toilet Paper Dispenser
- D.....Sanitary Napkin Dispenser
- F.....Soap Dispenser by owner
- GB.....Grab Bar

Demolition Notes

- Existing VAT flooring with vinyl base to be removed by ACM contractor. Clean wall from any remaining glue residues and patch smooth. Prepare existing sub floor as needed for new VCT or sheet rubber flooring per finish schedule.
- Existing ACT ceiling and grid to be removed by ACM contractor. Patch wall at removals to match existing by GC.
- Existing CPT and wall base to be removed by ACM contractor. GC to clean any remaining glue residue on floor and wall, patch wall smooth. Prepare subfloor as needed for the new finish.
- Remove existing floor tile. Prepare subfloor as needed for new flooring per finish schedule.
- Remove existing built-in desk, shelving, or cabinetry complete. Patch adjacent floor and/or walls as required for new finishes.
- Remove existing plumbing fixtures. Cap plumbing and patch floor and/or wall smooth for new finish.
- Remove existing plumbing fixture. Relocate/prepare existing plumbing as required for new plumbing fixture.
- Remove existing wall tile. Prepare surface as required for new floor finish per finish schedule.
- Remove existing shower stall. Cap plumbing and clean and prepare wall and floor for new finishes.
- Remove existing construction complete with any base or molding. Remove or cut existing oak rail per enlarged floor plans and/or interior elevations. Door and frame to be removed by ACM contractor. Patch adjacent areas of removals to match existing by GC. Clean and prepare adjacent floor and walls for new finishes per finish schedule.
- Remove door and hardware only. Save hardware for reuse. Verify new hardware and existing frame preparation.

Legend

- Existing Construction
- Demolition/Removal

DOOR & FRAME SCHEDULE Note: Refer to sheet A8 for door & frame types and details

Door No.	Size (W x H)	Thickness	Door			Frame				Hardware	Threshold (See A8)	Label	Remarks	
			Material	Finish	Type (See A8)	Material	Finish	Type (See A8)	Head (See A8)					Jamb (See A8)
1	3'-0" x 6'-10"	1 3/4"	WD	NAT	D2	HM	PTD	F1	H1	J1	HW101	-	-	-
2	3'-0" x 6'-10"	1 3/4"	WD	NAT	D1	HM	PTD	F1	H2	J2	HW102	T2	-	1' undercut
4	3'-0" x 6'-10" (Field Verify)	1 3/4"	WD	NAT	D1	Exist HM	PTD	F1	-	-	HW101	-	60 min.	-

S & P Sand out all scratches, fill gouges and provide 2 coats satin polyurethane.

Exist WD Existing wood door.

Exist HM Existing metal door or frame.

PTD Painted

WD New wood door.

HM New metal door or frame.

Notes


- Field verify door sizes at all locations where new doors to be installed in existing door frames.

Finish Schedule


Room No.	Room Name	Floor Demo	Floor	Base	Walls	Ceiling	Cig. Ht.	Remarks
7125	Staff	D1	VCT	Vinyl	Ptd. Ex Plast./ Ptd. GWB	ACT	8'-0"	-
7127	HC Toilet	D4	Un glazed CT (See 3A/32.2)	Glazed CT	Glazed CT	ACT	8'-0"	-
7120	Locker Room	D3	VCT	Vinyl	Ptd. Ex Plast./ Ptd. GWB	ACT	8'-0"	-

Legend


- D1 Existing VAT removed by ACM Contractor by separate contract / Remove vinyl base and patch wall smooth
- D2 Existing VAT removed by ACM Contractor by separate contract / Remove vinyl base and patch wall smooth
- D3 Remove existing carpet / Remove vinyl base or wood base and patch wall smooth.
- D4 Remove existing ceramic tile

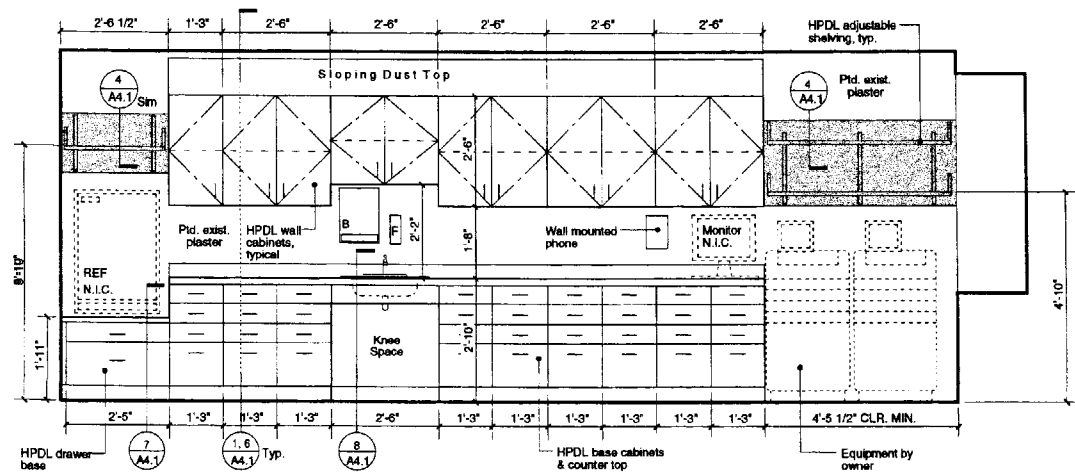


1 Med Room Room 7199
1/2" = 1'-0"
West Elevation

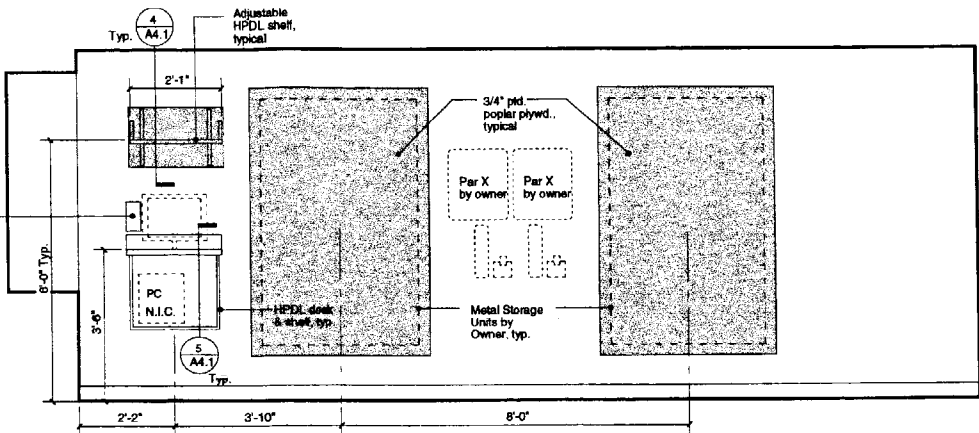


2 Med Room Room 7199
1/2" = 1'-0"
East Elevation

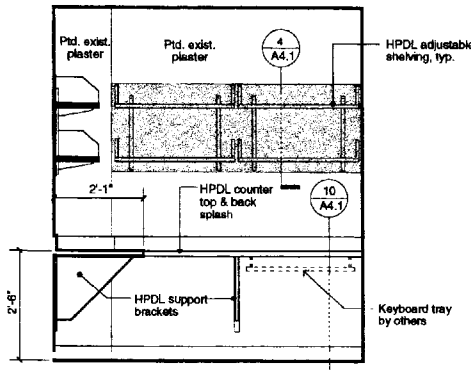


3 Coordinators Room 7160
1/2" = 1'-0"
West Elevation

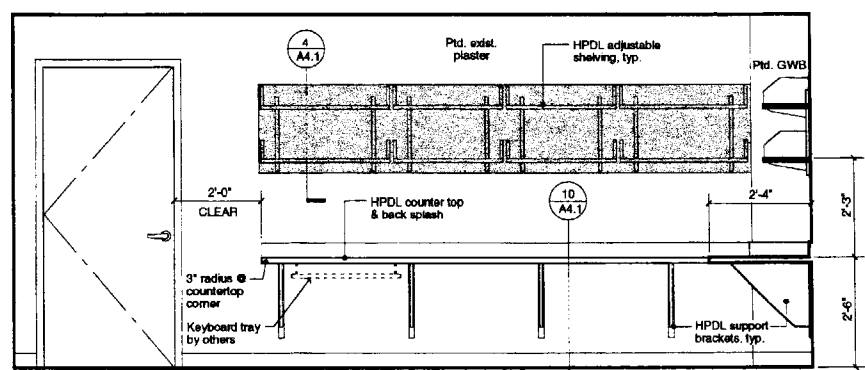


4 Coordinators Room 7160
1/2" = 1'-0"
South Elevation

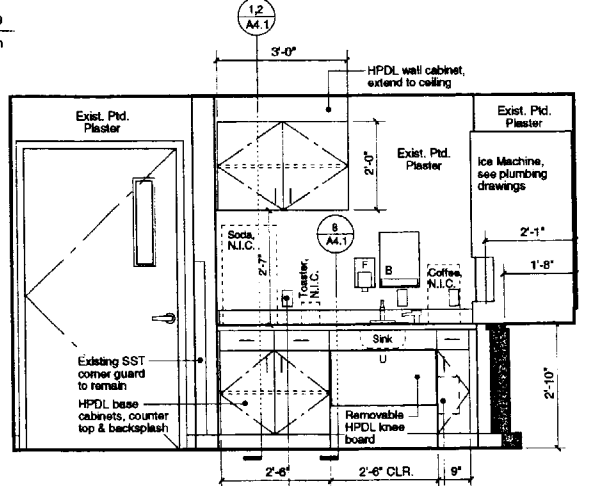


5 Kitchen Room 7116
1/2" = 1'-0"
South Elevation

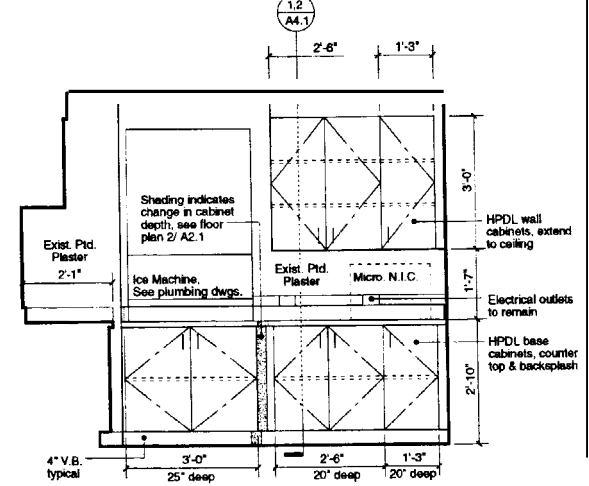


6 Kitchen Room 7116
1/2" = 1'-0"
South Elevation

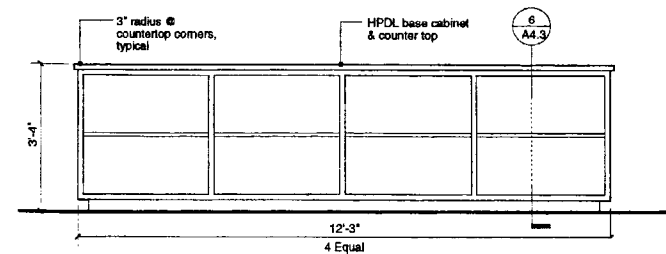


7 Med Island Room 7139
1/2" = 1'-0"
East/ West Elevation




8 Med Island Room 7139
1/2" = 1'-0"
North/ South Elevation

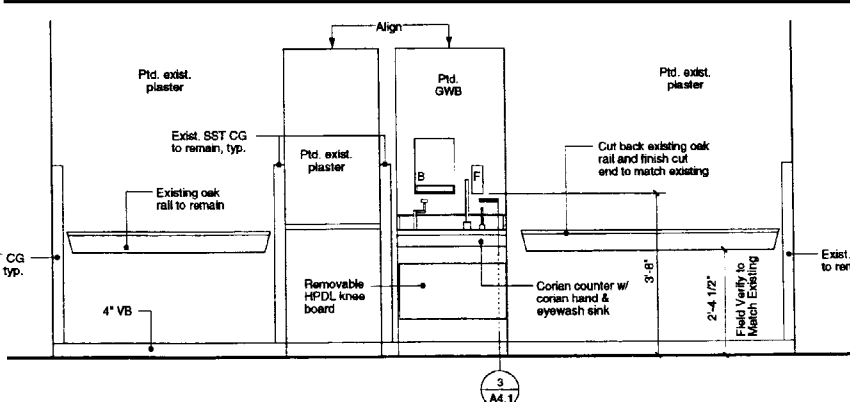


9 Hand/ Eyewash Sink DC-R707
1/2" = 1'-0"
West Elevation

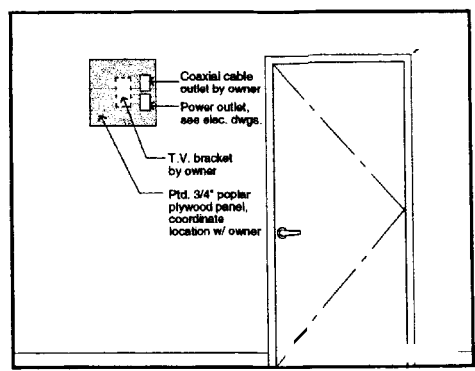

11 Quiet Room
1/2" = 1'-0"

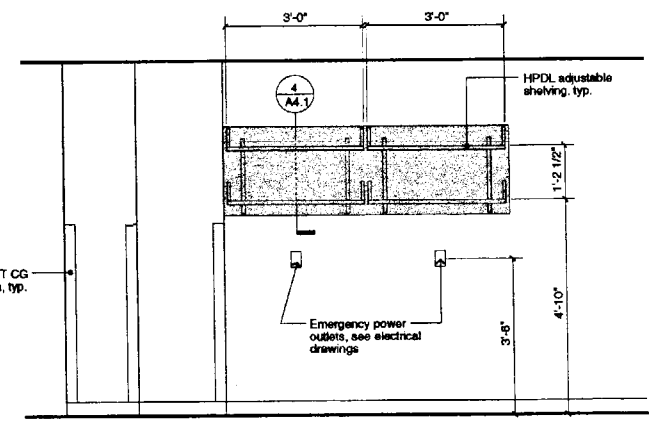

12 Corridor DC-R705
1/2" = 1'-0"
South Elevation

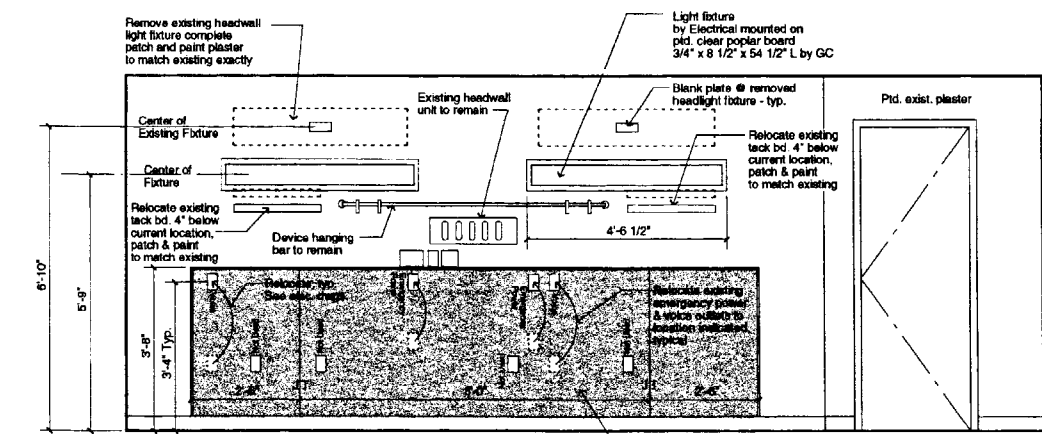

10 Typical Patient Room
1/2" = 1'-0"



Richards Wing
Seventh Floor

Renovations

Maine Medical Center
Portland, Maine 04102

Architect
Winton Scott Architects
Portland, Maine


Mechanical Engineering
Mechanical Systems Engineers
Yamouth, Maine

Electrical Engineering
Bartlett Design
Bath, Maine


Interior Elevations

A 3.1


Scale: 1/2" = 1'-0"
May 28, 2004

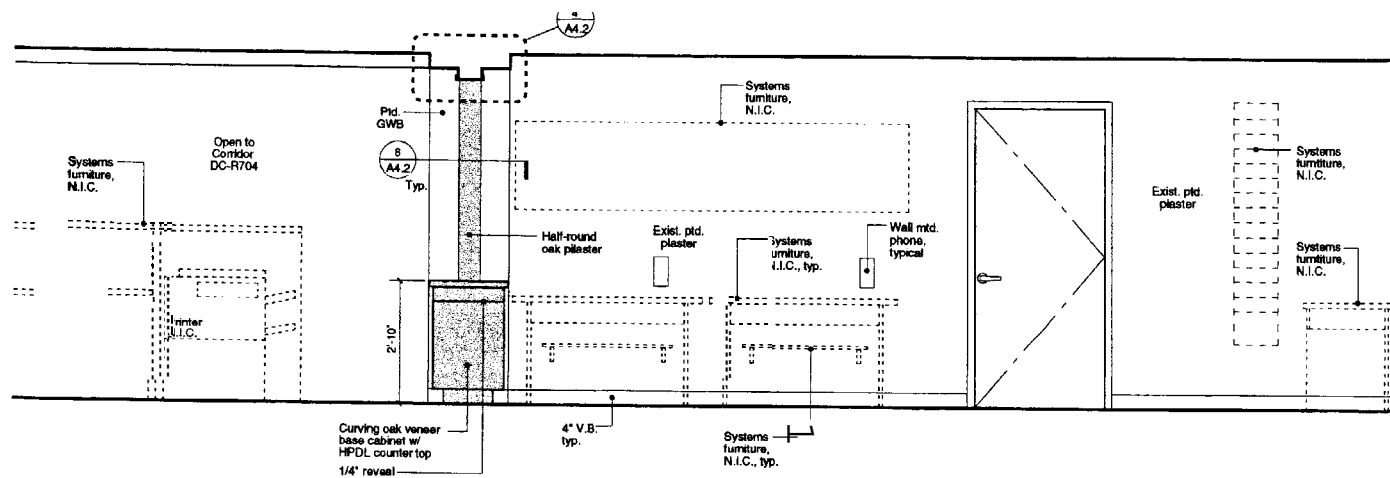


11 Charting Room 7144
1/2" = 1'-0"
North Elevation

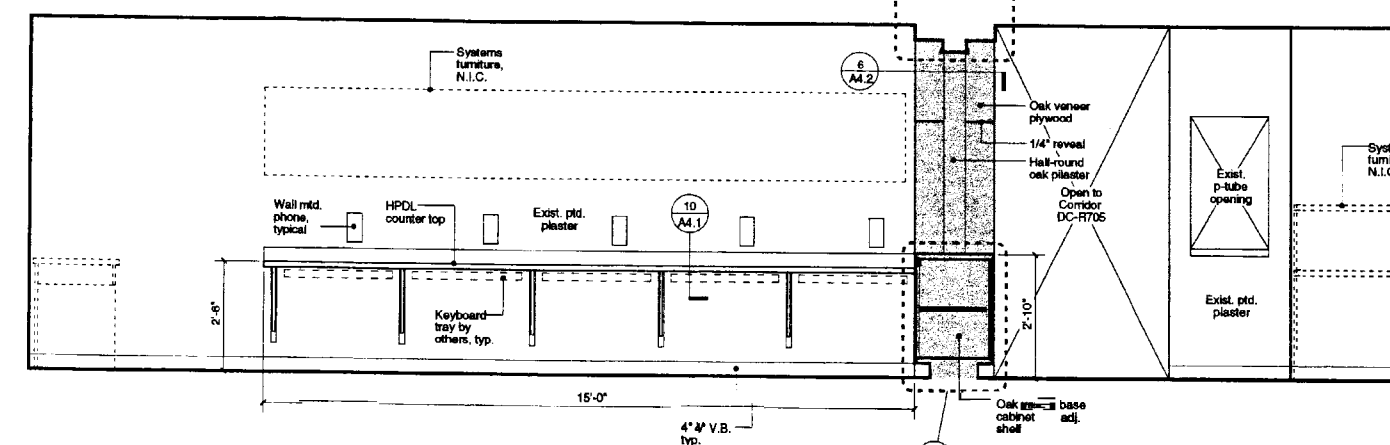


13 Charting Room 7144
1/2" = 1'-0"
South Elevation

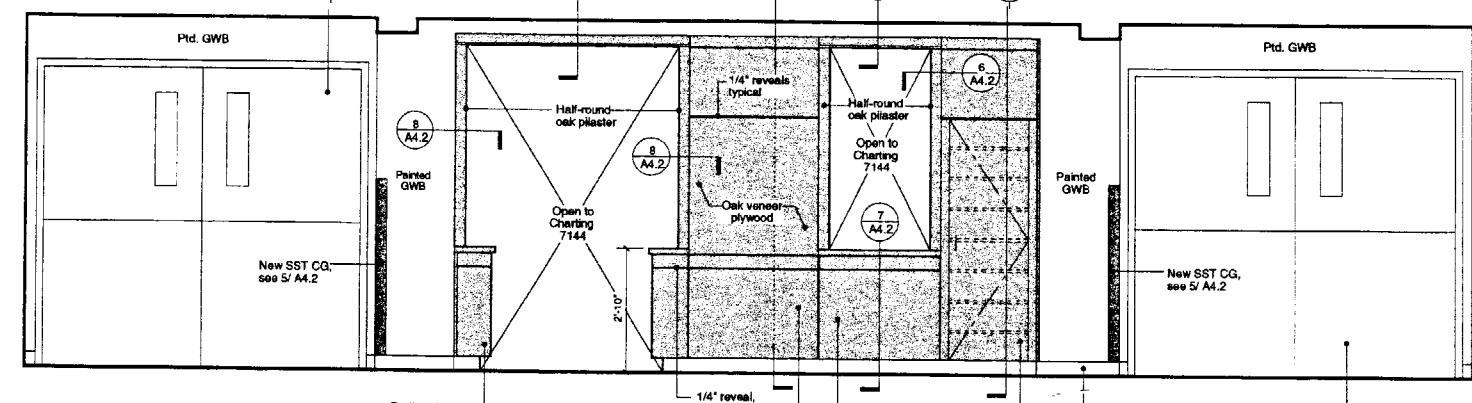


14 Charting Room 7144
1/2" = 1'-0"
East Elevation

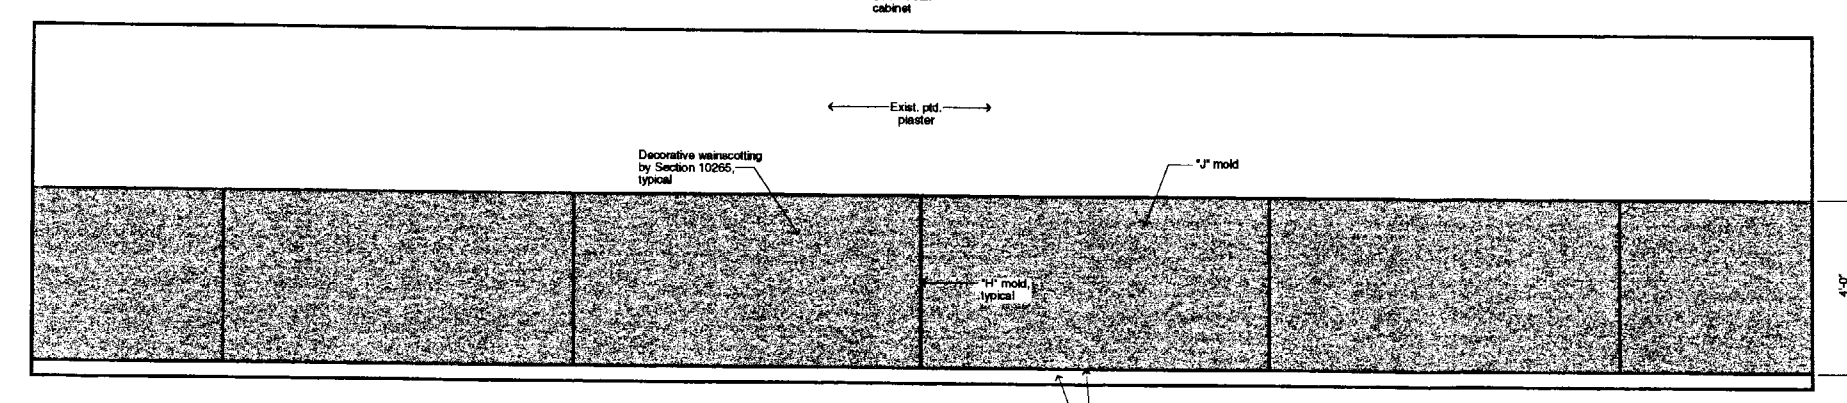


20 Elevator Lobby DC-R710
1/2" = 1'-0"
South Elevation

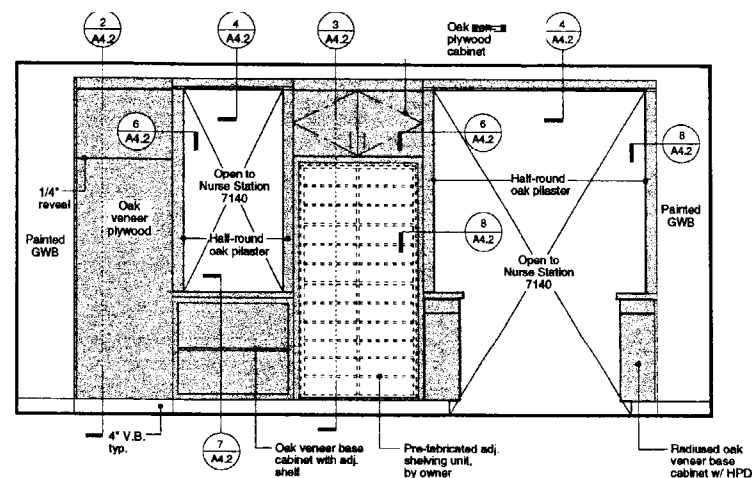


12 Charting Room 7144
1/2" = 1'-0"
West Elevation

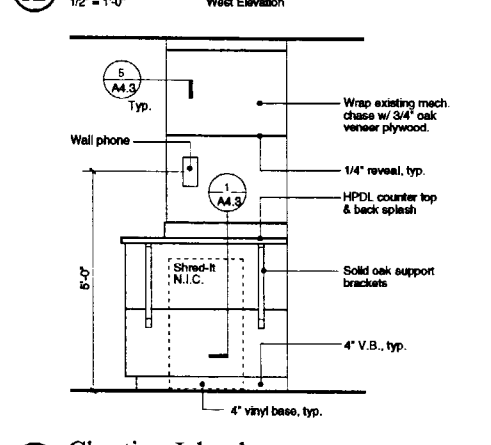


15 Charting Island Room 7144
1/2" = 1'-0"
West Elevation

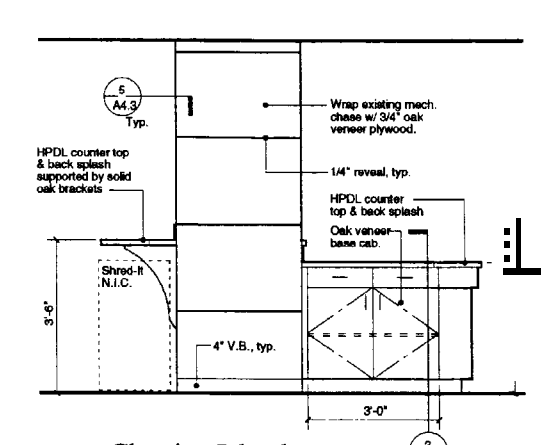


16 Charting Island Room 7144
1/2" = 1'-0"
South Elevation

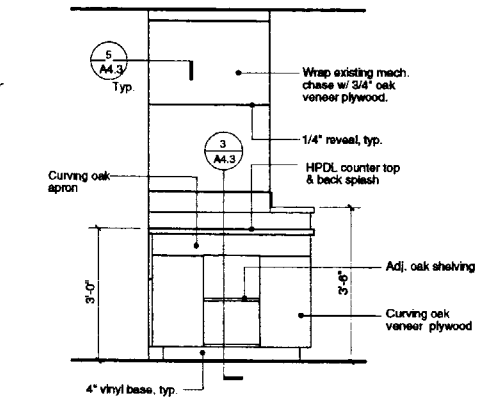

17 Charting Island Room 7144
1/2" = 1'-0"
East Elevation

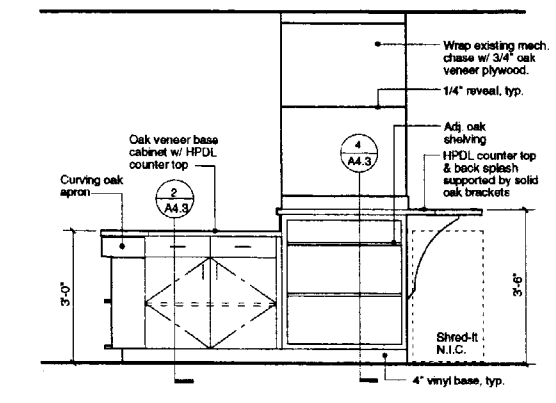

18 Charting Island Room 7144
1/2" = 1'-0"
North Elevation

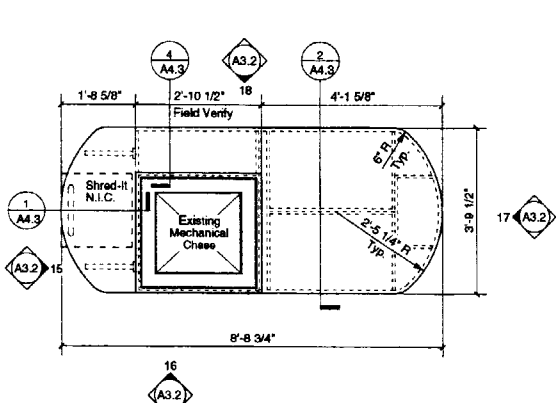


19 Charting Island Room 7144
1/2" = 1'-0"
Plan View

Architect
Winton Scott Architects
Portland, Maine


Mechanical Engineering
Mechanical Systems Engineers
Yarmouth, Maine

Electrical Engineering
Bartlett Design
Bath, Maine


Interior Elevations
A 3.2

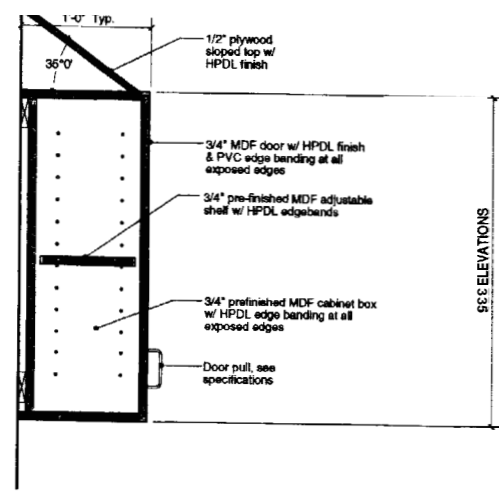


1 Typical Wall Cabinet
1 1/2" = 1'-0"

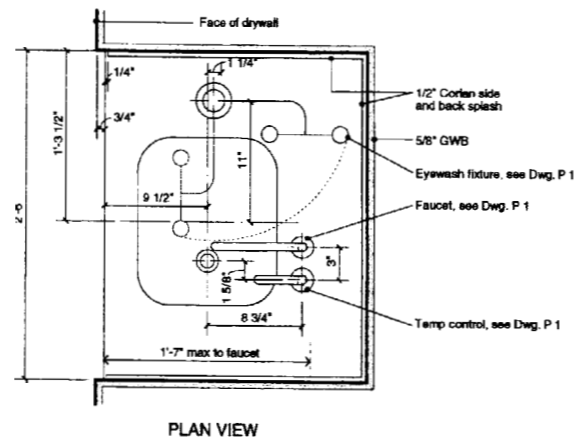


PLAN VIEW

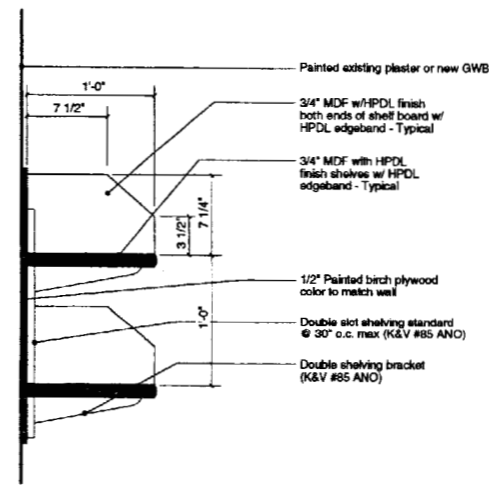


4 Adjustable Wall Shelving
1 1/2" = 1'-0"

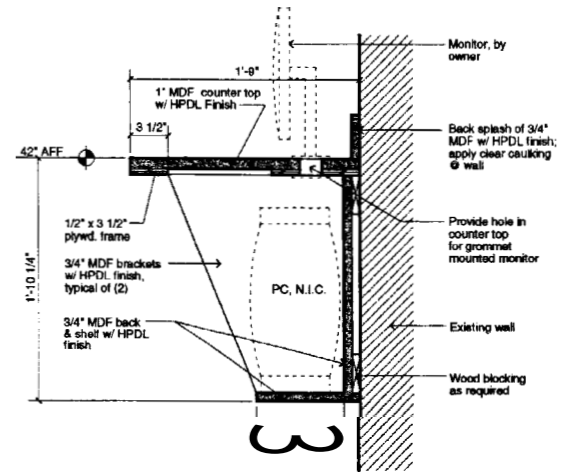


5 Wall Mounted Desk Detail
1 1/2" = 1'-0"

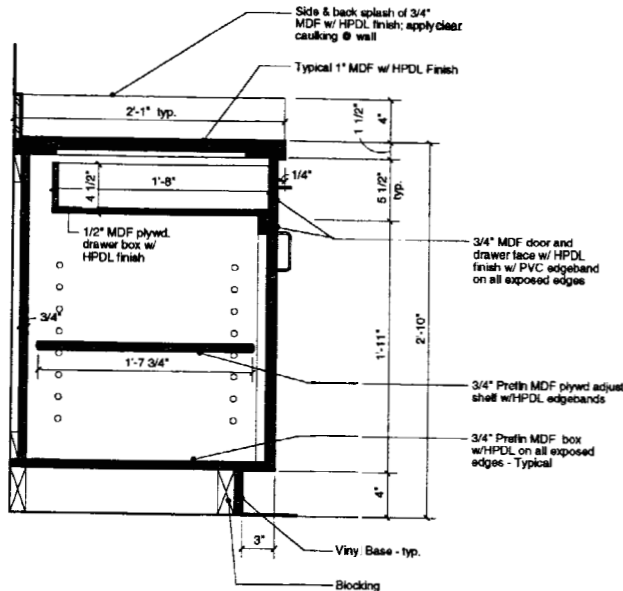


2 Typical Base Cabinet
1 1/2" = 1'-0"

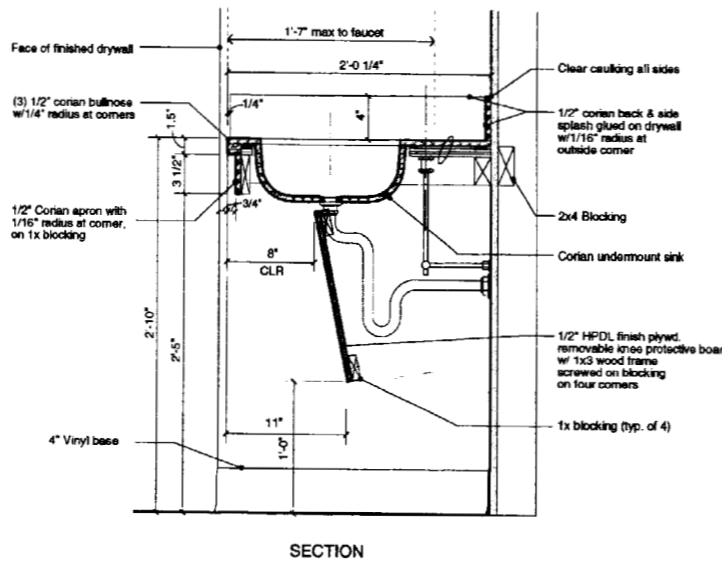


SECTION

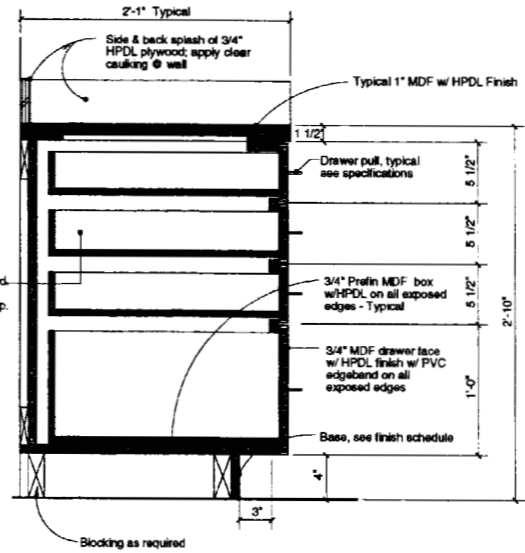


6 Drawer Base Cabinet
1 1/2" = 1'-0"

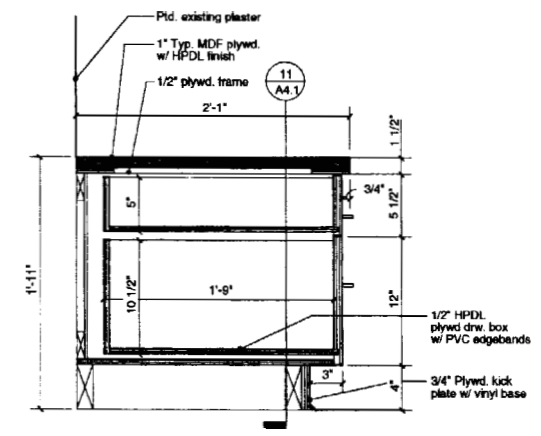


7 Med Room Drawer Base Cabinet
1 1/2" = 1'-0"

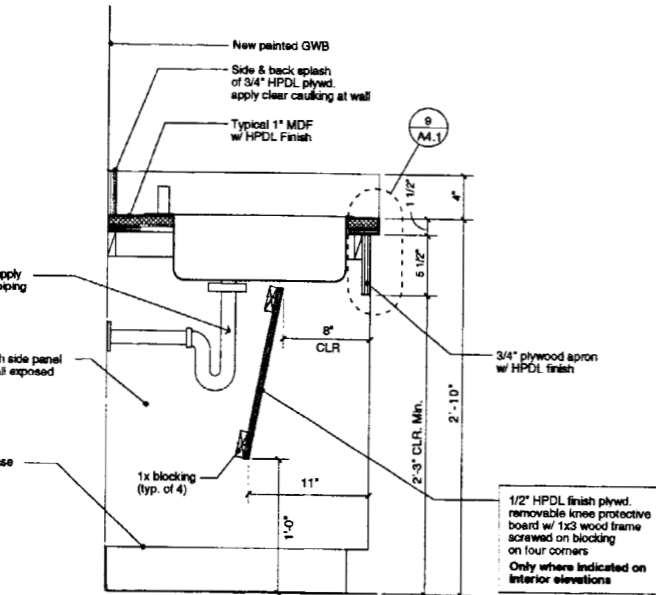

8 Section at Sink
1 1/2" = 1'-0"

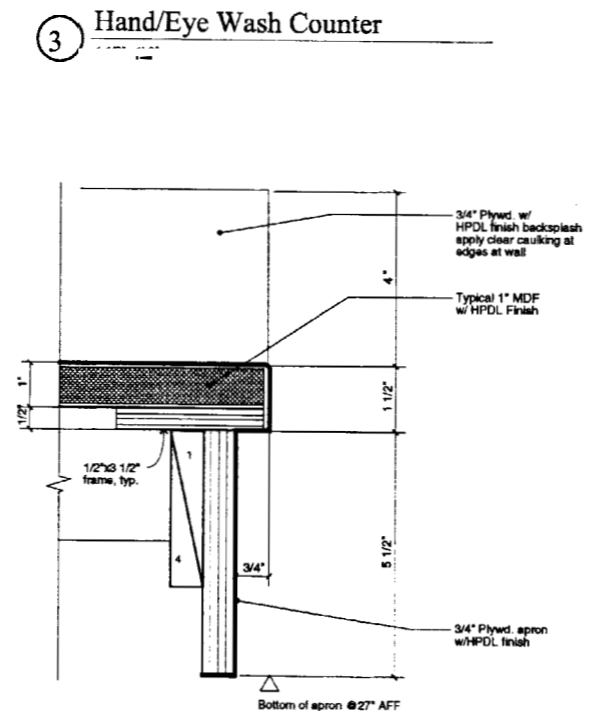

9 Detail @ Counter w/ Knee Space
6" = 1'-0"

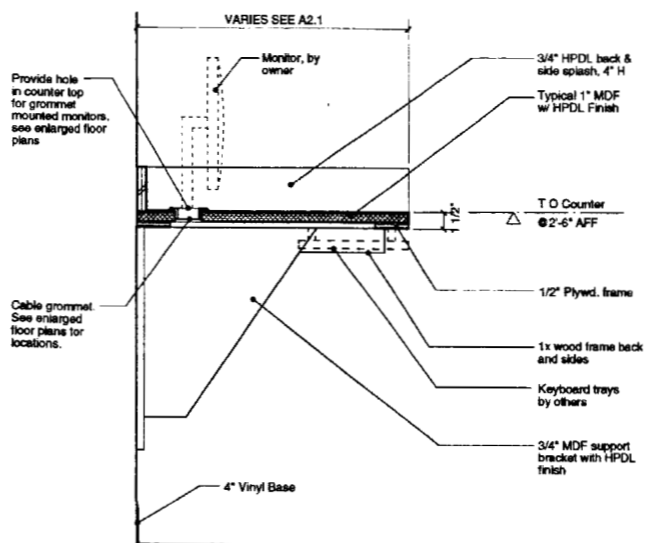

10 Countertop Detail
1 1/2" = 1'-0"



11



Richards Wing
Seventh Floor
Renovations


Maine Medical Center
Portland, Maine 04102

Architect
Winton Scott Architects
Portland, Maine


Mechanical Engineering
Mechanical Systems Engineers
Yarmouth, Maine

Electrical Engineering
Bartlett Design
Bath, Maine


Architectural
Woodwork
A 4.1

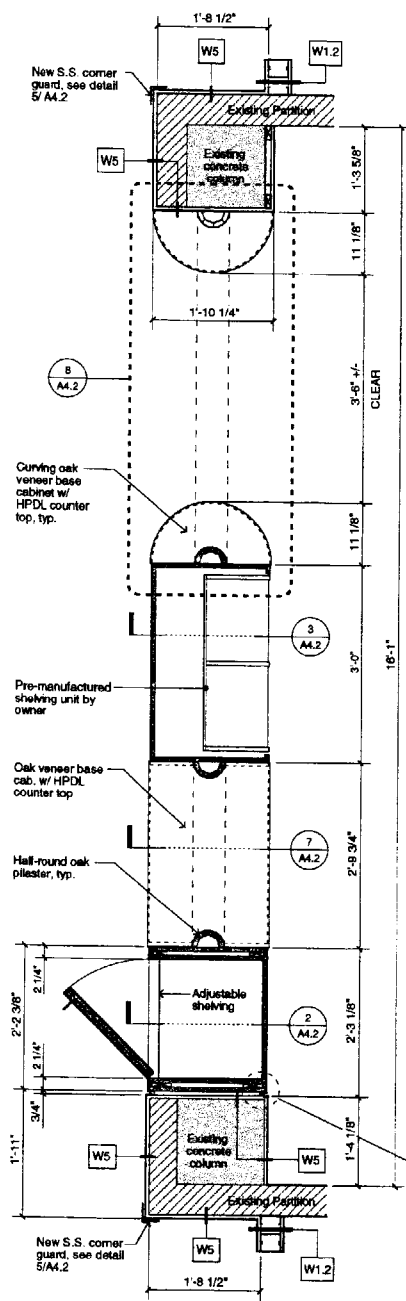


1 Nurse Station Plan Detail
3/4" x 1'-0"

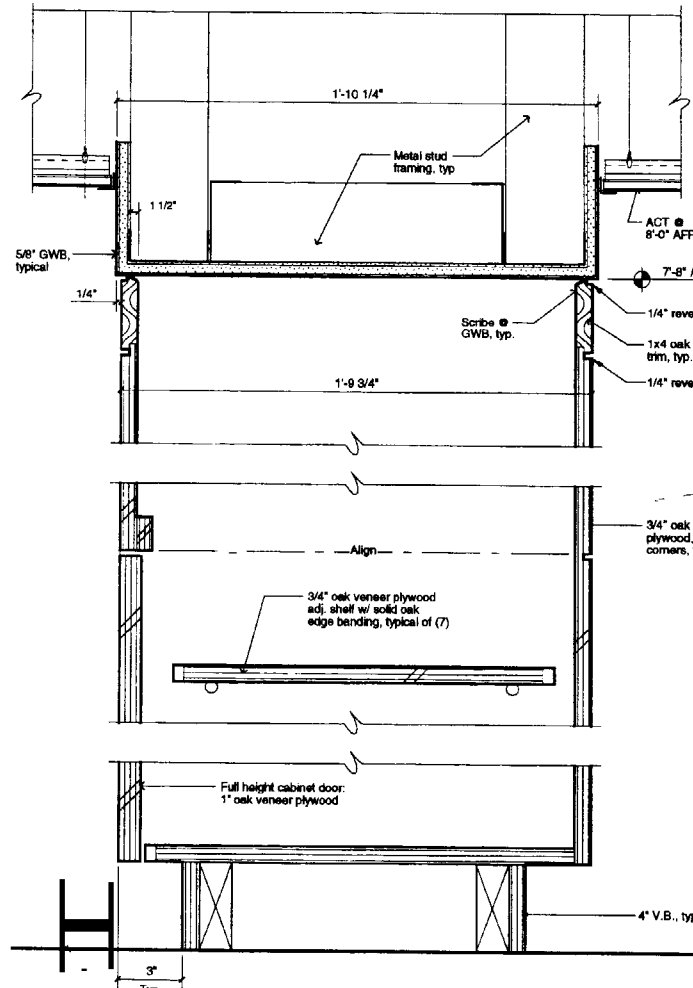



2 Full Height Cabinetry Section
3/4" x 1'-0"

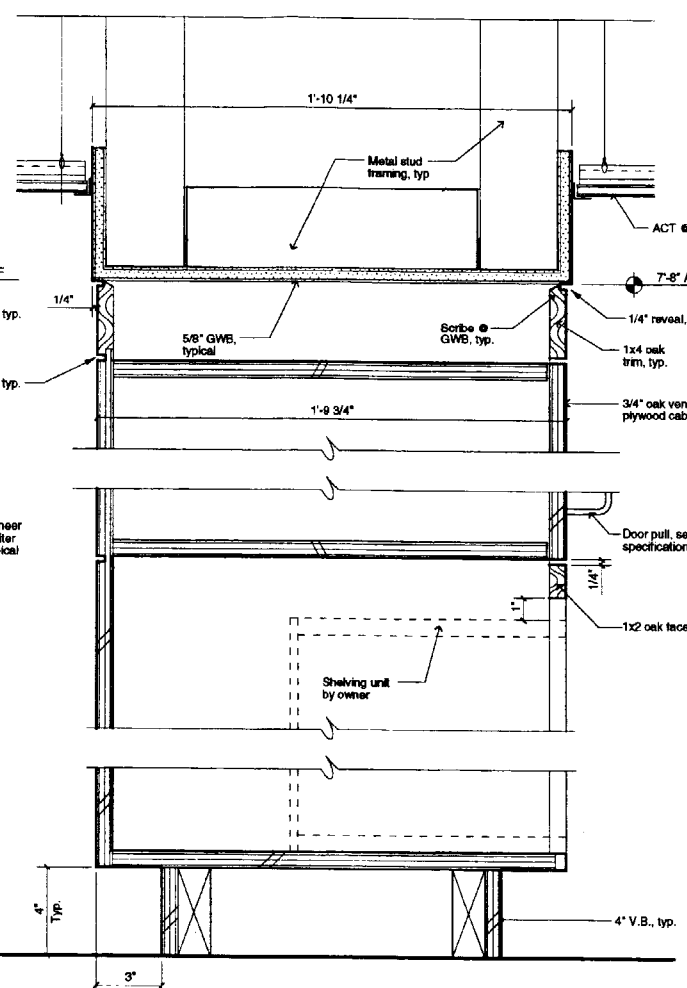


3 Nurse Station Section
3' x 1'-0"

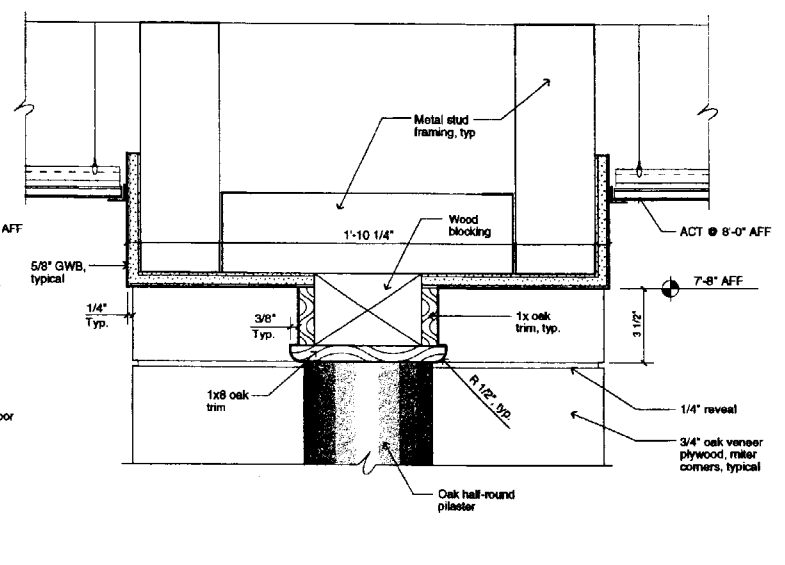


4 Nurse Station Header Detail
3' x 1'-0"

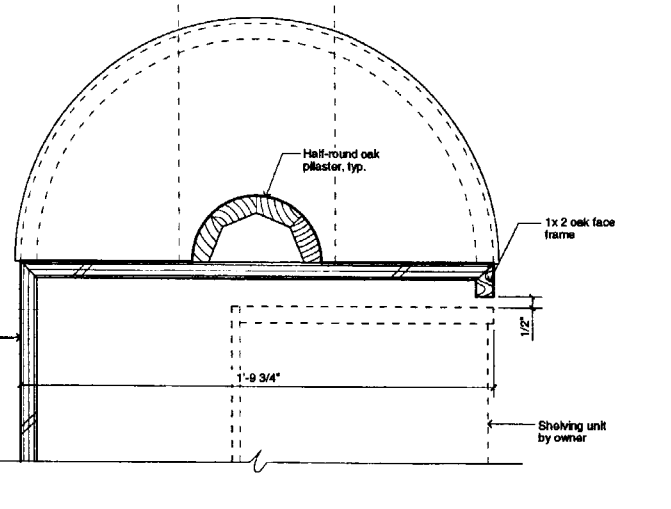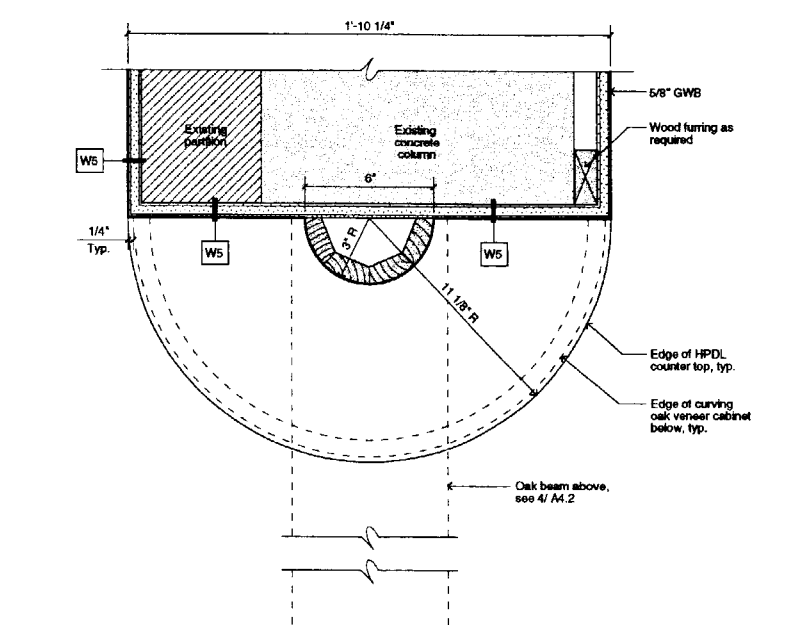


8 Nurse Station Plan Detail
3' x 1'-0"

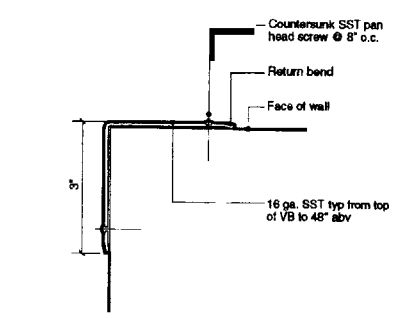

5 Typical CG Detail
6' x 1'-0"

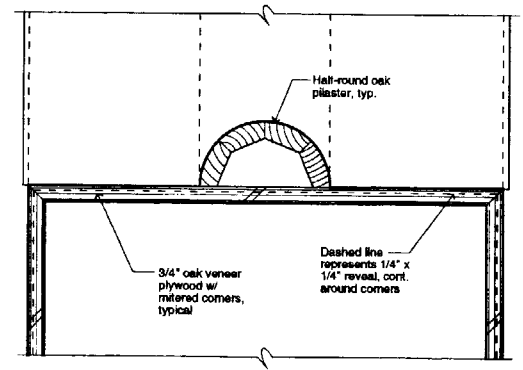

6 Nurse Station Plan Detail
3' x 1'-0"

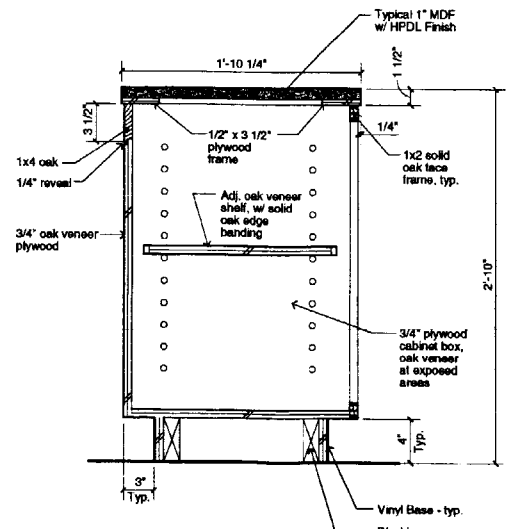

7 Oak Cabinet Detail
1 1/2' x 1'-0"



Richards Wing
Seventh Floor
Renovations

Maine Medical Center
Portland, Maine 04102


Architect
Winton Scott Architects
Portland, Maine

Mechanical Engineering
Mechanical Systems Engineers
Yarmouth, Maine


Electrical Engineering
Bartlett Design
Bath, Maine

Architectural
Woodwork
A4.2


Scale: As Shown
May 28, 2004

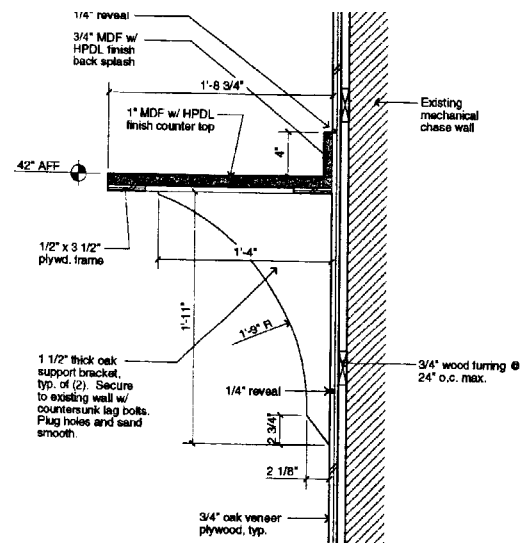


1 Charting Island Bracket Detail
1 1/2" = 1'-0"

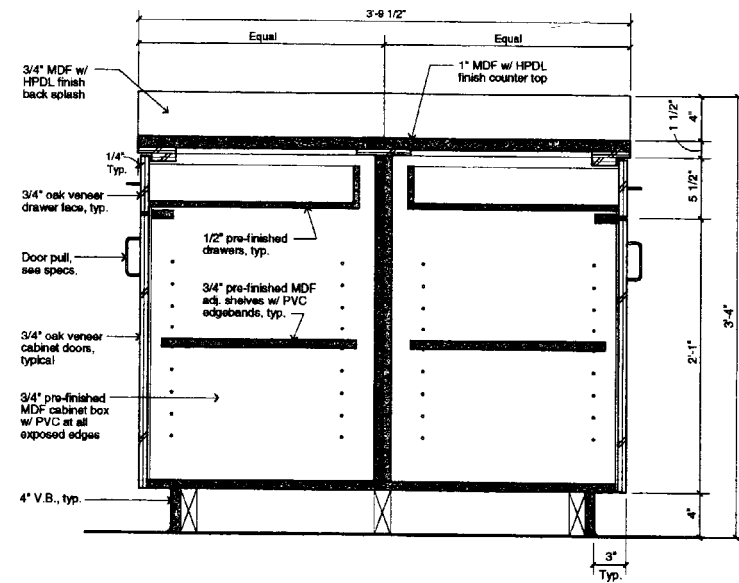


2 Charting Island Section
1 1/2" = 1'-0"

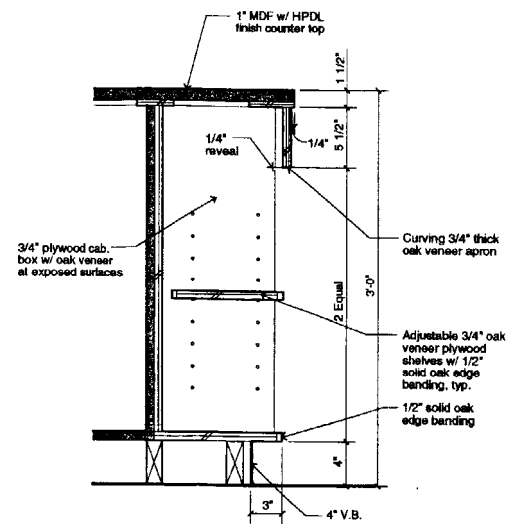


3 Charting Island End Section
1 1/2" = 1'-0"

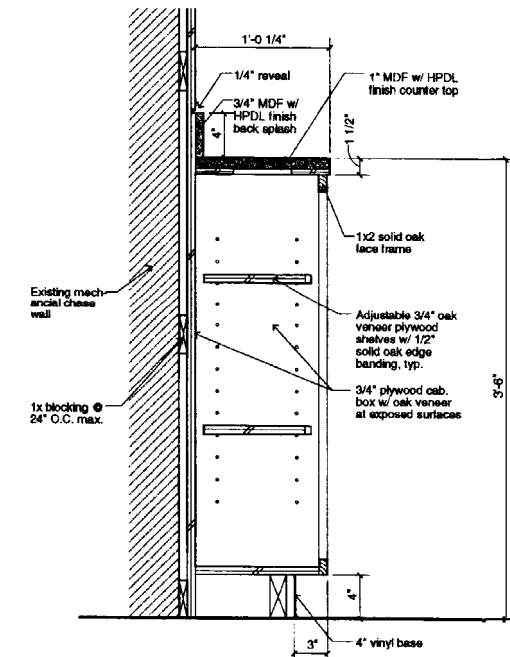

4 Charting Island Section
1 1/2" = 1'-0"

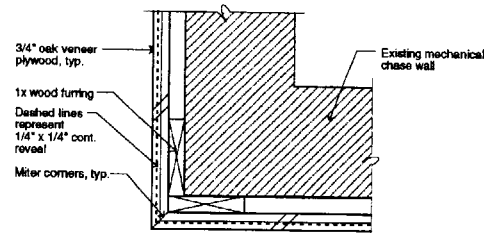

5 Charting Island Detail
3" = 1'-0"

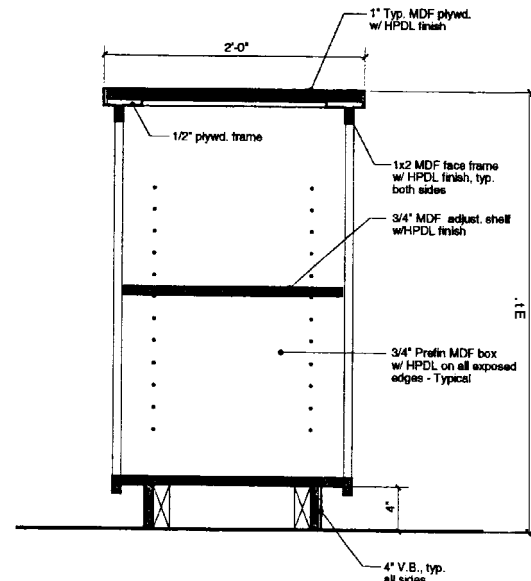

6 Med Room Island Section
1 1/2" = 1'-0"



Richards Wing
Seventh Floor
Renovations

Maine Medical Center
Portland, Maine 04102

Architect
Winton Scott Architects
Portland, Maine

Mechanical Engineering
Mechanical Systems Engineers
Yarmouth, Maine



Electrical Engineering
Bartlett Design
Bath, Maine

Architectural
Woodwork

A 4.3

Scale: As Shown

May 26, 2004

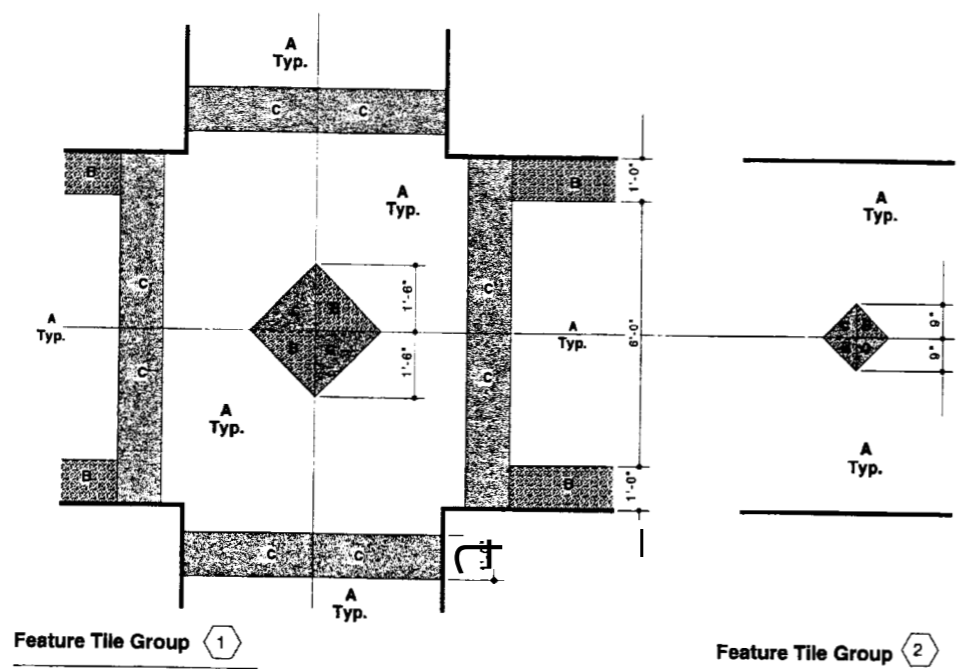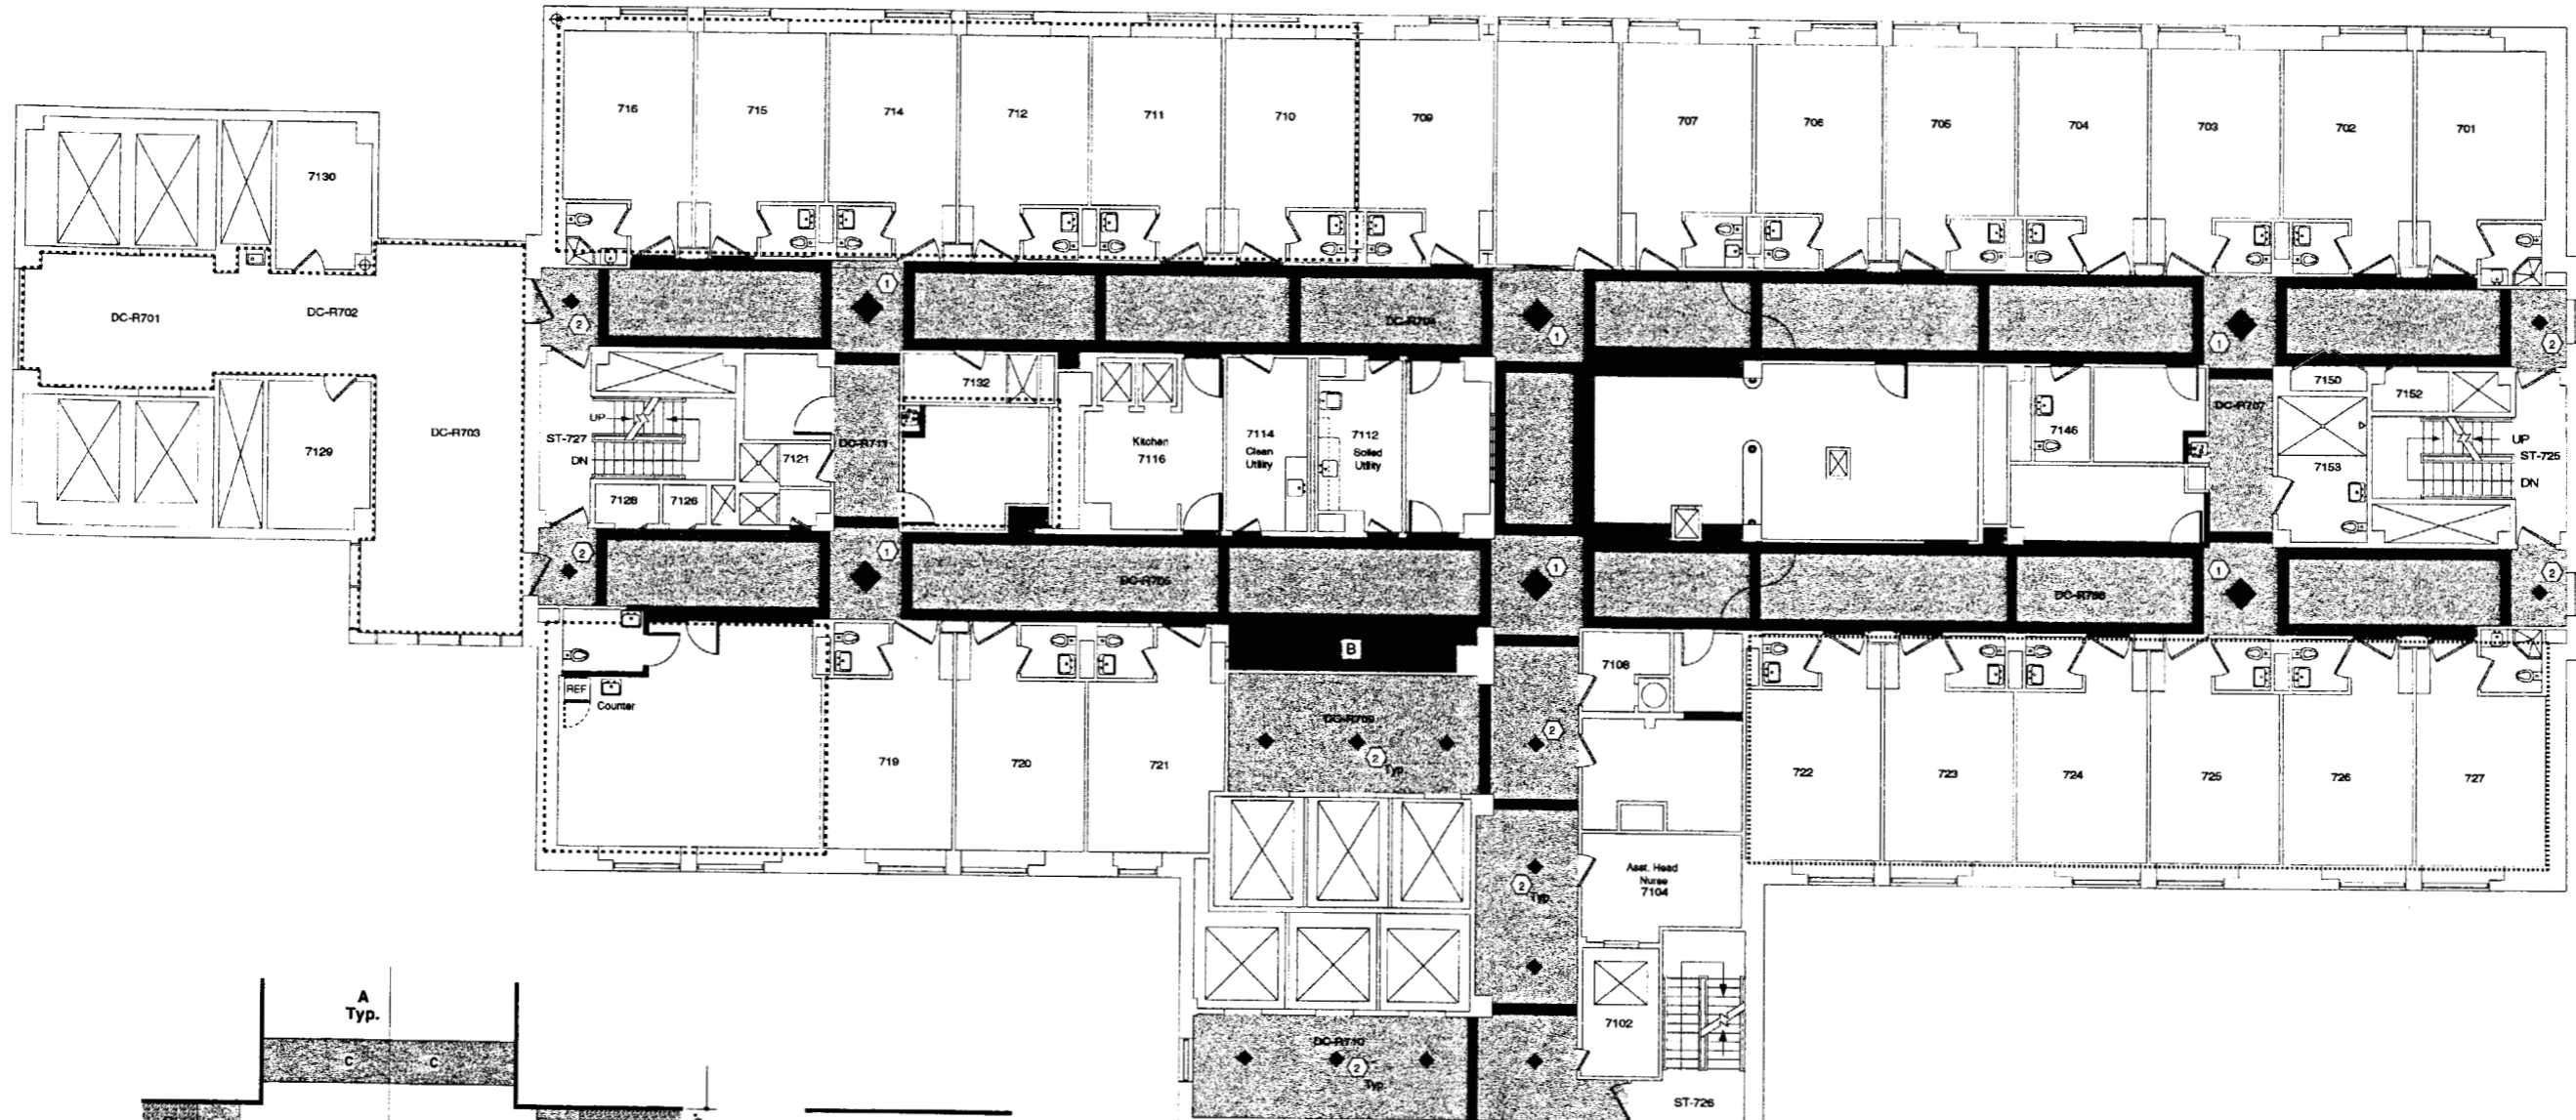




Feature Tile Group 1
1 Partial Flooring Plan

Feature Tile Group 2

Note: Provide 1/8" thick latex modified portland cement underlayment at all areas to receive new flooring. Feather to 0" thickness as required for transitions.

Existing VAT and carpet will be removed under separate contract before start of construction. Grind floor as required to remove any remaining debris and wet vac clean before installing underlayment.

Flooring Key

-  Proposed Field Color
Mondo Harmoni "Sand" R-45
-  Proposed Accent Color
Mondo Harmoni "Taupe" R-34
-  Proposed Accent Color
Mondo Harmoni "Berry" R-55

Flooring Notes

1. All Vinyl Base: 4" H
2. All Vinyl Transition Strips: Color to be determined.

VCT And CT Restorations To Be Done By Alternates 2, 3, & 4. See Section 01230

Richards Wing
 Seventh Floor
 Renovations


Maine Medical Center
 Portland, Maine 04102

Architect
Winton Scott Architects
 Portland, Maine


Mechanical Engineering
Mechanical Systems Engineers
 Yarmouth, Maine

Electrical Engineering
Bartlett Design
 Bath, Maine


Flooring Plan
A 5

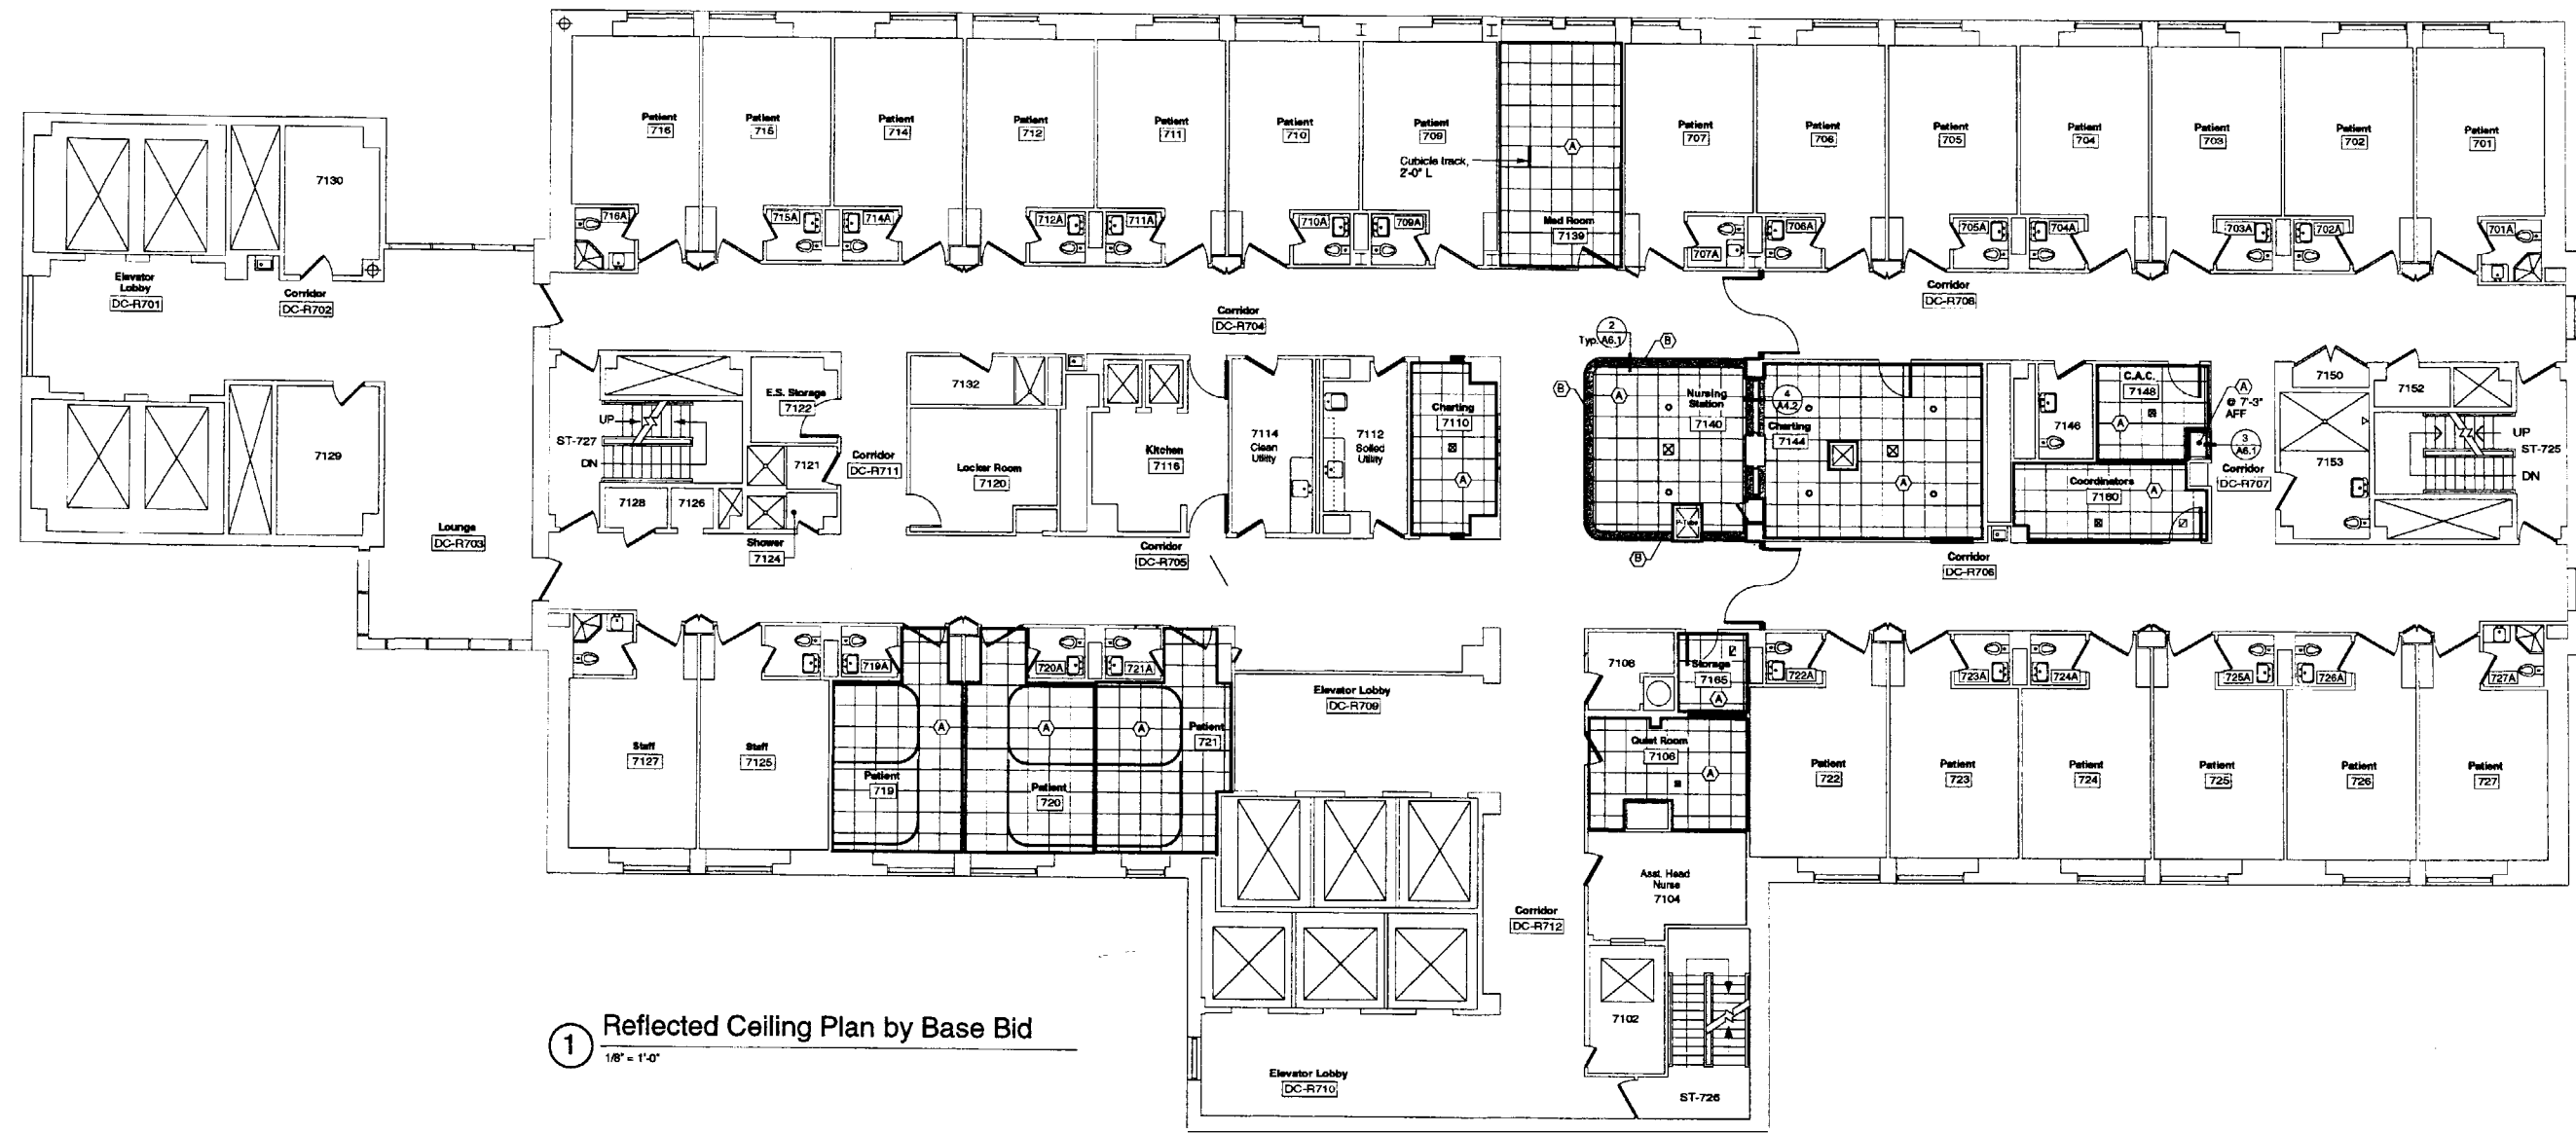

1 Reflected Ceiling Plan by Base Bid
1/8" = 1'-0"

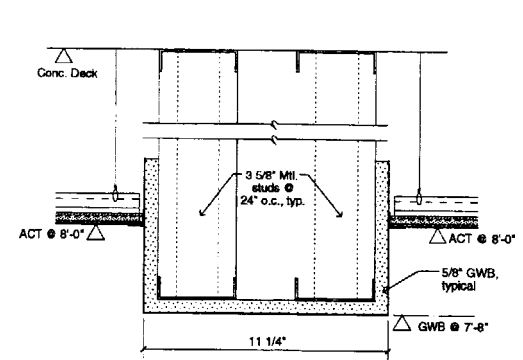

2 Soffit Detail
3\"/>

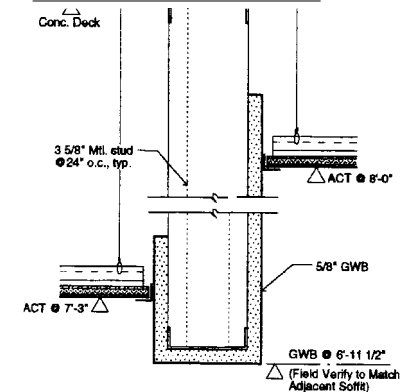

3 Detail
3\"/>

CEILING TYPES KEY	
(A)	Proposed 2x2 ACT at 8'-0\"/>
(B)	Proposed GWB soffit

GENERAL NOTE

1. Sprinkler heads shown shall be provided under separate contract to the Owner. Coordinate work with this contractor.

LEGEND	
	Critical layout point. Center tile on corridors in 2 directions.
	Sprinkler Head (By Separate Contract)
	Supply Air Grille
	Return Air Grille
	Recessed Fluorescent Light Fixture
	Cubicle track, see specifications section 10190

Richards Wing
Seventh Floor
Renovations

Maine Medical Center
Portland, Maine 04102

Architect
Scott Arc hets
Portland, Maine


Mechanical
Mechanical Systems Engineers
Yarmouth, Maine

Electrical Engineering
Bartlett Design
Bath, Maine

Reflected Ceiling
Plan: Base Bid
A 6.1



10
8
4
0

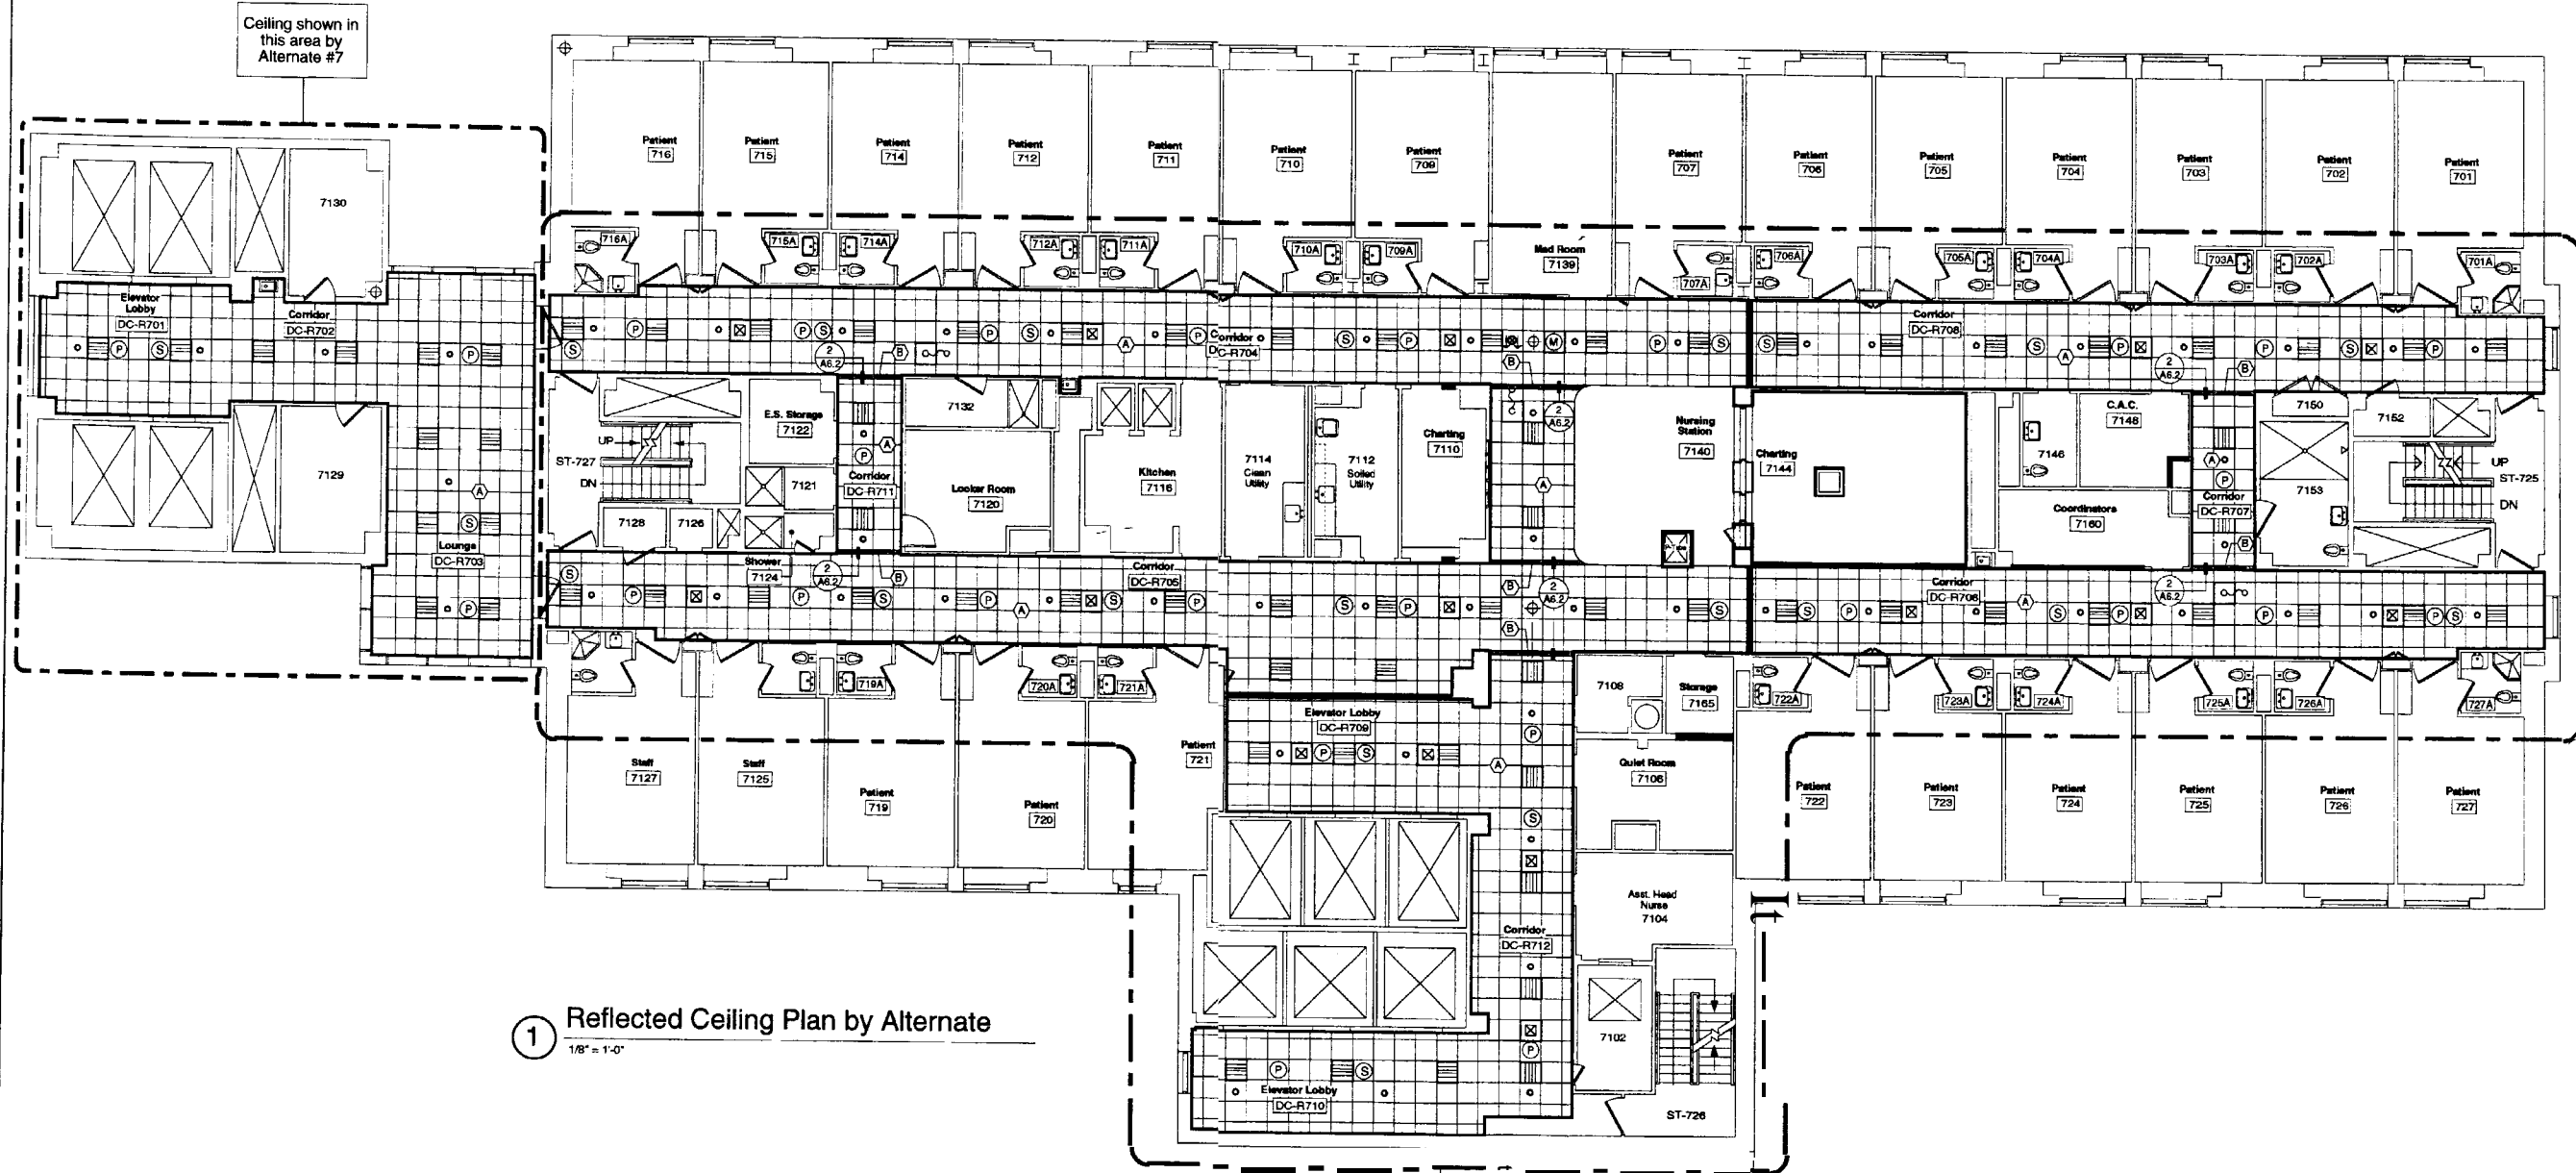

Ceiling shown in this area by Alternate #7

Ceiling shown in this area by alternate #1

1 Reflected Ceiling Plan by Alternate
1/8" = 1'-0"

2 Soffit Detail
3" = 1'-0"

CEILING TYPES KEY	
(A)	Proposed 2x2 ACT at 8'-0" AFF. U.N.O.
(B)	Proposed GWB soffit.

GENERAL NOTE

1. Sprinkler heads shown shall be provided under separate contract to the Owner. Coordinate work with this contractor.

LEGEND	
⊕	Critical layout point. Center tile on corridors in 2 directions.
(M)	Ceiling Mirror - Remove and Reuse Existing
○	Sprinkler Head (By Separate Contract)
⊠	Supply Air Grille
⊙	Smoke Detector - Remove and reinstall existing unit
⊕	Paging System Speaker
⊠	Recessed Fluorescent Light Fixture
⊕	Wireless Network Access Device (Removal and Replacement by Owner)
⊕	Exit Sign - Remove and reinstall existing unit

Richards Wing
Seventh Floor
Renovations

Maine Medical Center
Portland, Maine 04102

Architect
Winton Scott Architects
Portland, Maine

Mechanical Engineering
Mechanical Systems Engineers
Yarmouth, Maine

Electrical Engineering
Bartlett Design
Bath, Maine

Reflected Ceiling
Plan by Alternate
A 6.2

FINISH SCHEDULE BY BASE BID

Room No.	Room Name	Floor Demo	Floor	Base	Walls	Ceiling	Cig. Ht.	Remarks
7106	Quiet Room	D1	Carpet	Vinyl	Ptd. Ex Plast/ Ptd GWB	ACT	8'-0"	
7119	Office	D1	VCT	Vinyl	Paint Existing Plaster	Exist. ACT to remain	8'-0"	
7116	Kitchen	D1	VCT	Vinyl	Paint Existing Plaster	Exist. ACT to remain	8'-0"	
7124	Shower	See Note #2	See Note #2	--	--	--	--	
7140	Nursing Station	D2	VCT	Vinyl	Ptd. Ex Plast/ Ptd GWB	ACT/ Ptd. GWB	8'-0"	
7148	C.A.C.	D2	VCT	Vinyl	Ptd. Ex Plast/ Ptd GWB	ACT	8'-0"	
7158	Corridor	D1	VCT	Vinyl	Ptd. Ex Plast/ Ptd GWB	ACT	8'-0"	
7165	Storage	D1	VCT	Vinyl	Ptd. Ex Plast/ Ptd GWB	ACT	8'-0"	
DC-R704	Corridor	D1	Sheet Rubber	Vinyl	Ptd. Ex Plast/ Ptd GWB	ACT *	8'-0"	* BY ALTERNATE #1
DC-R705	Corridor	D1	Sheet Rubber	Vinyl	Ptd. Ex Plast/ Ptd GWB	ACT *	8'-0"	* BY ALTERNATE #1
DC-R706	Corridor	D1	Sheet Rubber	Vinyl	Ptd. Ex Plast/ Ptd GWB	ACT *	8'-0"	* BY ALTERNATE #1
DC-R707	Corridor	D1	Sheet Rubber	Vinyl	Ptd. Ex Plast/ Ptd GWB	ACT *	8'-0"	* BY ALTERNATE #1
DC-R710	Elevator Lobby	D1	Sheet Rubber	Vinyl	Paint Existing Plaster	ACT *	8'-0"	* BY ALTERNATE #1
DC-R712	Corridor	D1	Sheet Rubber	Vinyl	Paint Existing Plaster	ACT *	8'-0"	* BY ALTERNATE #1

Room No.	Room Name	Floor Demo	Floor	Base	Walls	Ceiling	Cig. Ht.	Remarks
702	Patient Room	D1	VCT	Vinyl	Paint Existing Plaster	Exist. ACT	8'-0"	
704	Patient Room	D1	VCT	Vinyl	Paint Existing Plaster	Exist. ACT	8'-0"	
706	Patient Room	D1	VCT	Vinyl	Paint Existing Plaster	Exist. ACT	8'-0"	
708	Patient Room	D1	VCT	Vinyl	Paint Existing Plaster	Exist. ACT	8'-0"	
711	Patient Room	D1 *	VCT *	Vinyl *	Paint Existing Plaster	Exist. ACT	8'-0"	* BY ALTERNATE #4
713	Patient Room	D1 *	VCT *	Vinyl *	Paint Existing Plaster	Exist. ACT	8'-0"	* BY ALTERNATE #4
714	Patient Room	D1 *	VCT *	Vinyl *	Paint Existing Plaster	Exist. ACT	8'-0"	* BY ALTERNATE #4
716	Patient Room	D1 *	VCT *	Vinyl *	Paint Existing Plaster	Exist. ACT	8'-0"	* BY ALTERNATE #4
720	Patient Room	D1	VCT	Vinyl	Paint Existing Plaster	ACT	8'-0"	
722	Patient Room	D1 *	VCT *	Vinyl *	Paint Existing Plaster	Exist. ACT	8'-0"	* BY ALTERNATE #3
724	Patient Room	D1 *	VCT *	Vinyl *	Paint Existing Plaster	Exist. ACT	8'-0"	* BY ALTERNATE #3
726	Patient Room	D1 *	VCT *	Vinyl *	Paint Existing Plaster	Exist. ACT	8'-0"	* BY ALTERNATE #3
727	Patient Room	D1 *	VCT *	Vinyl *	Paint Existing Plaster	Exist. ACT	8'-0"	* BY ALTERNATE #3

Room No.	Room Name	Floor Demo	Floor	Base	Walls	Ceiling	Cig. Ht.	Remarks
701A	Patient Bathroom	--	Exist. CT/ AWSG	Exist. CT	See Note #1	Paint Exist. Plaster	8'-0"	
702A	Patient Bathroom	--	Exist. CT/ AWSG	Exist. CT	See Note #1	Paint Exist. Plaster	8'-0"	
704A	Patient Bathroom	--	Exist. CT/ AWSG	Exist. CT	See Note #1	Paint Exist. Plaster	8'-0"	
706A	Patient Bathroom	--	Exist. CT/ AWSG	Exist. CT	See Note #1	Paint Exist. Plaster	8'-0"	
708A	Patient Bathroom	--	Exist. CT/ AWSG	Exist. CT	See Note #1	Paint Exist. Plaster	8'-0"	
711A	Patient Bathroom	--	Exist. CT/ AWSG *	Exist. CT	See Note #1	Paint Exist. Plaster	8'-0"	* BY ALTERNATE #4
713A	Patient Bathroom	--	Exist. CT/ AWSG *	Exist. CT	See Note #1	Paint Exist. Plaster	8'-0"	* BY ALTERNATE #4
714A	Patient Bathroom	--	Exist. CT/ AWSG *	Exist. CT	See Note #1	Paint Exist. Plaster	8'-0"	* BY ALTERNATE #4
716A	Patient Bathroom	--	Exist. CT/ AWSG *	Exist. CT	See Note #1	Paint Exist. Plaster	8'-0"	* BY ALTERNATE #4
718A	Patient Bathroom	--	Exist. CT/ AWSG	Exist. CT	See Note #1	Paint Exist. Plaster	8'-0"	
721A	Patient Bathroom	--	Exist. CT/ AWSG	Exist. CT	See Note #1	Paint Exist. Plaster	8'-0"	
723A	Patient Bathroom	--	Exist. CT/ AWSG *	Exist. CT	See Note #1	Paint Exist. Plaster	8'-0"	* BY ALTERNATE #3
725A	Patient Bathroom	--	Exist. CT/ AWSG *	Exist. CT	See Note #1	Paint Exist. Plaster	8'-0"	* BY ALTERNATE #3
727A	Patient Bathroom	--	Exist. CT/ AWSG *	Exist. CT	See Note #1	Paint Exist. Plaster	8'-0"	* BY ALTERNATE #3

FINISH SCHEDULE BY ALTERNATE #7

Room No.	Room Name	Floor Demo	Floor	Base	Walls	Ceiling	Cig. Ht.	Remarks
DC-R702	Corridor	D2	Sheet Rubber	Vinyl	Paint Existing Plaster	ACT	8'-0"	
DC-R708	Corridor	D2	Sheet Rubber	Vinyl	Paint Existing Plaster	ACT	8'-0"	

Legend

- ACT Acoustic Tile and Grid by Base Bid
- CT Ceramic Tile
- AWSG Acid wash existing tile, repair deteriorated grout & seal grout.
- D1 Existing VAT removed by ACM Contractor by separate contract / Remove vinyl base and patch wall smooth.
- D2 Remove existing VCT / Remove vinyl base and patch wall smooth.
- D3 Remove existing carpet / Remove vinyl base or wood base and patch wall smooth.



Notes

1. Paint exist plaster from top of CT @ 4'-0" AFF to ceiling.
2. Remove ceramic tile as required for proposed marble threshold, see T3/A8.

PARTITION TYPES Scale: 1/4" = 1'-0"

Note:


Extend all drywall partitions to underside of existing concrete structure above at 10'-0" AFF, typical




W-1 As Shown

W-1.1 1-Hr Fire Rated


W-1.2 1-Hr Fire Rated w/o acoustic insulation

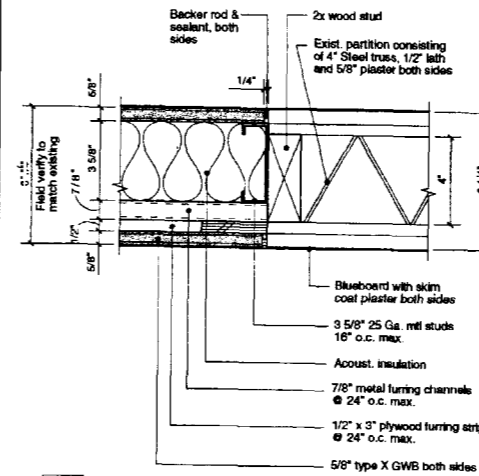


W-2

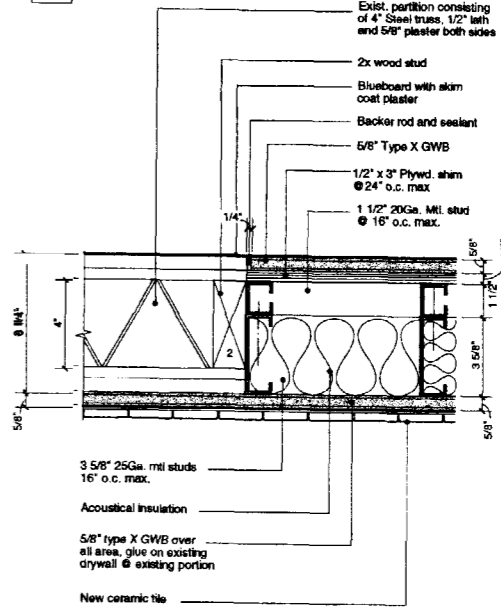

W-3



W-4

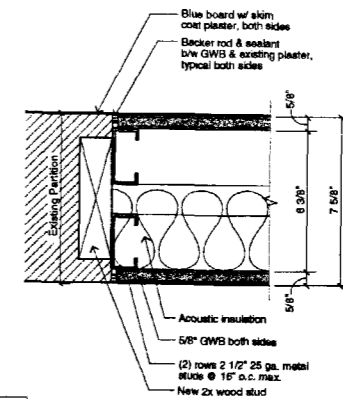

W-5

W-6



Richards Wing
Seventh Floor
Renovations

Portland, Maine 04102
Maine Medical Center

Architect
Winton Scott Architects
Portland, Maine

Mechanical Engineering
Mechanical Systems Engineers
Yarmouth, Maine


Electrical Engineering
Bartlett Design
Bath, Maine

Finish Schedules
&
Partition Types





A 7

Scale: As Shown
May 28, 2004

DOOR TYPES
Scale: 1/4" = 1'-0"

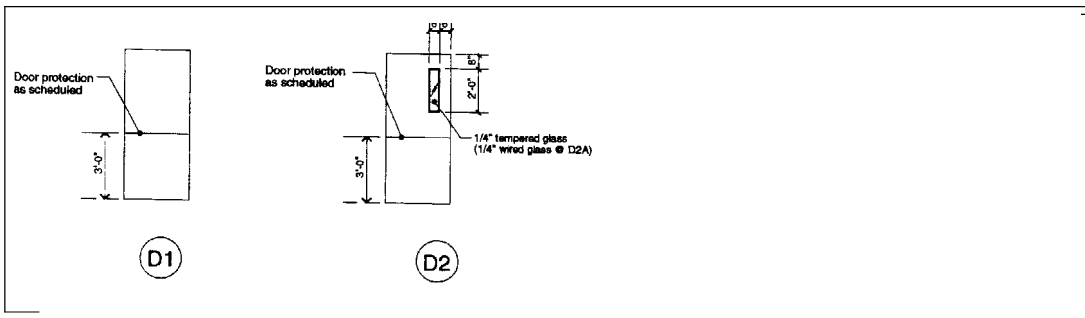

DOOR DETAILS

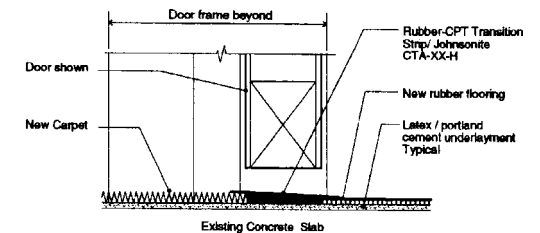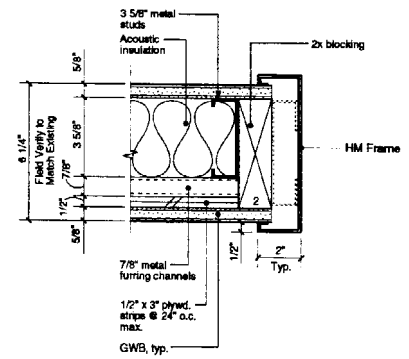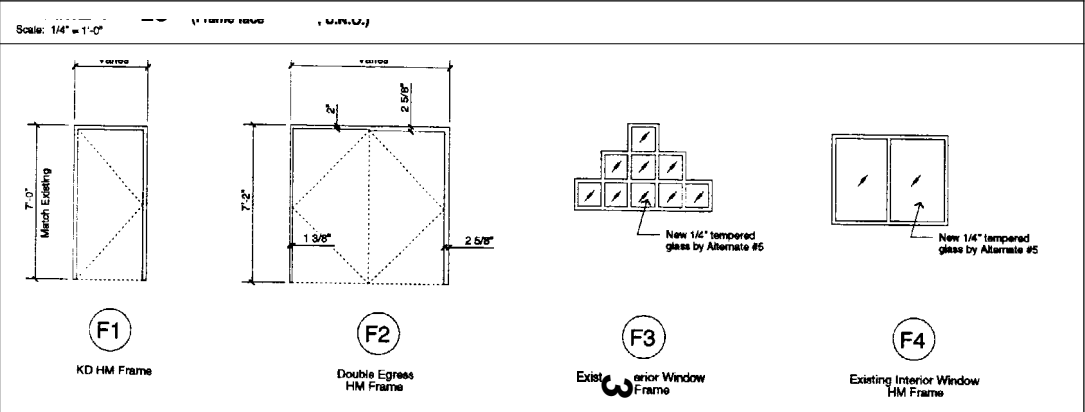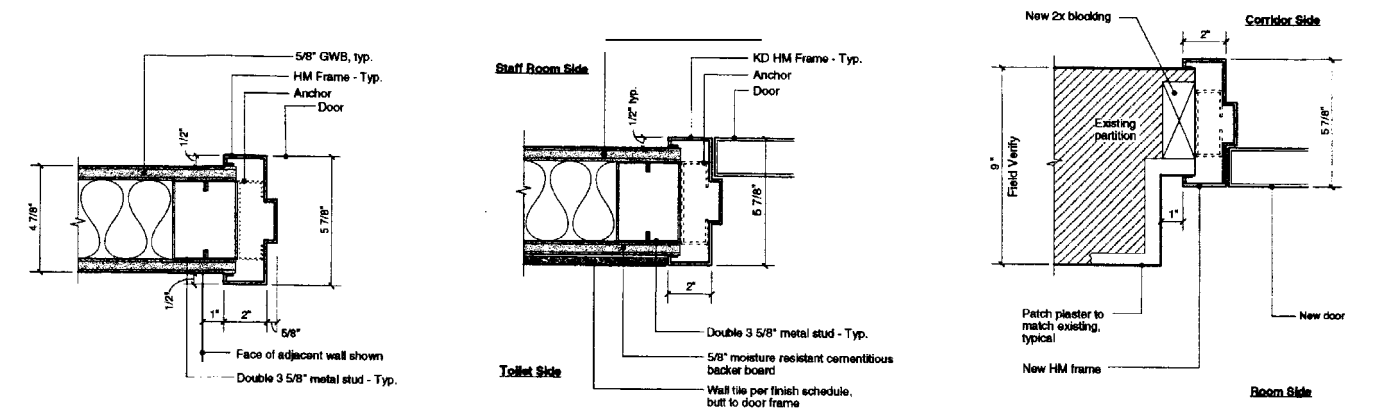

Richards Wing

Seventh Floor

Renovations

Maine Medical Center
Portland, Maine 04102

Architect
Winton Scott Architects
Portland, Maine

Mechanical Engineering
Mechanical Systems Engineers
Yarmouth, Maine

Electrical Engineering
Bartlett Design
Bath, Maine

Door Schedules
and Types

A 8

Scale: 3" = 1'-0"
May 28, 2004

DOOR & FRAME SCHEDULE BY BASE BID

General		Door				Frame															
Door No.	Size (W x H)	Thickness	Material	Finish	Type	Material	Finish	Type	Material	Finish	Type	Material	Finish	Type	Material	Finish	Type	Material	Finish	Type	
3	3'-0" x 6'-10"	1 3/4"	WD	NAT	D1	HM	PTD	F1	H3	J3	HW1	-	60 min.	DP-1	-	-	-	-	-	-	-
4	3'-0" x 6'-10" (Field Verify)	1 3/4"	WD	NAT	D2	Exist HM	PTD	F1	-	-	HW2	-	-	DP-1	-	-	-	-	-	-	-
6	3'-0" x 6'-10" (Field Verify)	1 3/4"	WD	NAT	D2	Exist HM	PTD	F1	-	-	HW2	-	-	DP-1	-	-	-	-	-	-	-
7	3'-0" x 6'-10"	-	-	-	-	HM	PTD	F1	H4	J4	-	-	-	-	-	-	-	-	-	-	-
8	3'-0" x 6'-10"	-	-	-	-	HM	PTD	F1	H4	J4	-	-	-	-	-	-	-	-	-	-	-
9	3'-0" x 6'-10" (Field Verify)	1 3/4"	WD	NAT	D1	Exist HM	PTD	F1	-	-	HW3	-	-	-	-	-	-	-	-	-	-
10	3'-0" x 6'-10"	1 3/4"	Exist. WD	S & P	D1	Exist. HM	PTD	F1	-	-	HW3	-	-	-	-	-	-	-	-	-	-
11	3'-0" x 6'-10"	1 3/4"	WD	NAT	D2A	Exist. HM	PTD	F1	H1 (Sm)	J1 (Sm)	HW5	-	20 min.	DP-1	-	-	-	-	-	-	-
12	(PR) 3'-0" x 7'-0"	1 3/4"	WD	NAT	D2A	HM	PTD	F2	H1 (Sm)	J1 (Sm)	HW5	-	20 min.	DP-1	-	-	-	-	-	-	-
13	3'-0" x 6'-10"	1 3/4"	Exist. WD	S & P	D1	Exist. HM	PTD	F1	-	-	HW5	-	-	-	-	-	-	-	-	-	-
14	3'-0" x 6'-10"	1 3/4"	WD	NAT	D1	HM	PTD	F1	-	-	HW7	-	20 min.	-	-	-	-	-	-	-	-
16	3'-0" x 6'-10"	1 3/4"	Exist. WD	S & P	D1	Exist. HM	PTD	F1	H1	J1	-	-	-	-	-	-	-	-	-	-	-
16	3'-0" x 6'-10"	1 3/4"	Exist. WD	S & P	D1	HM	PTD	F1	H1	J1	-	-	-	-	-	-	-	-	-	-	-
17	6'-0" x 8'-10" (Field verify)	1 3/4"	WD	NAT	D2A	Exist. HM	PTD	F1	-	-	HW5	-	45 min.	DP-1	-	-	-	-	-	-	-
18	3'-0" x 6'-10" (field verify)	1 3/4"	WD	NAT	D2A	Exist. HM	PTD	F1	-	-	HW2	-	45 min.	DP-1	-	-	-	-	-	-	-
19	3'-0" x 6'-10" (field verify)	1 3/4"	Exist. WD	S & P	D1	Exist. HM	PTD	F1	-	-	-	-	-	-	-	-	-	-	-	-	-
20	2'-0" x 6'-10"	1 3/4"	Exist. WD	RFN	D1	Exist. HM	PTD	F1	-	-	-	-	-	-	-	-	-	-	-	-	-
21	3'-0" x 6'-10"	1 3/4"	Exist. WD	S & P	D1	Exist. HM	PTD	F1	-	-	HW3	-	-	-	-	-	-	-	-	-	-
22	2'-0" x 6'-10"	1 3/4"	Exist. WD	S & P	D1	Exist. HM	PTD	F1	-	-	-	-	-	-	-	-	-	-	-	-	-
23	3'-0" x 6'-10"	1 3/4"	Exist. WD	S & P	D1	Exist. HM	PTD	F1	-	-	HW5	-	-	-	-	-	-	-	-	-	-
24	3'-0" x 6'-10"	1 3/4"	Exist. HM	PTD	D1	Exist. HM	PTD	F1	-	-	HW5	-	-	-	-	-	-	-	-	-	-
25	2'-0" x 6'-10"	1 3/4"	Exist. WD	S & P	D1	Exist. HM	PTD	F1	-	-	-	-	-	-	-	-	-	-	-	-	-

INTERIOR WINDOW SCHEDULE BY ALTERNATE #5

General		Door				Frame															
Door No.	Size (W x H)	Thickness	Material	Finish	Type	Material	Finish	Type	Material	Finish	Type	Material	Finish	Type	Material	Finish	Type	Material	Finish	Type	
W115	Field Verify	-	-	-	-	Exist. HM	PTD	F3	-	-	-	-	-	-	-	-	-	-	-	-	-
W116	Field Verify	-	-	-	-	Exist. HM	PTD	F3	-	-	-	-	-	-	-	-	-	-	-	-	-

LEGEND

- S & P Sand out all scratches, fill gouges and provide 2 coats satin polyurethane.
- Exist WD Existing wood door.
- Exist HM Existing metal door or frame.
- PTD Painted
- WD New wood door.
- HM New metal door or frame.
- RFN Sand to bare wood, stain & provide (3) coats polyurethane. Match adjacent refinished birch doors.


DP-1 Door Protection Type 1 (By Section 10205):

- PVC 36" high door protection, both sides, surface mounted.
- Hinge edge protector recessed flush with door surface.
- Strike edge protector recessed flush with door surface.


Note

- Field verify door sizes at all locations where new doors to be installed in existing door frames.


T1 Rubber/ CPT Transition Strip
6" = 1'-0"

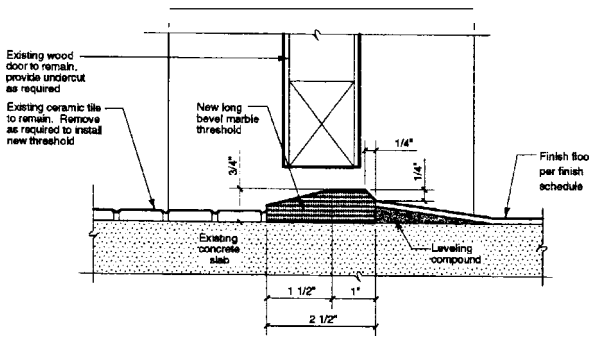

T3 Marble Threshold @ Shower
6" = 1'-0"

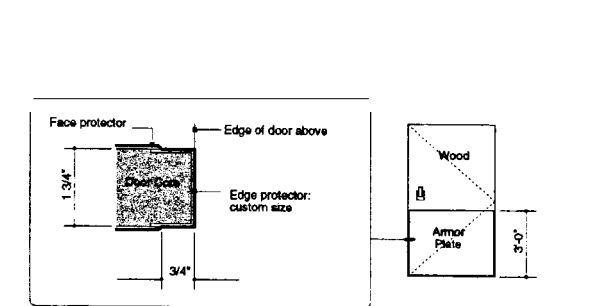

Door Overlay Plan Detail

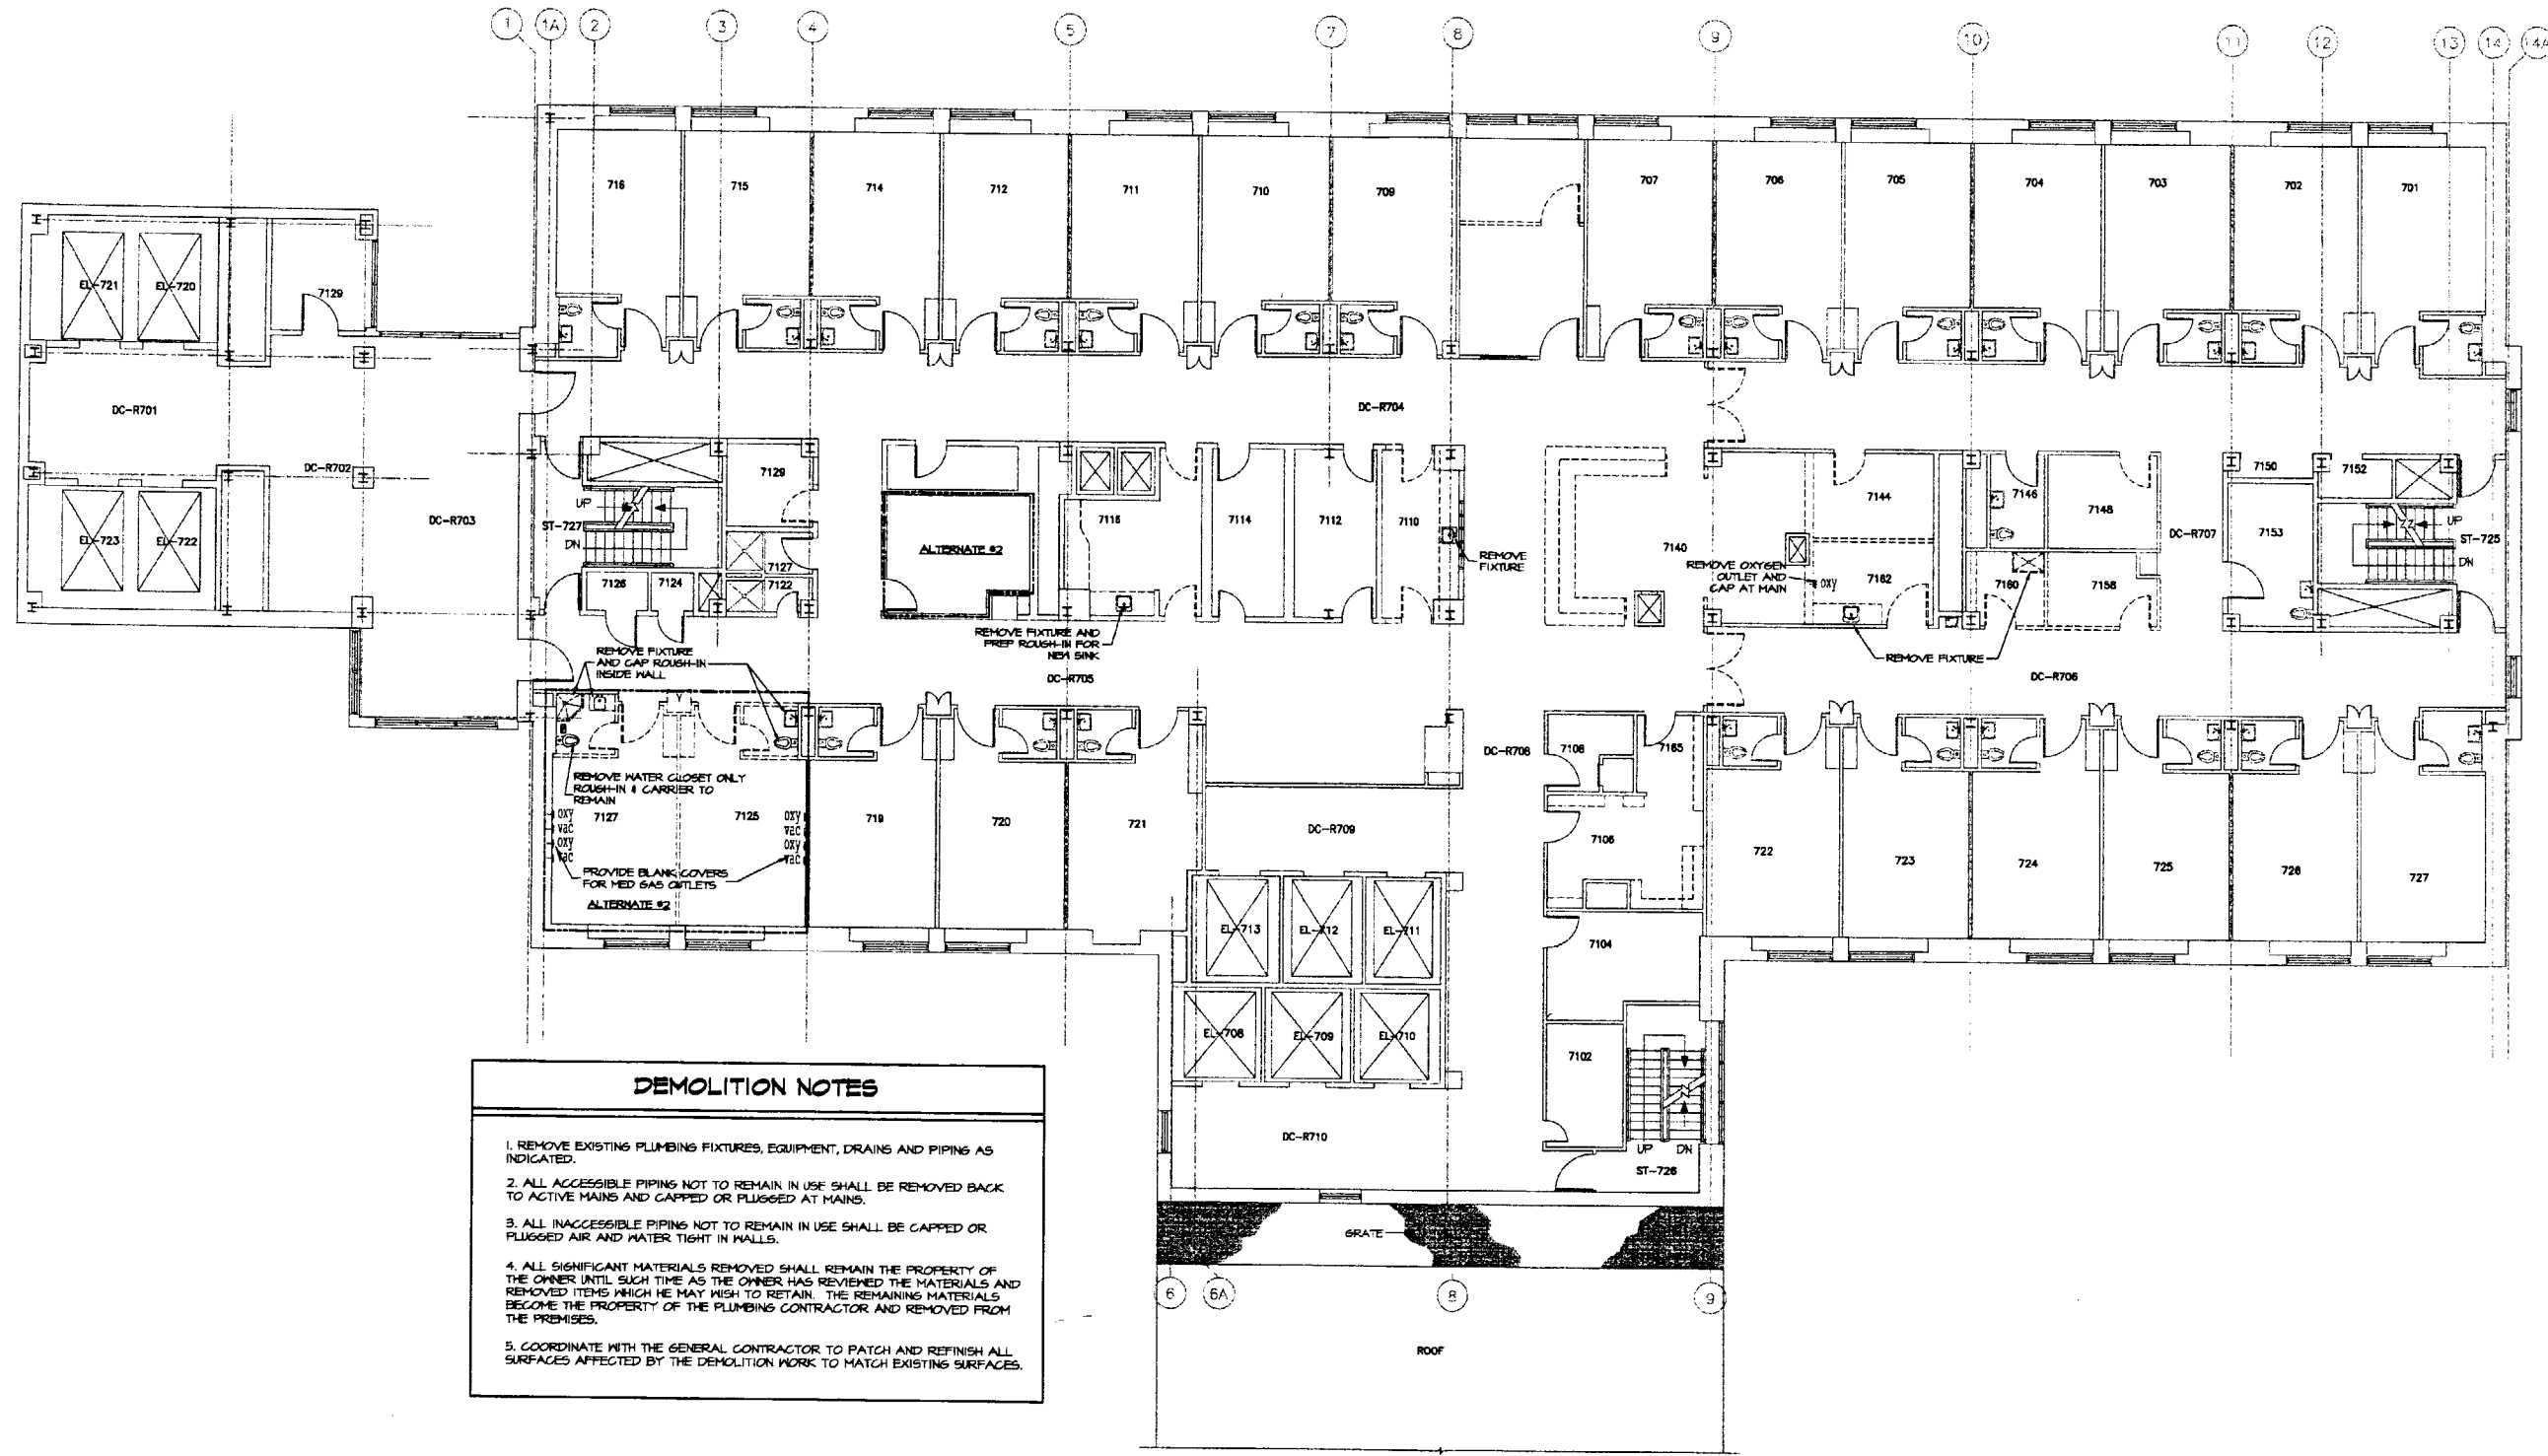

DEMOLITION NOTES

1. REMOVE EXISTING PLUMBING FIXTURES, EQUIPMENT, DRAINS AND PIPING AS INDICATED.
2. ALL ACCESSIBLE PIPING NOT TO REMAIN IN USE SHALL BE REMOVED BACK TO ACTIVE MAINS AND CAPPED OR PLUGGED AT MAINS.
3. ALL INACCESSIBLE PIPING NOT TO REMAIN IN USE SHALL BE CAPPED OR PLUGGED AIR AND WATER TIGHT IN WALLS.
4. ALL SIGNIFICANT MATERIALS REMOVED SHALL REMAIN THE PROPERTY OF THE OWNER UNTIL SUCH TIME AS THE OWNER HAS REVIEWED THE MATERIALS AND REMOVED ITEMS WHICH HE MAY WISH TO RETAIN. THE REMAINING MATERIALS BECOME THE PROPERTY OF THE PLUMBING CONTRACTOR AND REMOVED FROM THE PREMISES.
5. COORDINATE WITH THE GENERAL CONTRACTOR TO PATCH AND REFINISH ALL SURFACES AFFECTED BY THE DEMOLITION WORK TO MATCH EXISTING SURFACES.

Richards Wing
Seventh Floor
Renovations

Maine Medical Center
Portland, Maine 04102

Architect
Winton Scott Architects
Portland, Maine


Mechanical Engineering
Mechanical Systems Engineers
Yarmouth, Maine

Electrical Engineering
Bartlett Design
Bath, Maine

PLUMBING
DEMOLITION
PLAN

PD1


Scale: 1/8" = 1' - 0"
May 14, 2004



MECHANICAL SYSTEMS ENGINEERS
ROYAL RIVER CENTER, UNIT #10
10 FOREST FALLS DRIVE
YARMOUTH, MAINE 04096
VOICE: (207) 848-1441
FAX: (207) 848-1443
mechset@maine.mse.com
© COPYRIGHT 2004
M.S.E. Proj. 0408



May 28, 2004 - 3:54 pm
\\Maine\Projects\0408\Drawings\0408-P01.dwg

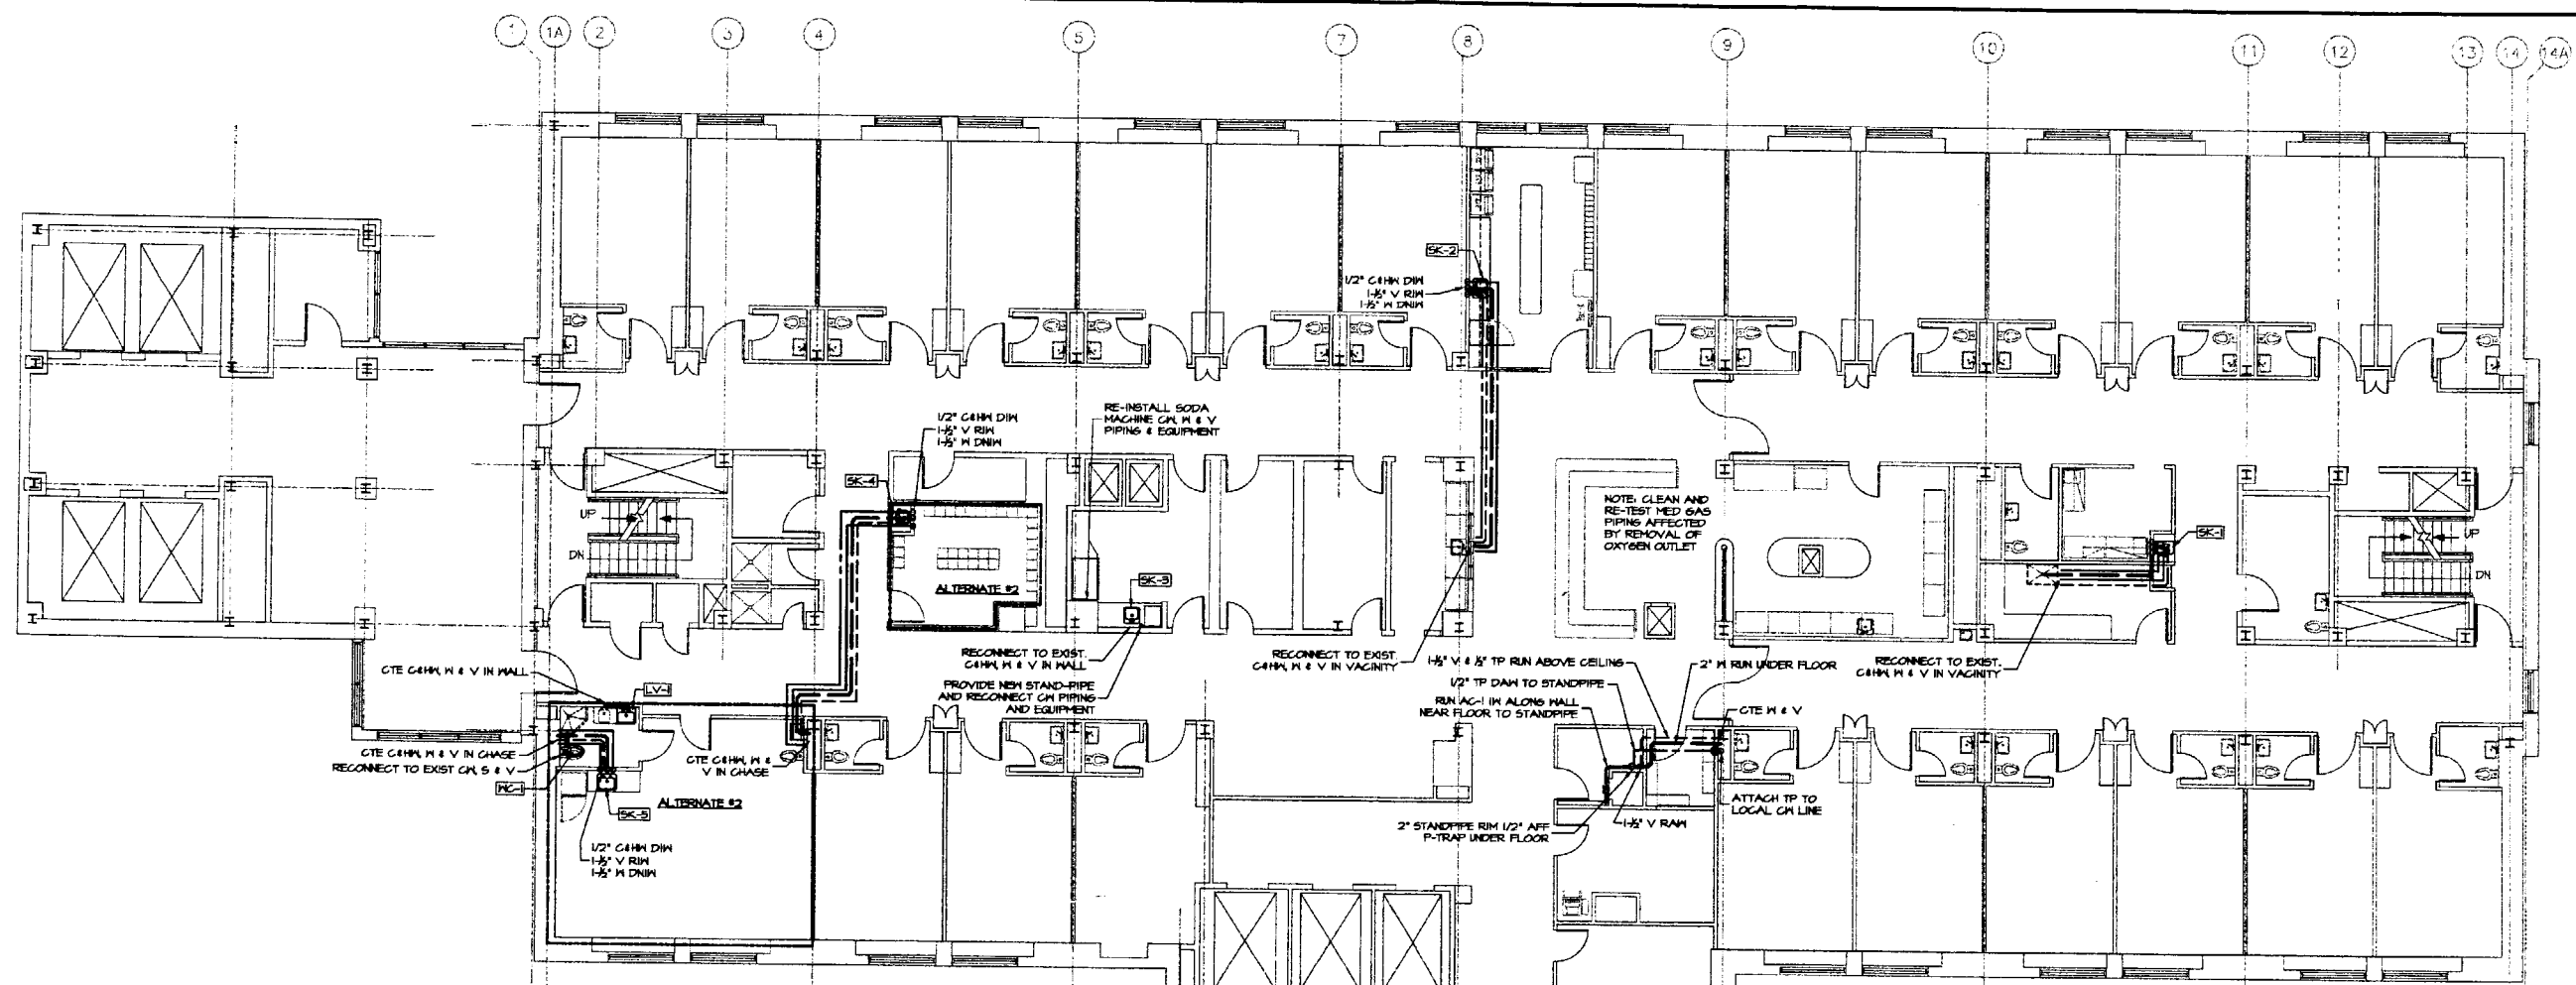

Richards Wing
Seventh Floor

Renovations

Maine Medical Center
Portland, Maine 04102

Architect
Winton Scott Architects
Portland, Maine

Mechanical Engineering
Mechanical Systems Engineers
Yarmouth, Maine

Electrical Engineering
Bartlett Design
Bath, Maine

NEW
PLUMBING
PLAN


P1

Scale: 1/8" = 1' - 0"
May 14, 2004


DEVIATIONS & SYMBOLS	
ADA ACT	AMERICANS WITH DISABILITIES
APF	ABOVE FINISHED FLOOR
CO	CLEANOUT
CM	COLD WATER
CHM	COLD & HOT WATER
DAH	DROP AT WALL
DIC	DROP IN CHASE
DM	DROP IN MALL
DN	DOWN
DNIC	DOWN IN CHASE
DNIM	DOWN IN MALL
FD	FLOOR DRAIN
PFE	FINISHED FLOOR ELEVATION
GC	GENERAL CONTRACTOR
GPF	GALLONS PER FLUSH
HM	110 DEF. F. HOT WATER
LV	LAVATORY
MTG	MOUNTING
PC	PLUMBING CONTRACTOR
RAH	RISE AT MALL
RIC	RISE IN CHASE
RIH	RISE IN MALL
S	SANITARY WASTE
SA	SHOCK ABSORBER
TYP	TYPICAL
UAM	UP AT MALL
UIC	UP IN CHASE
UIM	UP IN MALL
V	VENT
VIF	VERIFY IN FIELD
W	WASTE
W	WITH
WC	WATER CLOSET
---	SAN WASTE PIPING ABOVE FLOOR
---	SAN WASTE PIPING BELOW FLOOR
---	VENT PIPING ABOVE FLOOR
---	COLD WATER PIPING
---	HOT WATER PIPING
○	BALL VALVE
⊘	CHECK VALVE
—○—	DROPRISE IN LINE
—○—	LINE UP TO FLOOR ABOVE
—○—	TEE - DROP
⊖	SHOCK ABSORBER
—	UNION
□	FLOOR DRAIN
LV#	FIXTURE/EQUIPMENT NUMBER TAG

- ### GENERAL NOTES
- All work shall be in accordance with the Maine State Plumbing Code, local codes and ordinances, National Fire Code (NFPA), or these plans or specifications, whichever is more strict.
 - All drawings are schematic only, and are intended to indicate the intent, extent, and general arrangement of work. They are not meant to show every fitting, change of direction or every situation. Verify locations in the field. Work indicated shall be furnished complete to perform the function intended.
 - All plumbing fixtures shall be back vented. This contractor shall make all final plumbing connections to equipment/ fixtures provided by other contractors.
 - All piping shall run concealed above ceilings, in walls, in soffits and in chases unless noted otherwise.
 - No structural members shall be cut without approval of the Architect.
 - All piping shall be supported from the building structure. All piping drops to fixtures shall be anchored solid to walls with a steel support bracket with adjustable clip.
 - All water piping shall be installed parallel to building lines and pitched to low points. Provide drain-offs at low points. Piping shall be run neatly grouped together when practical.
 - All pipe penetrations through a fire rated wall or floor shall be cast iron, steel or copper and rated to match the rating of the wall, as per the NFPA.
 - All sanitary waste piping less than 3" shall pitch down at 1/8" per L.F. All 3" and larger piping shall pitch at 1/4" per L.F.

PLUMBING FIXTURE SCHEDULE							
TAG	FIXTURE	CW	HW	WASTE	VENT	REMARKS	MTG AFF
WC-1	WATER CLOSET, MALL, ADA	1"	-	4"	2"	1/2" SPP, VC, RETROFIT, EXPOSED FV, MOUNT ON EXIST CARRIER	RM 177
LV-1	LAVATORY, MALL, ADA	1/2"	1/2"	1-1/2"	1-1/2"	VC, SINGLE LEVER FAUCET, MALL CARRIER MOUNTED	RM 547
SK-1	COUNTER W/ SINK, HANDWASH, HDG W/ EYEWASH - ADA	1/2"	1/2"	1-1/2"	1-1/2"	BOWL & COUNTER BY G.C., SINGLE HANDLE FAUCET, EMERGENCY MIXING VALVE	
SK-2	SINK, SINGLE BOWL, UTILITY - ADA	1/2"	1/2"	1-1/2"	1-1/2"	S.S. SINGLE BOWL, COUNTER MTD, BRIST BLADE GOOSENECK FAUCET	
SK-3	SINK, SINGLE BOWL, UTILITY - ADA	1/2"	1/2"	1-1/2"	1-1/2"	S.S. SINGLE BOWL, COUNTER MTD, BRIST BLADE GOOSENECK FAUCET	
SK-4	COUNTER W/ SINK, HANDWASH, HDG W/ EYEWASH - ADA	1/2"	1/2"	1-1/2"	1-1/2"	BOWL & COUNTER BY G.C., SINGLE HANDLE FAUCET, EMERGENCY MIXING VALVE	
SK-5	SINK, SINGLE BOWL, UTILITY - ADA	1/2"	1/2"	1-1/2"	1-1/2"	S.S. SINGLE BOWL, COUNTER MTD, BRIST BLADE GOOSENECK FAUCET	

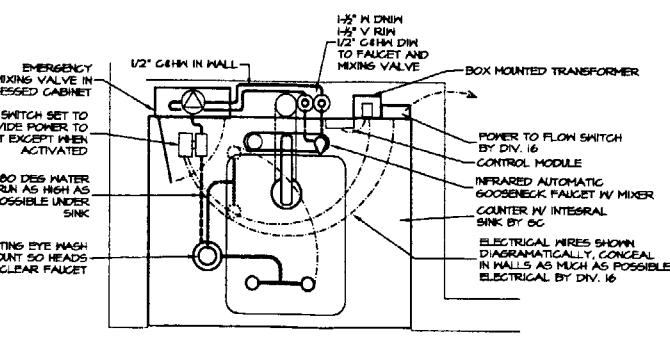


SINK W/ EYEWASH DETAIL
SCALE: NONE



MECHANICAL SYSTEMS ENGINEERS
ROYAL RIVER CENTER, UNIT #10
10 FOREST FALLS DRIVE
YARMOUTH, MAINE 04098
VOICE: (207) 848-1441
FAX: (207) 848-1443
mechsys@maine.me
© 2004 M.S.E.
M.S.E. Proj. 0408

May 20, 2004 - 3:54 PM
 W:\Maine\Projects\0408\Drawings\0408-P1.dwg

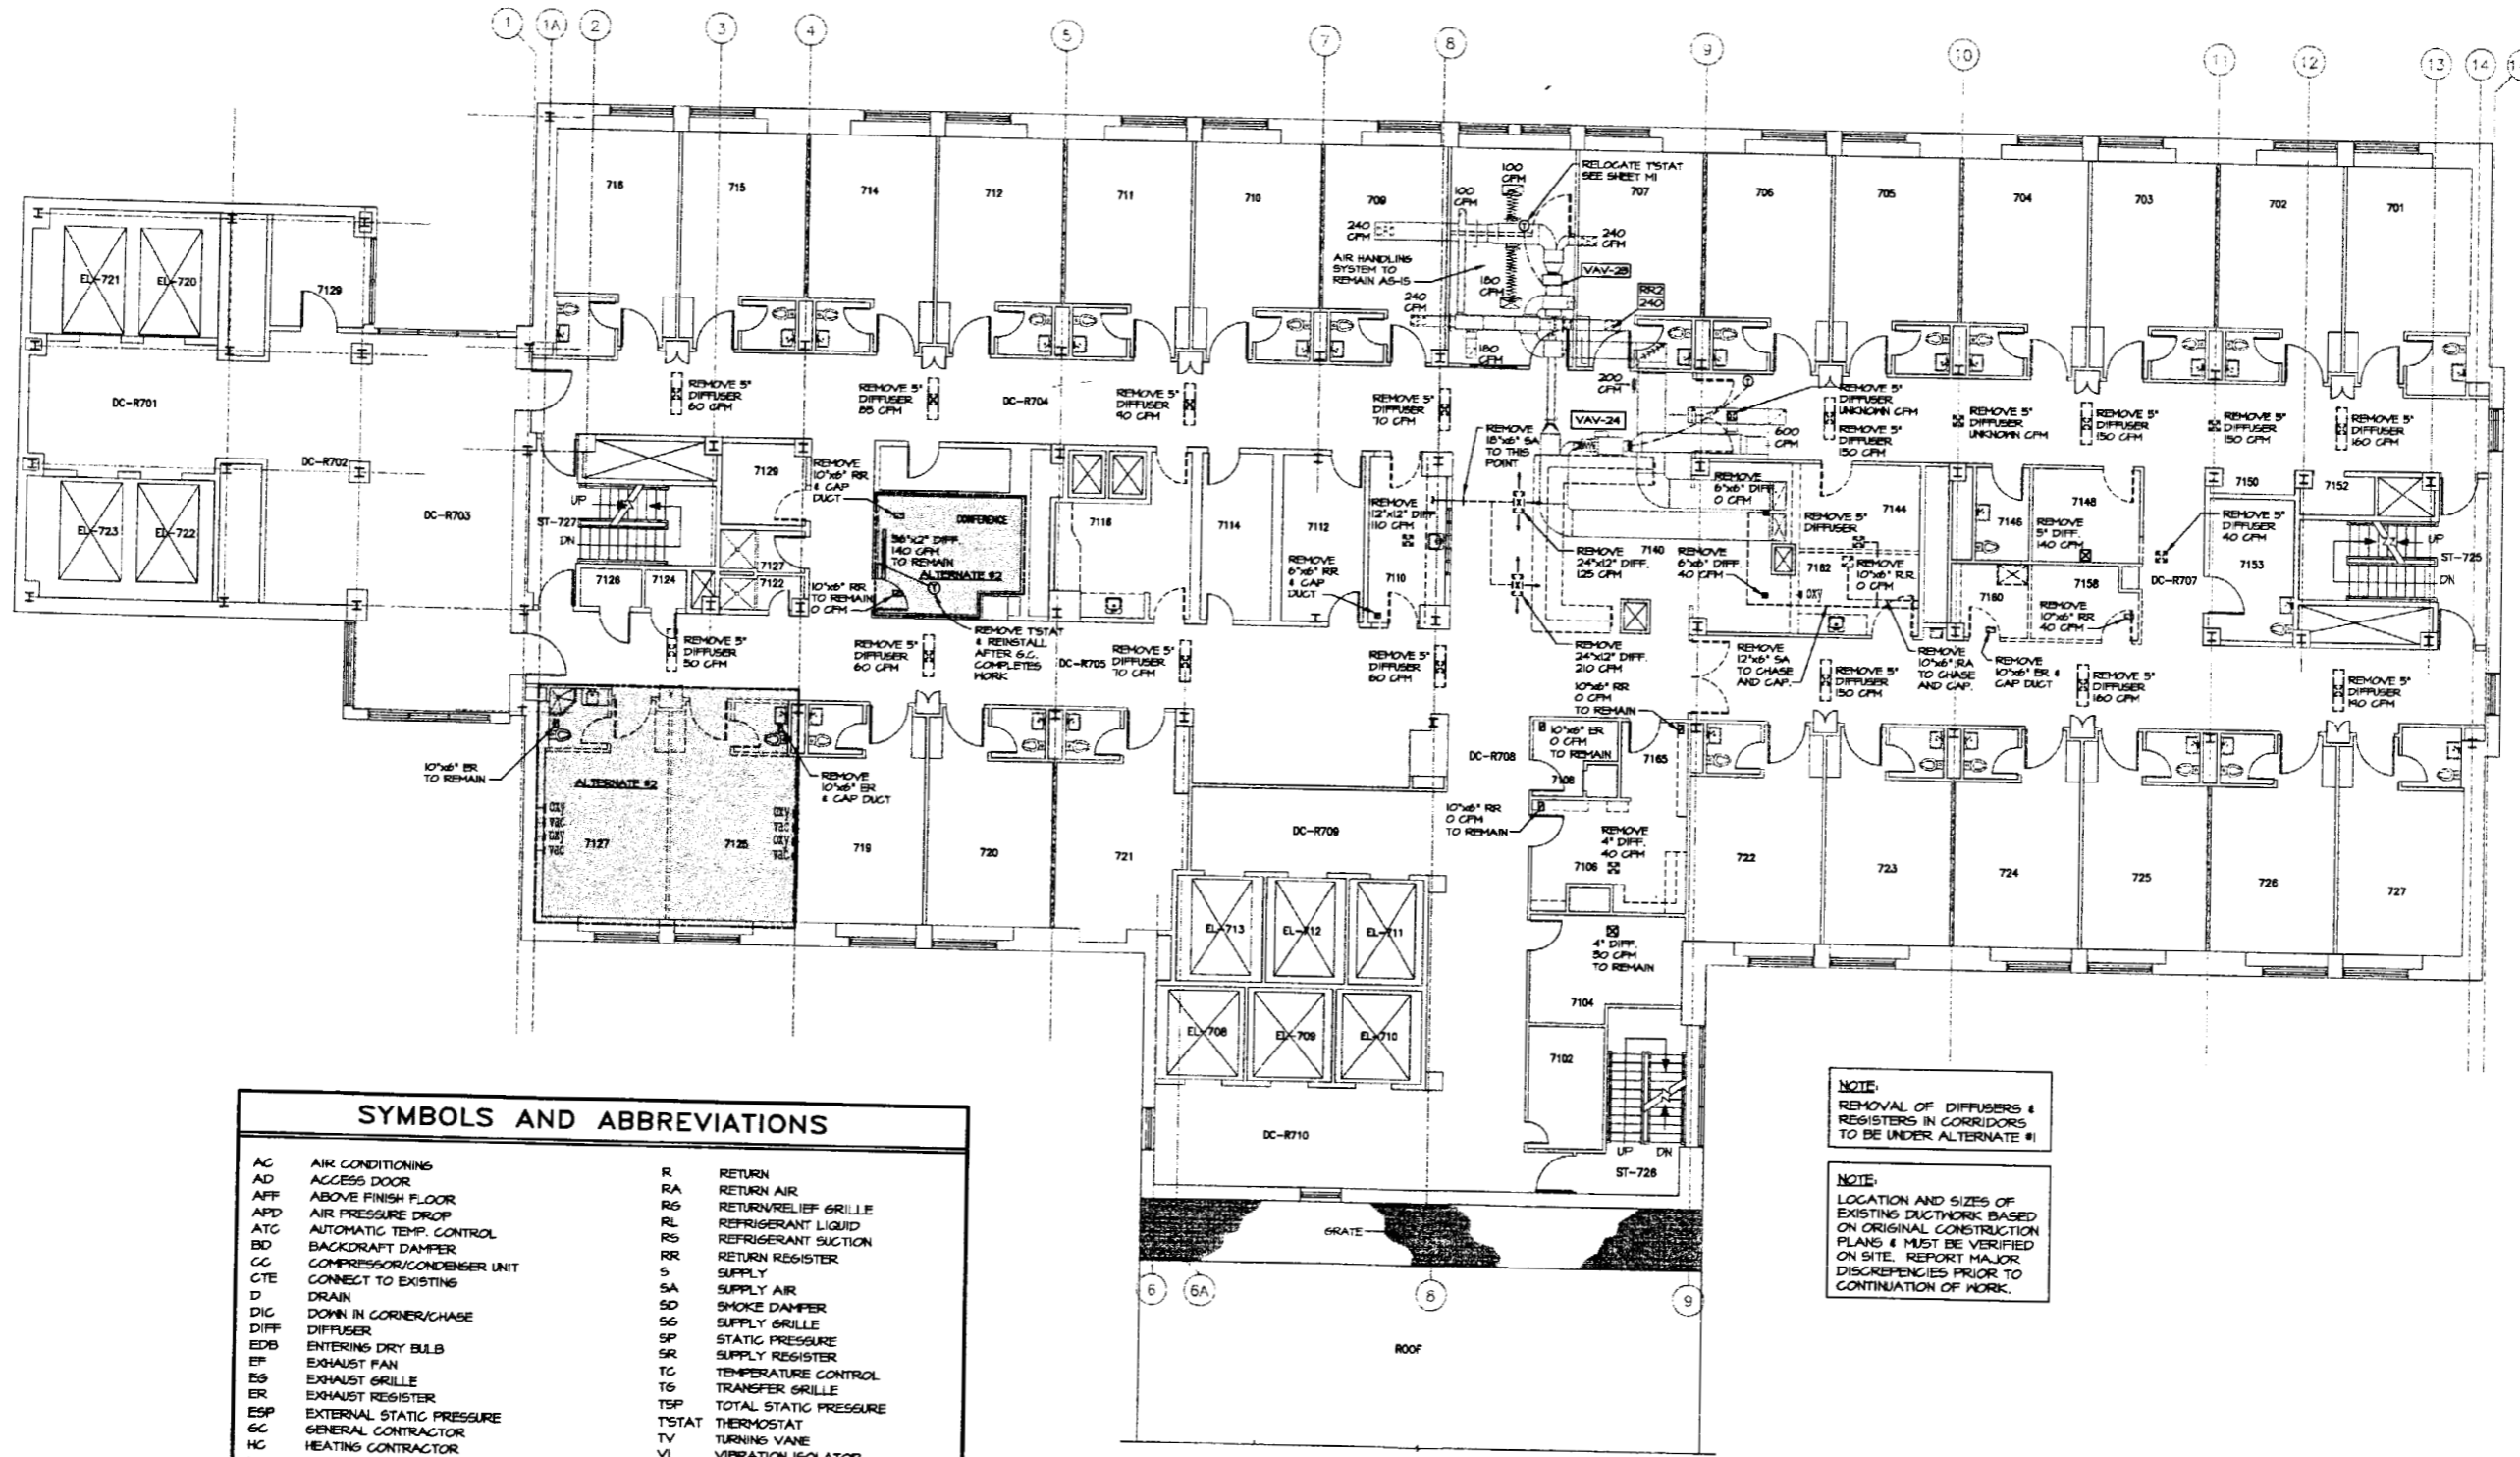

SYMBOLS AND ABBREVIATIONS			
AC	AIR CONDITIONING	R	RETURN
AD	ACCESS DOOR	RA	RETURN AIR
AFF	ABOVE FINISH FLOOR	RG	RETURN/RELIEF GRILLE
APD	AIR PRESSURE DROP	RL	REFRIGERANT LIQUID
ATC	AUTOMATIC TEMP. CONTROL	RS	REFRIGERANT SUCTION
BD	BACKDRAFT DAMPER	RR	RETURN REGISTER
CC	COMPRESSOR/CONDENSER UNIT	S	SUPPLY REGISTER
CTE	CONNECT TO EXISTING	SA	SUPPLY AIR
D	DRAIN	SD	SMOKE DAMPER
DIC	DOWN IN CORNER/CHASE	SG	SUPPLY GRILLE
DIFF	DIFFUSER	SP	STATIC PRESSURE
EDB	ENTERING DRY BULB	SR	SUPPLY REGISTER
EF	EXHAUST FAN	TC	TEMPERATURE CONTROL
EG	EXHAUST GRILLE	TG	TRANSFER GRILLE
ER	EXHAUST REGISTER	TSP	TOTAL STATIC PRESSURE
ESP	EXTERNAL STATIC PRESSURE	TSTAT	THERMOSTAT
GC	GENERAL CONTRACTOR	TV	TURNING VANE
HC	HEATING CONTRACTOR	VI	VIBRATION ISOLATOR
HVAC	HEATING & VENTILATING		
HVAC	HEATING, VENTILATING AND AIR CONDITIONING	— L —	REFRIGERANT LIQUID PIPING
LAT	LEAVING AIR TEMPERATURE	— S —	REFRIGERANT SUCTION PIPING
LDB	LEAVING DRY BULB	⊕	THERMOSTAT
LWB	LEAVING WET BULB	⊕	CONNECT TO EXISTING
MD	MANUAL DAMPER	⊕	MANUAL DAMPER
MOD	MOTOR OPERATED DAMPER	⊕	FLEXIBLE DUCT
NTS	NOT TO SCALE	⊕	SUPPLY AIR DUCT
OD	OUTSIDE DIMENSION	⊕	RETURN / RELIEF AIR DUCT
P	PUMP	⊕	ROUND DIFFUSER W/LAY-IN PANEL
PC	PLUMBING CONTRACTOR		
PD	PUMP DISCHARGE		

NOTE:
REMOVAL OF DIFFUSERS & REGISTERS IN CORRIDORS TO BE UNDER ALTERNATE #1

NOTE:
LOCATION AND SIZES OF EXISTING DUCTWORK BASED ON ORIGINAL CONSTRUCTION PLANS & MUST BE VERIFIED ON SITE. REPORT MAJOR DISCREPANCIES PRIOR TO CONTINUATION OF WORK.

Richards Wing
Seventh Floor
Renovations

Maine Medical Center
Portland, Maine 04102

Architect
Winton Scott Architects
Portland, Maine

Mechanical Engineering
Mechanical Systems Engineers
Yarmouth, Maine

Electrical Engineering
Bartlett Design
Beth, Maine

MECHANICAL
DEMOLITION
PLAN


MD1

Scale: 1/8" = 1' - 0"

STATE OF MAINE
HERBERT L. POWERS, JR.
NO. 2190
REGISTERED PROFESSIONAL ENGINEER

MECHANICAL SYSTEMS ENGINEERS
ROYAL RIVER CENTER, UNIT #10
10 FOREST FALLS DRIVE
YARMOUTH, MAINE 04095
VOICE: (207) 848-1441
FAX: (207) 848-1443
mchsys@maine.rr.com



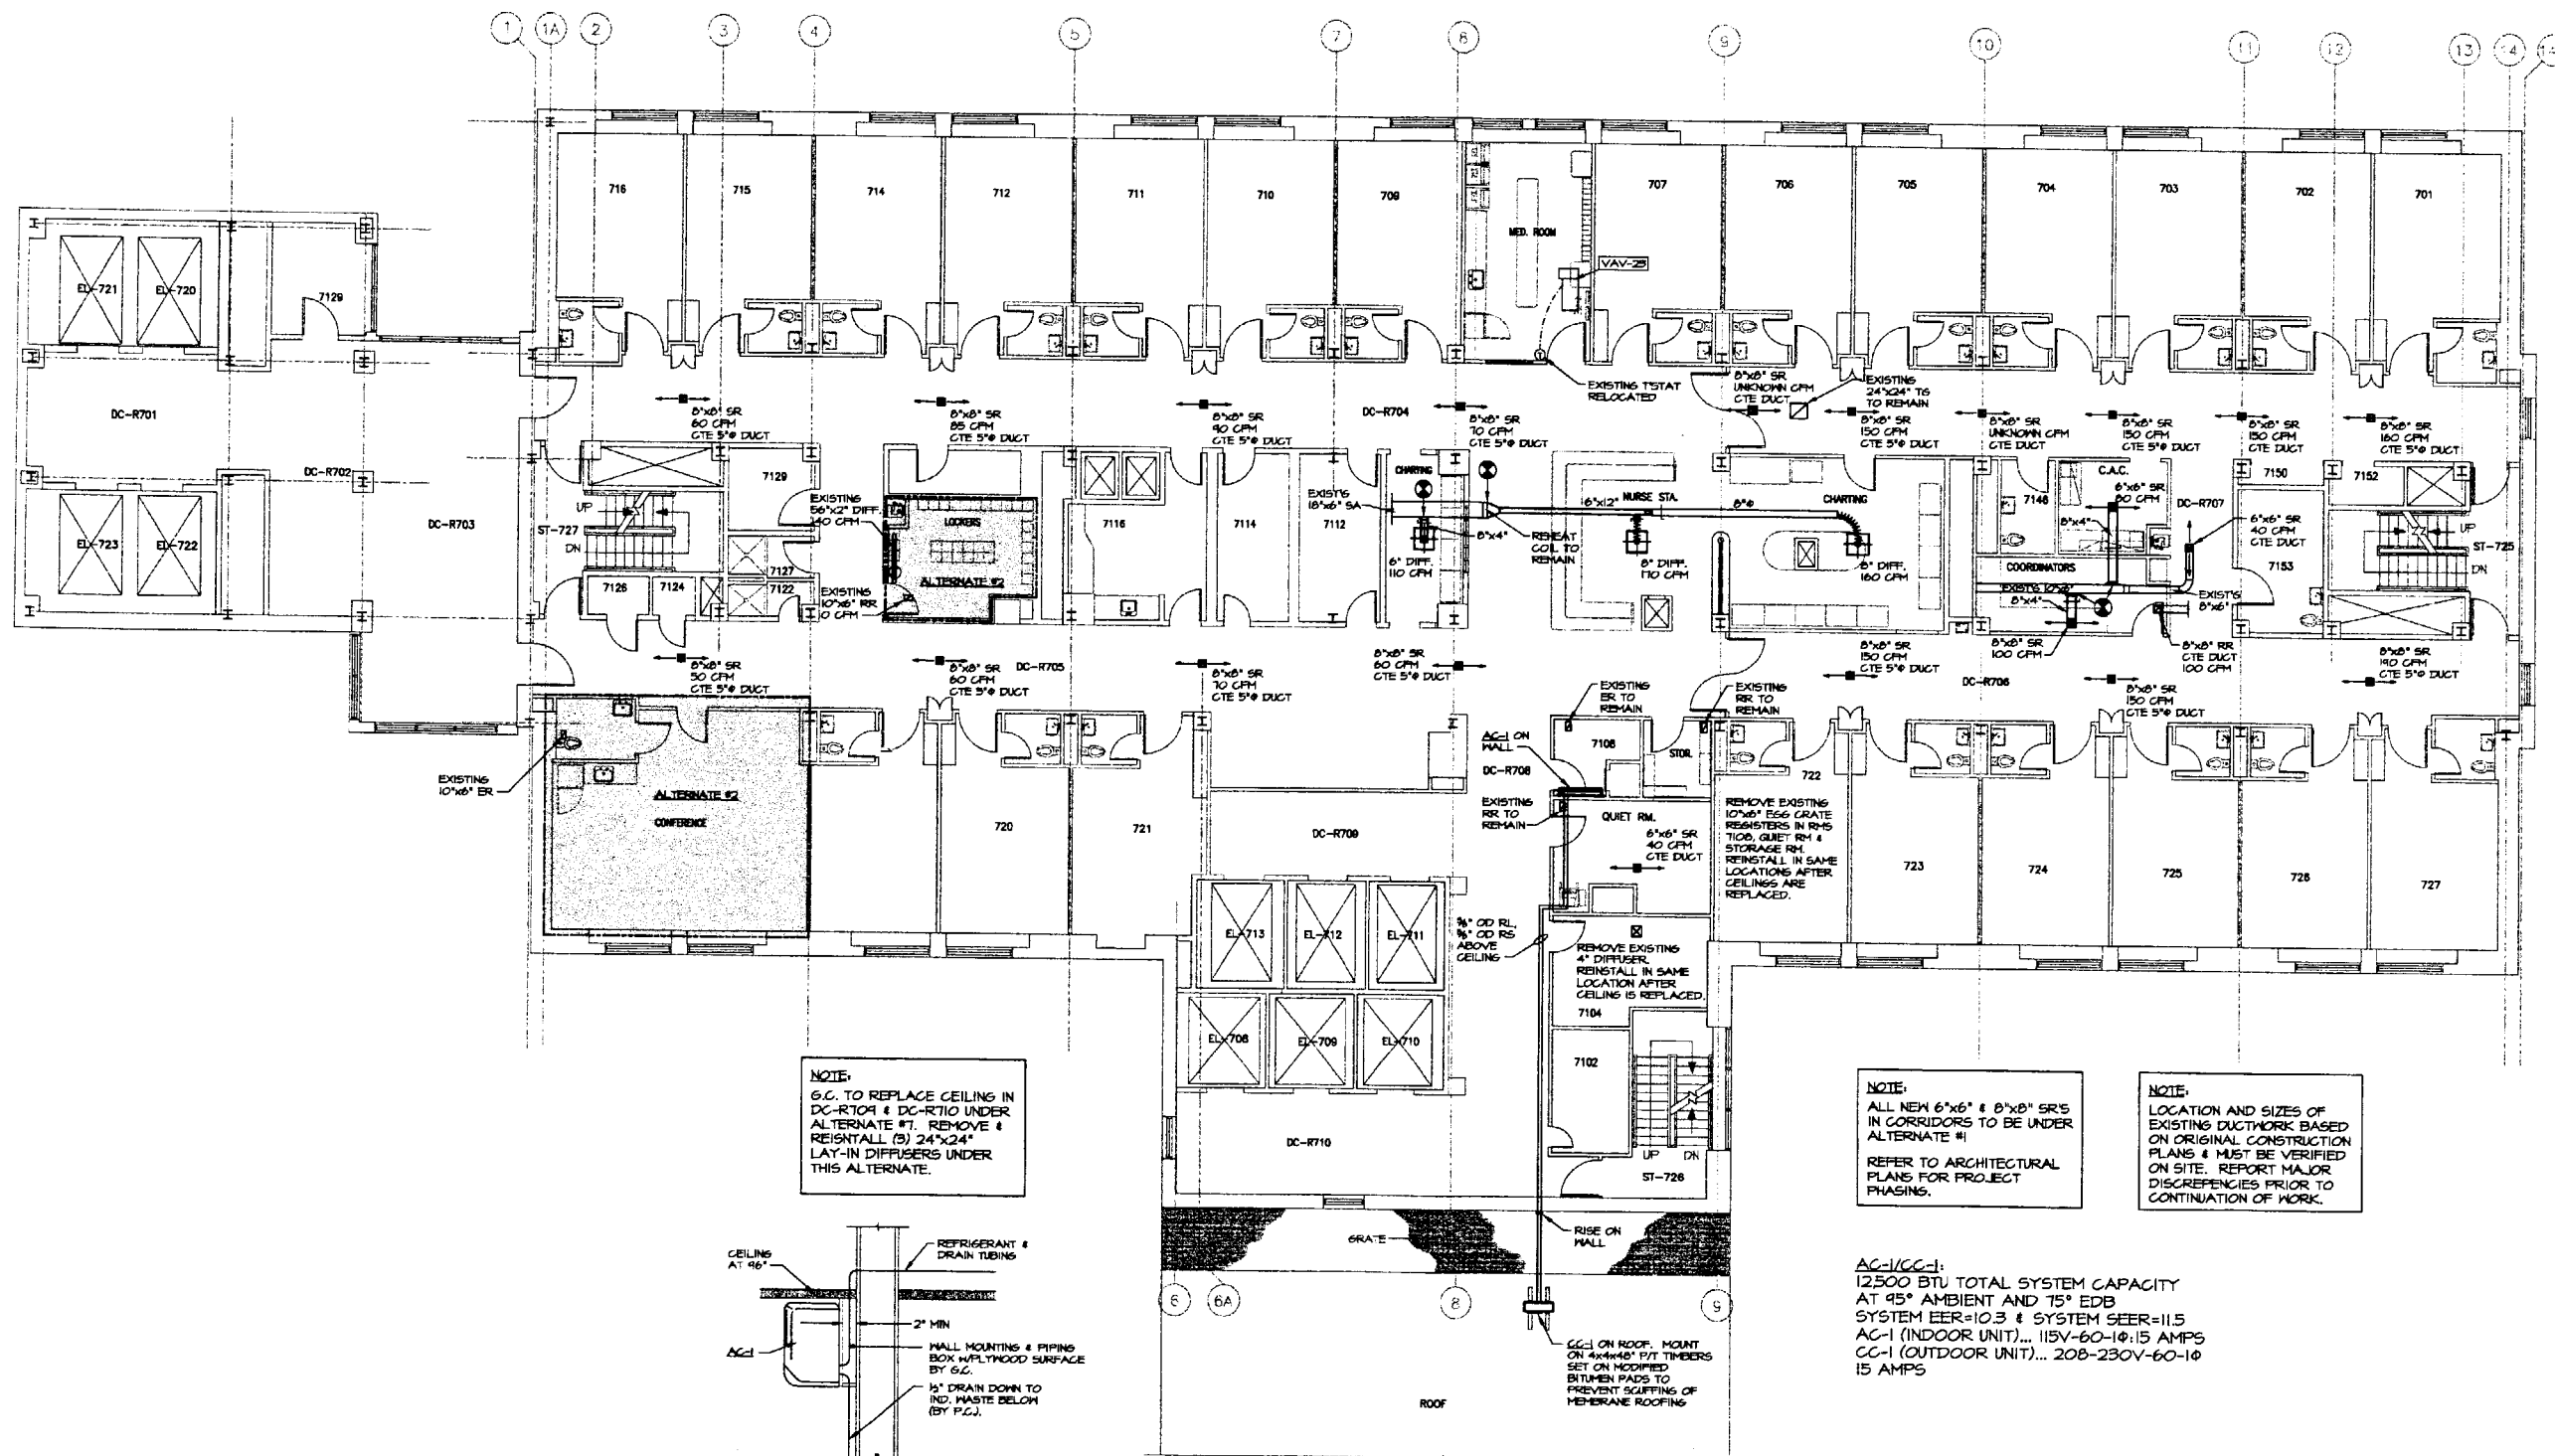


NOTE:
S.C. TO REPLACE CEILING IN DC-R709 & DC-R710 UNDER ALTERNATE #1. REMOVE & REINSTALL (3) 24"x24" LAY-IN DIFFUSERS UNDER THIS ALTERNATE.


NOTE:
ALL NEW 6"x6" & 8"x8" SR'S IN CORRIDORS TO BE UNDER ALTERNATE #1
REFER TO ARCHITECTURAL PLANS FOR PROJECT PHASING.

NOTE:
LOCATION AND SIZES OF EXISTING DUCTWORK BASED ON ORIGINAL CONSTRUCTION PLANS & MUST BE VERIFIED ON SITE. REPORT MAJOR DISCREPANCIES PRIOR TO CONTINUATION OF WORK.

AC-1/CC-1:
12500 BTU TOTAL SYSTEM CAPACITY AT 45° AMBIENT AND 15° EDB
SYSTEM EER=10.3 & SYSTEM SEER=11.5
AC-1 (INDOOR UNIT)... 115V-60-10:15 AMPS
CC-1 (OUTDOOR UNIT)... 208-230V-60-10 15 AMPS

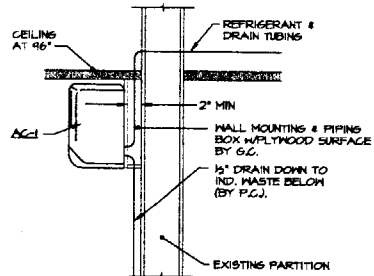

SECTION AT AC-1
NO SCALE



MECHANICAL SYSTEMS ENGINEERS
ROYAL RIVER CENTER, UNIT #10
10 FOREST FALLS DRIVE
YARMOUTH, MAINE 04088
VOICE: (207) 848-1441
FAX: (207) 848-1443
mechset@maine.rr.com
© 2004 M.S.E.
M.S.E. Proj. 0408

Richards Wing
Seventh Floor
Renovations

Maine Medical Center
Portland, Maine 04102

Architect
Winton Scott Architects
Portland, Maine


Mechanical Engineering
Mechanical Systems Engineers
Yarmouth, Maine

Electrical Engineering
Bartlett Design
Bath, Maine

NEW
MECHANICAL
PLAN

M1

Scale: 1/8" = 1' - 0"
May 14, 2004

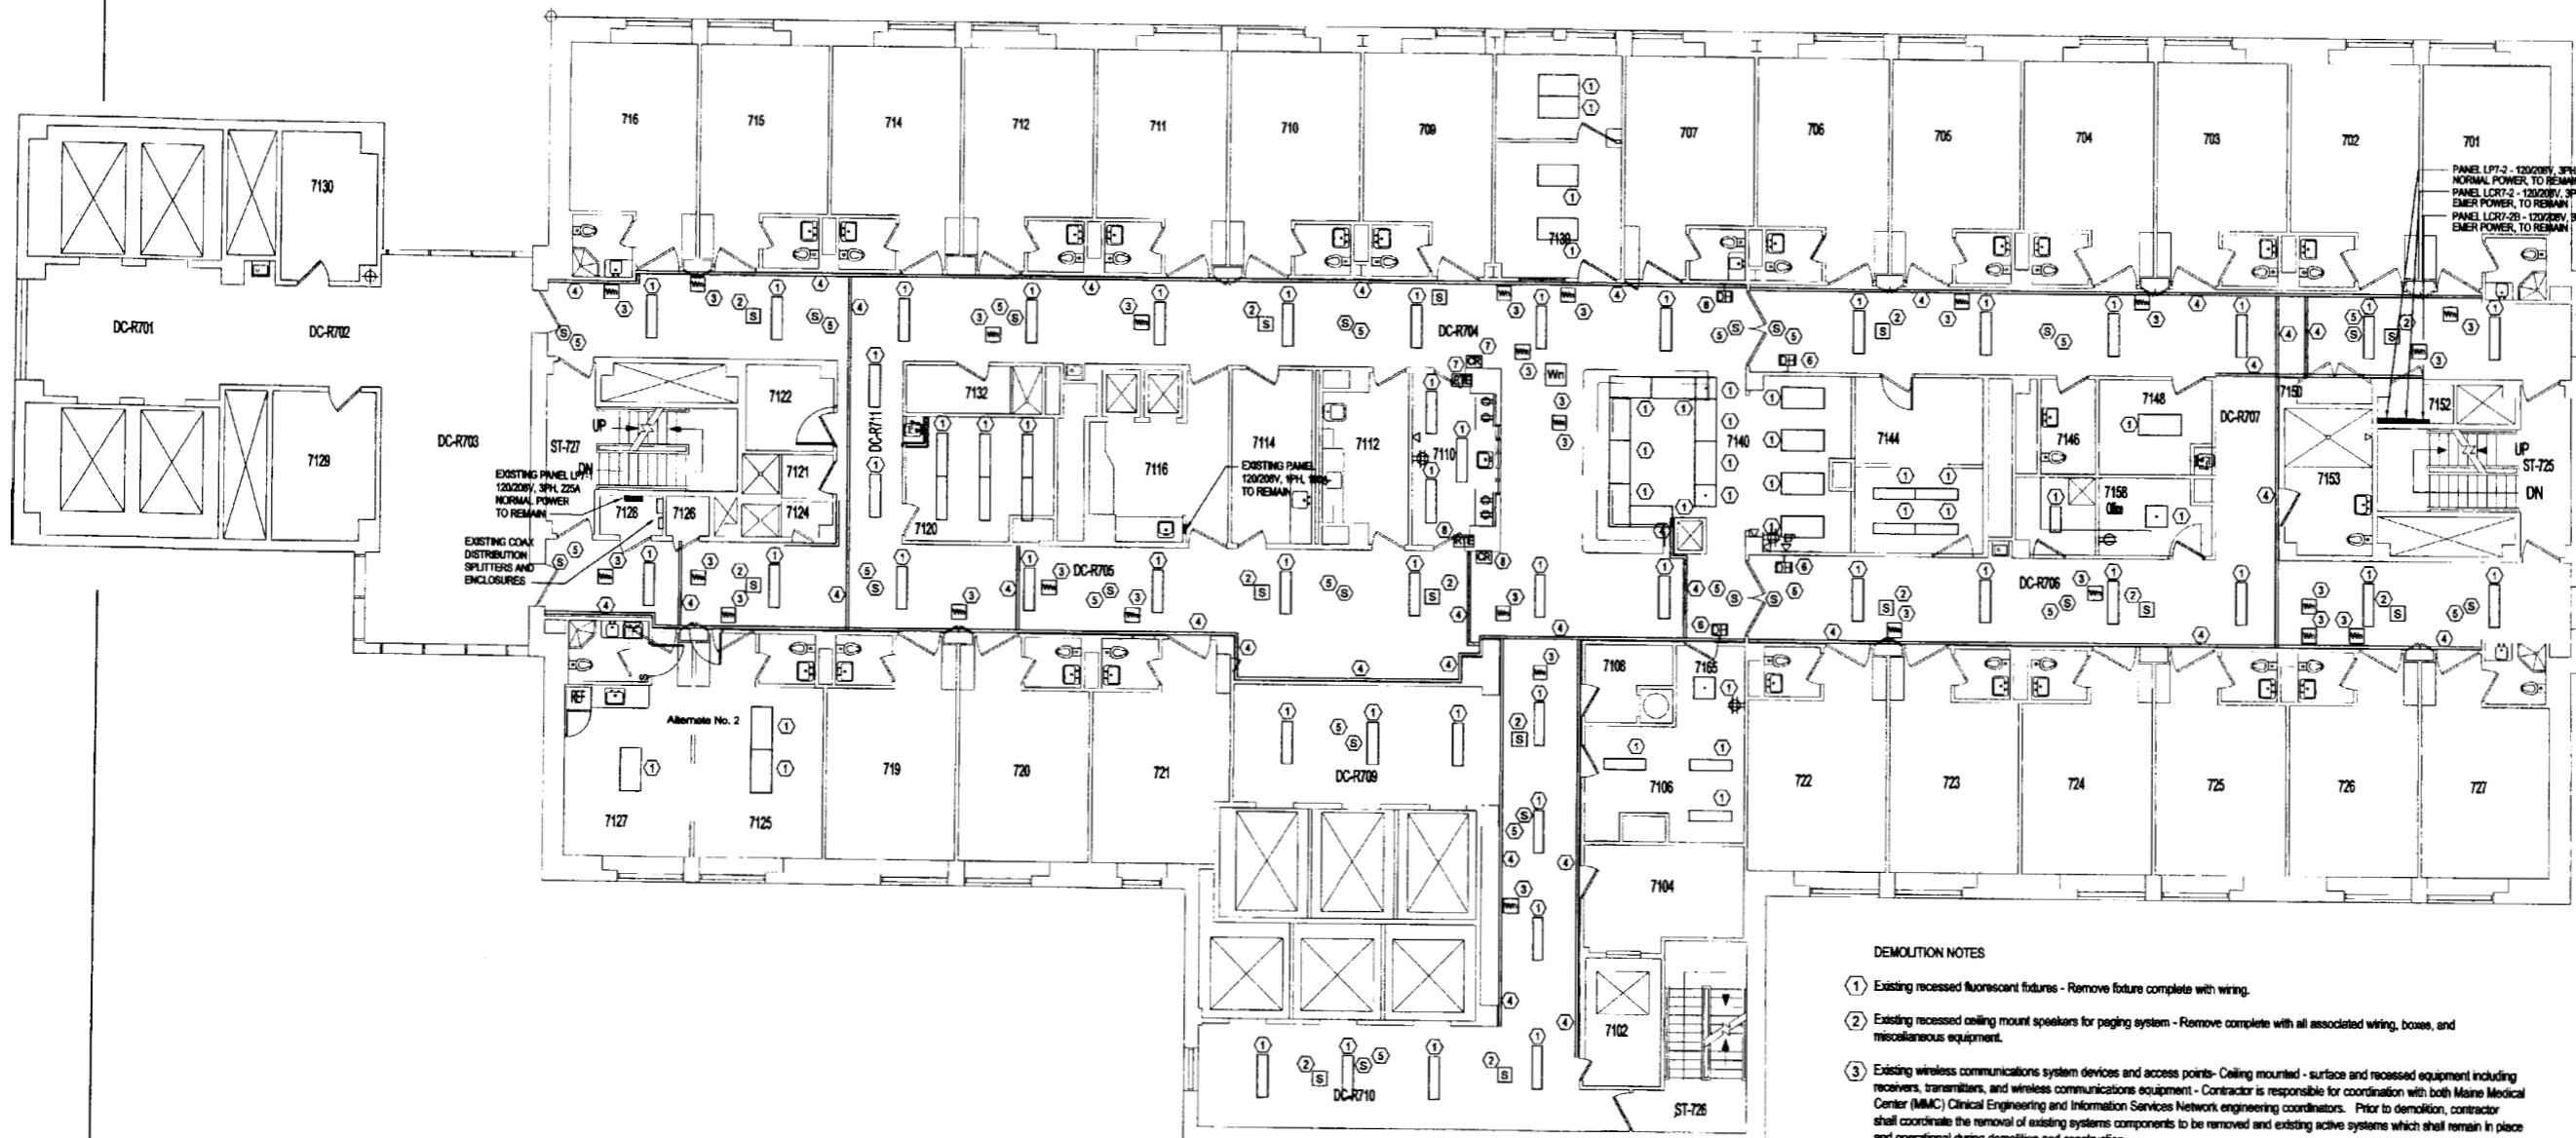

Richards Wing
Seventh Floor
Renovations

Maine Medical Center
Portland, Maine 04102

Architect
WINTON SCOTT ARCHITECTS
Portland, Maine

Mechanical Engineering
Mechanical Systems Engineers
Yarmouth, Maine

Electrical Engineering
Bartlett Design
Bath, Maine


Demolition Plan
E1

Scale: 1/8" = 1' - 0"
May 27, 2004

DEMOLITION NOTES

- ① Existing recessed fluorescent fixtures - Remove fixture complete with wiring.
- ② Existing recessed ceiling mount speakers for paging system - Remove complete with all associated wiring, boxes, and miscellaneous equipment.
- ③ Existing wireless communications system devices and access points - Ceiling mounted - surface and recessed equipment including receivers, transmitters, and wireless communications equipment - Contractor is responsible for coordination with both Maine Medical Center (MMC) Clinical Engineering and Information Services Network engineering coordinators. Prior to demolition, contractor shall coordinate the removal of existing systems components to be removed and existing active systems which shall remain in place and operational during demolition and construction.
- ④ Existing surface ceiling/wall mount wireways - There is considerable raceway to be removed should alternates be accepted which involve new ceiling work, especially in the corridors. Wiring which shall remain shall be relocated to above ceiling and properly supported and installed in raceway as directed by MMC.
- ⑤ Existing Fire Alarm Smoke Detectors to be relocated into new corridor ceiling (Alternate 1). Shall remain operational during demolition and construction.
- ⑥ Existing Magnetic Door Hold Open - to be relocated and rewired for new core area doors.
- ⑦ Existing Proximity Card Reader and Request-to-Exit device to be relocated and re-installed.
- ⑧ Existing proximity Card Reader and Request-to-Exit device to be turned over to MMC facilities personnel.


- Ⓢ Fire Alarm Smoke Detector
- Ⓢ Paging System Speaker
- ☐ Recessed Fluorescent Light Fixtures
- Ⓜ Wireless Network Access Device
- CR Card Reader
- RTE Request-to-Exit Device

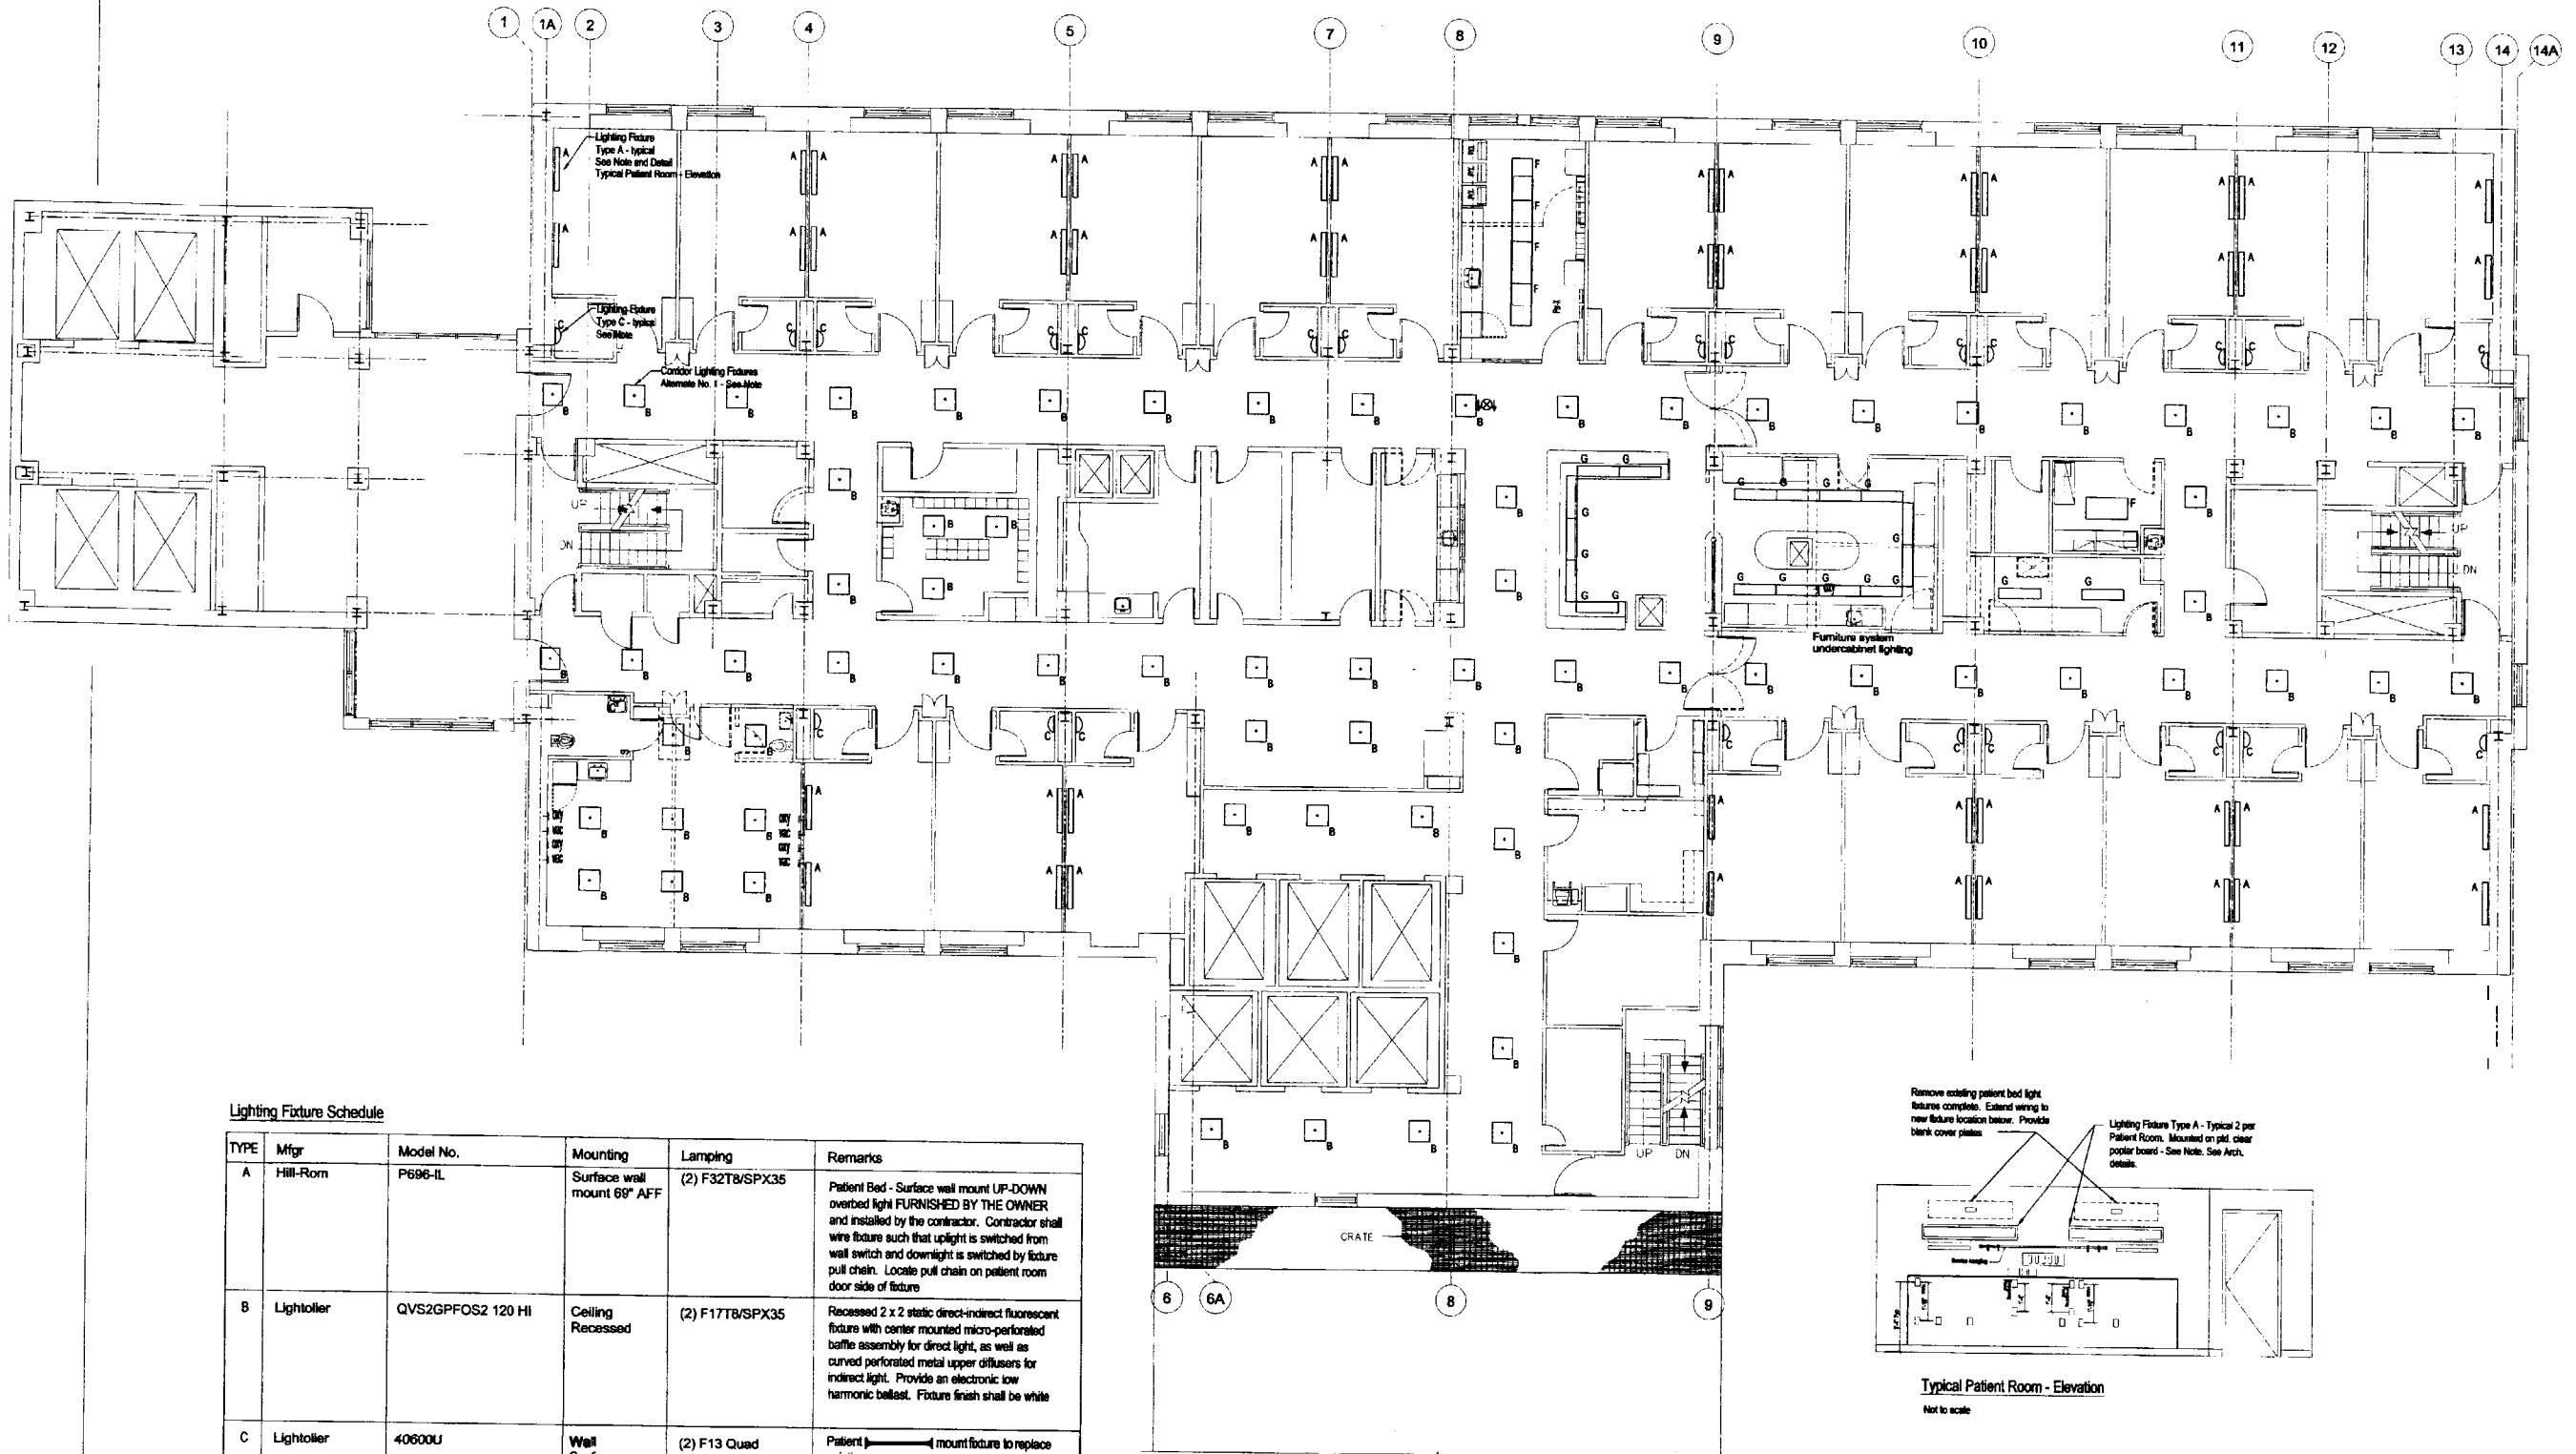

Lighting Fixture Schedule

TYPE	Mfr	Model No.	Mounting	Lamping	Remarks
A	Hill-Rom	P696-IL	Surface wall mount 69" AFF	(2) F32T8/SPX35	Patient Bed - Surface wall mount UP-DOWN overbed light FURNISHED BY THE OWNER and installed by the contractor. Contractor shall wire fixture such that uplight is switched from wall switch and downlight is switched by fixture pull chain. Locate pull chain on patient room door side of fixture
B	Lightolier	QVS2GPFOS2 120 HI	Ceiling Recessed	(2) F17T8/SPX35	Recessed 2 x 2 static direct-indirect fluorescent fixture with center mounted micro-perforated baffle assembly for direct light, as well as curved perforated metal upper diffusers for indirect light. Provide an electronic low harmonic ballast. Fixture finish shall be white
C	Lightolier	40600U	Wall Surface	(2) F13 Quad	Patient \rightarrow mount fixture to replace existing.
F	Lightolier	QVS2GPFVLV332 120 HI	Ceiling Recessed	(3) F32T8/SPX35	Recessed 2 x 4 static direct-indirect fluorescent fixture with center mounted flat blade perforated louver for direct light, as well as curved perforated metal upper diffusers for indirect light. Provide an electronic low harmonic ballast. Fixture finish shall be white
G	Lightolier	VPS1G24PS232 120 HI	Ceiling Recessed	(2) F2T8/SPX4	Recessed 1 x 4 parabolic fixture. Provide electronic low harmonic ballasts. Fixture finish shall be white.

Lamp numbers refer to General Electric designations. Also approved are equal lamps manufactured by Osram Sylvania, and Philips. All fixtures are 120 volt, unless specifically noted otherwise. NOTE: All fluorescent ballasts shall be low harmonic type ($\leq 10\%$). Only the specified lighting fixtures will be considered for approval.

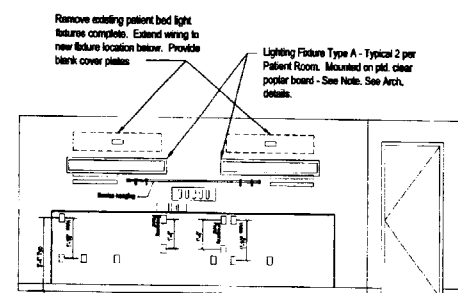

Typical Patient Room - Elevation

Not to scale

NOTES

1. Lighting - Wire new fixtures to existing switches and circuiting. Contractor shall confirm correct switching in advance of installation of new fixtures and ballasts. Contractor shall measure and confirm loading of lighting branch circuits at panelboards (Correct any unbalanced phases and overloaded circuits). Perform for all lighting branch circuits on the floor.
2. Corridor lighting fixtures (and work associated with their installation) are a part of Alternate No. 1. See Schedule of Alternates for complete description.
3. Rooms 7120, 7125, and 7127 - Staff Facilities - Fixtures (and work associated with their installation) shown are a part of Alternate No. 2. See Schedule of Alternates for complete description.
4. Type A - Patient Bed Lighting Fixtures - Owner provided - Contractor installed and wired. Surface wall mount up-down overbed light. Contractor shall wire fixture such that upper lamp is switched from wall switch and lower lamp is switched by fixture pull chain. Locate pull chain on room door side of fixture - Typical all patient beds.
5. Type C - Patient bathroom fixture - Remove existing wall mount fixtures. Provide and install new fixture in place. Provide necessary modifications to recessed box to accommodate new fixture.



16
8
4
0

Richards Wing
Seventh Floor
Renovations

Maine Medical Center
Portland, Maine 04102

Architect
WINTON SCOTT ARCHITECTS
Portland, Maine


Mechanical Engineering
Mechanical Systems Engineers
Yarmouth, Maine

Electrical Engineering
Bartlett Design
Bath, Maine

Lighting Plan
E2

Scale: 1/8" = 1' - 0"

May 27, 2004

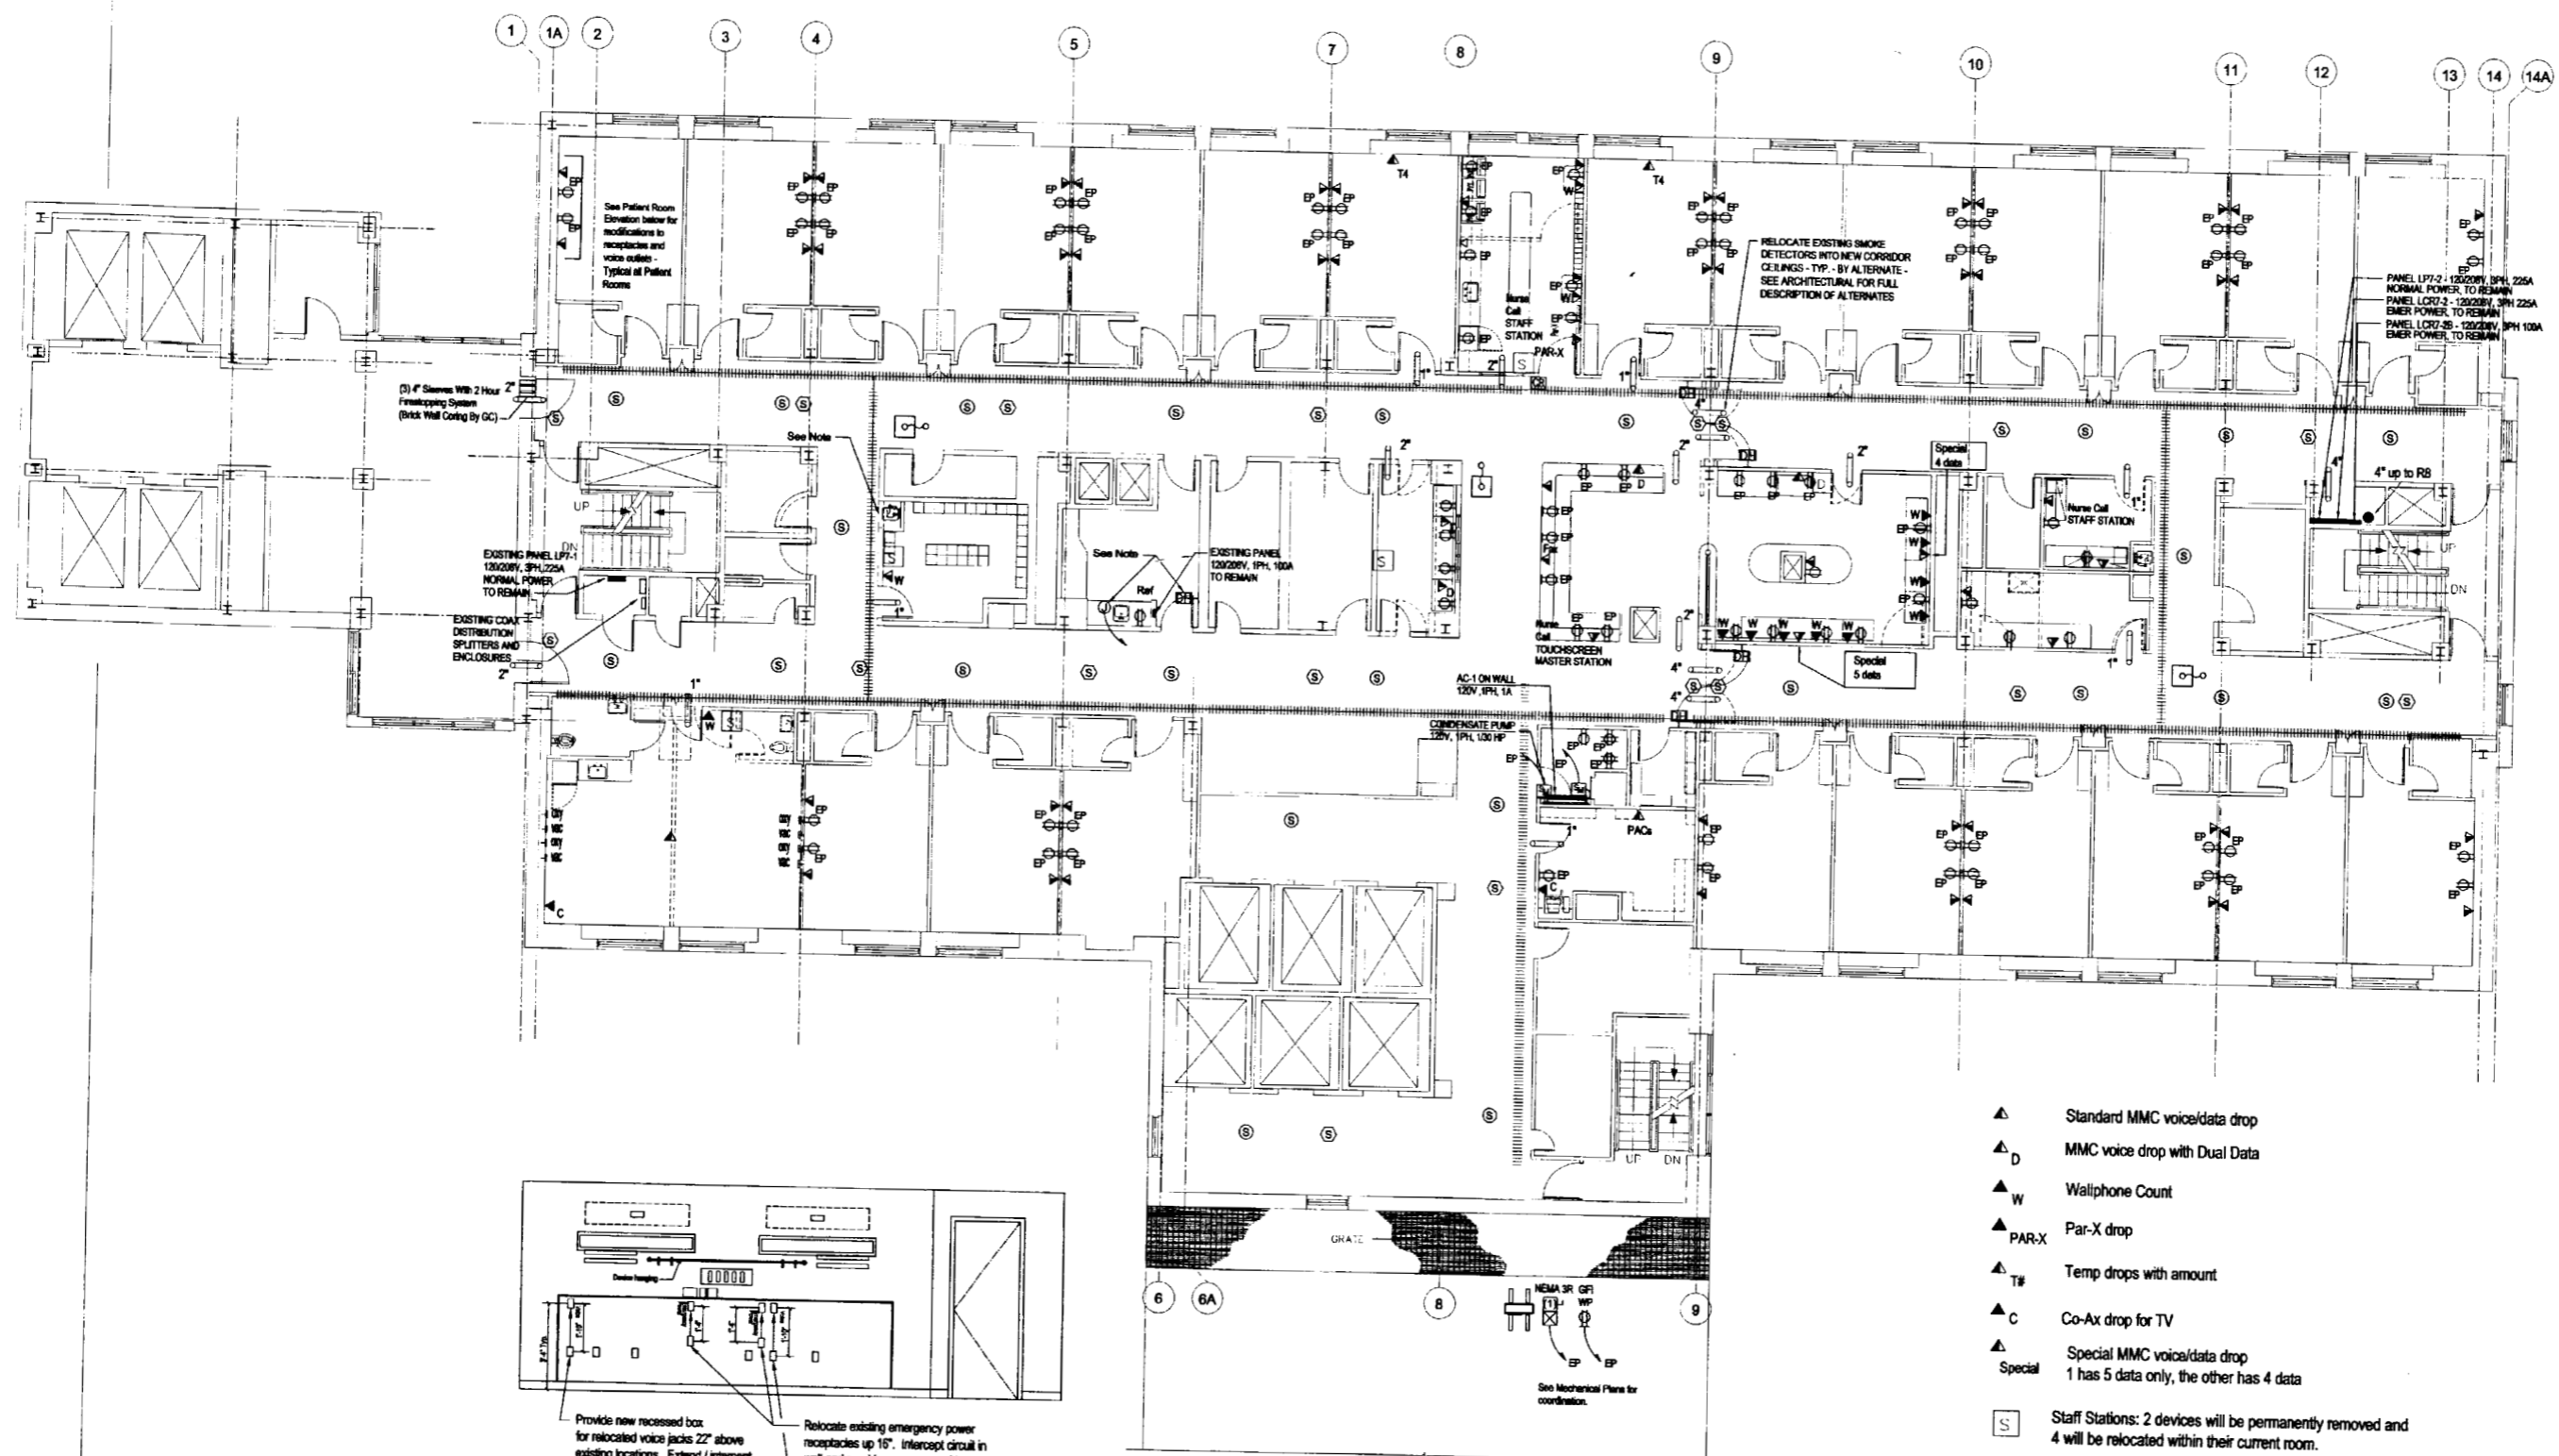

16
8
4
0

**Richards Wing
Seventh Floor
Renovations**

Maine Medical Center
Portland, Maine 04102


Architect
WINTON SCOTT ARCHITECTS
Portland, Maine

Mechanical Engineering
Mechanical Systems Engineers
Yarmouth, Maine

Electrical Engineering
Bartlett Design
Bath, Maine

**Power and
Systems Plan
E3**

Scale: 1/8" = 1' - 0"
May 27, 2004

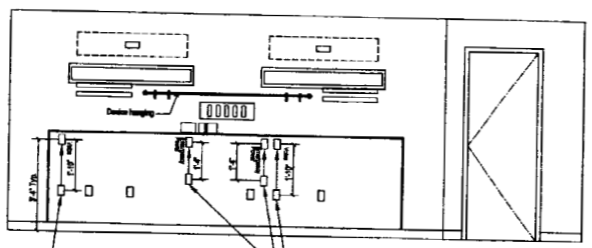

Provide new recessed box for relocated voice jacks 22" above existing locations. Extend / intercept conduit in wall and connect to new recessed box location. Confirm pathway for Telecommunications Network System Contractor for cabling and termination.

Relocate existing emergency power receptacles up 16". Intercept circuit in wall and provide new recessed box in wall at the new upper location.

Typical Patient Room - Elevation
Not to scale

NOTES

1. Provide sleeves through walls and floors where indicated.
2. Provide and install receptacles and conduit for new receptacles and power indicated on the plan. Recessed boxes and conduit is assumed where possible. Surface raceway and boxes otherwise. Circuit to emergency and normal power panels as indicated.
3. Telecommunications Network Services - The electrical contractor shall provide all boxes, conduit, and pathways for the Maine Medical Center's Telecommunications Network Services contractor.
4. Kitchen 7116 - Install and wire magnetic door hold open at south door. Hold open provided by Division 1. Interface with existing fire alarm system low voltage power supply and fire alarm door release function. Coordinate with architectural drawings. Re-feed instantaneous water heater (to be relocated in new counter top). Heater is located under counter adjacent to sink.
5. Corridor DC-R711 - Relocate surface wall mount duplex receptacle and surface mount data network box and wall mount wireless access device.

- ▲ Standard MMC voice/data drop
- ▲_D MMC voice drop with Dual Data
- ▲_W Wallphone Count
- ▲_{PAR-X} Par-X drop
- ▲_{T#} Temp drops with amount
- ▲_C Co-Ax drop for TV
- ▲_{Special} Special MMC voice/data drop
1 has 5 data only, the other has 4 data
- _S Staff Stations: 2 devices will be permanently removed and 4 will be relocated within their current room.
- _D Duty Stations: 1 will be relocated within its current room
- Sleeve - Size noted
- ⊕ Duplex Receptacle
(no designation = normal power)
EP = Emergency power ckt.
- ⊙ New owner provided speaker / intercomm



CITY OF PORTLAND, MAINE

Department of Building Inspections

July 30 20 07

Received from Lansford & Low Inc.

Location of Work _____

Cost of Construction \$ _____

Permit Fee \$ 101.00

Building (IL) Plumbing (I5) Electrical (I2) Site Plan (U2)

Other _____

CBL: 5507

Check #: 99808

Total Collected \$ 101.00

THIS IS NOT A PERMIT

No work is to be started until PERMIT CARD is actually posted upon the premises. Acceptance of fee is no guarantee that permit will be granted. PRESERVE THIS RECEIPT. In case permit cannot be granted the amount of the fee will be refunded upon return of the receipt less \$10.00 or 10% whichever is greater.

WHITE - Applicant's Copy
YELLOW - Office Copy
PINK - Permit Copy