NOTES:

1. SEE SHEET PL001 FOR LEGEND AND ABBREVIATIONS.

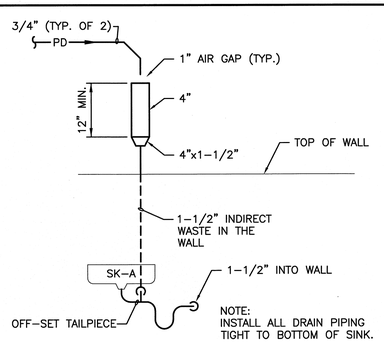

A6	INDIRECT WASTE CONNECTION
NOT TO SCALE	

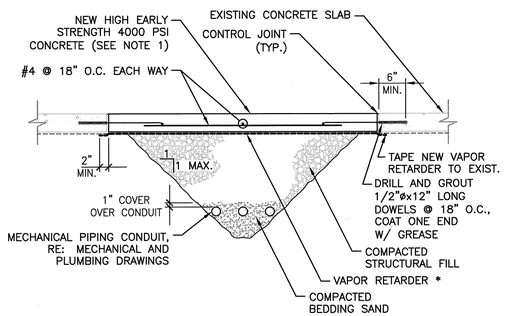

NOTES:

1. CONCRETE SHALL BE LOW SLUMP (<4"), HIGH EARLY STRENGTH WITH RAPID SETTING CEMENT BY CTS OR EQUAL.
2. NEW CONCRETE SLAB THICKNESS SHALL MATCH EXISTING.
3. PROVIDE TRANSVERSE SAW CUT CONTROL JOINTS THAT ARE 1/4 OF THE SLAB DEPTH AND ARE SPACED 1.5x THE TRENCH WIDTH.
4. PROVIDE CONTROL JOINTS AT INTERFACE BETWEEN NEW AND EXISTING CONCRETE.
5. WET CURE FOR 7 DAYS MINIMUM.
6. * VAPOR RETARDER REQUIRED ONLY IF THERE IS A VAPOR RETARDER UNDER EXISTING SLAB.

A10	TYPICAL TRENCHING DETAIL
3/4"=1'-0"	

144 Fore Street/P.O. Box 618
Portland, Maine 04104
tel. (207) 772-3846
fax. (207) 772-1070
www.smrtinc.com

ARCHITECTURE
ENGINEERING
PLANNING
INTERIOR DESIGN
COMMISSIONING

SMRT

STATE OF MAINE
TODD A. CHASE
No. 9241
LICENSED
PROFESSIONAL ENGINEER
8-24-10

Bramhall Radiology
FLUORO RENOVATIONS
PORTLAND, ME

ISSUED FOR CONSTRUCTION
8.24.10

CURRENT ISSUE STATUS:

REV	DESCRIPTION	DATE
0	ISSUED FOR CONSTRUCTION	8.24.10

GRAPHIC SCALE: 0" 1"

SCALE:	AS INDICATED
PROJECT MANAGER:	DJV
JC/DRAWN BY:	KPB
A/E OF RECORD:	TAC
PROJECT NO:	09022-02
DATE:	8.24.10

SHEET TITLE:
PLUMBING DETAILS

SHEET No.
PL501

©COPYRIGHT 2008 SMRT INC.