

SECTION 260500

INSTALLATION OF WIRE AND CABLE

PART 1 - GENERAL

1.1 GENERAL

A. The Provisions of Section 260500, General Requirements for Electrical Work, apply to the Work of this Section.

1.2 CODES AND STANDARDS:

A. Products shall comply with the following codes and standards and shall be UL listed and labeled where applicable.

UL 488A	Wire Connectors and Soldering Lugs for use with Copper Conductors.
UL 510	Electrical Insulating Tape

PART 2 - PRODUCTS

2.1 WIRE AND CABLE

A. Wire and cable are specified in other Sections of Division 26.

2.2 TERMINATIONS AND SPLICES

A. Power Wiring:

- Terminal lugs, connectors and splices shall be tin plated, high conductivity copper compression type. They shall have chamfered barrels and be permanently identified with conductor sizes.
- Terminal lugs for conductors No. 3/0 AWG and larger shall be long barrel NEMA two hole type.
- Splices shall be long barrel butt type with a center step in the splice barrel.
- Hydraulic crimping tools with proper die sizes which require full closure before reopening shall be used.

B. Lighting and branch circuits

- Splices and taps in lighting and branch circuit wiring shall be 3M Scotchlok spring connectors or equal.

C. Metal clad cable connectors.

- For non-jacketed metal clad cable in dry locations, cable terminations shall be O.Z. Godfrey Type PK for use with galvanized steel armor or Type PKA for use with aluminum armor. Cable terminations shall be provided with locknuts and bushings.

PART 3 - EXECUTION

3.1 PREPARATION OF RACEWAYS

A. Raceways shall be substantially completed before any wiring is installed in them. Before any wiring is pulled into a conduit, the conduit shall be cleaned and tested for obstructions and cleared of foreign material that may be found.

3.2 PULLING INTO RACEWAYS

A. All possible care shall be taken in pulling of wiring into conduits or other raceways. The cable reels or coils shall be set up in such a way that the conductor may be trained into the raceway as directly as possible with a minimum number of changes of direction or amount of bending. Where several cables are contained in one conduit, all such cables shall be pulled in together.

B. The use of pulling lubricants shall be restricted to non-hardening type, approved by UL, the cable manufacturer and Philips.

3.3 SPLICES AND TERMINATIONS

A. All power and control wiring shall be continuous and shall not be spliced unless otherwise indicated on the Drawings.

B. Bolts, nuts and hardware used for terminations shall be silicone bronze. All terminations shall be properly torqued and provided with Belleville washers.

C. Where terminations are made on insulated buses, the terminations shall be insulated using the proper tape(s) and fillers for the voltage level of the cable.

D. Connections in motor terminal boxes shall be made by installing compression type lugs on the motor branch circuit conductors and the motor leads and bolting the lugs together then insulating with motor lead connection kits, Raychem, 3M or equal.

3.4 IDENTIFICATION

A. All power wiring conductors shall be color coded as follows:

Phase	208Y/120V	480Y/277V
Phase A	Black	Brown
Phase B	Red	Orange
Phase C	Blue	Yellow
Neutral	White	Gray
Ground	Green	Green

END OF SECTION 260500

SECTION 262416

PANELBOARDS

PART 1 - GENERAL

1.1 GENERAL

A. The provisions of Section 260500, General Requirements for Electrical Work, apply to the Work of this Section.

1.2 CODES AND STANDARDS

A. Products shall comply with the following codes and standards and shall be UL listed and labeled:

NEMA AB-1	Molded Case Circuit Breakers
NEMA PB-1	Panelboards
UL 50	Enclosures for Electrical Equipment
UL 67	Panelboards
UL 489	Molded Case Circuit Breakers and Circuit Breaker Enclosures

1.3 SUBMITTALS

A. Manufacturer's product data sheets.

B. Circuit breaker schedules.

C. Dimensioned plans, elevations, sections and details.

1.4 MANUFACTURERS

A. Subject to compliance with the requirements of this Section:

Square D  
Approved equal

PART 2 - PRODUCTS

2.1 GENERAL

A. Panelboards shall be of the sizes, rating and arrangement shown on the Drawings.

B. Panelboards shall be provided complete with all overcurrent devices, accessories and trim.

C. All panelboards shall be provided with safety barriers for dead front construction.

D. The required short circuit ratings of assembled panelboards are shown on the drawings. The short circuit rating of every overcurrent device in the panel shall meet or exceed the panel rating. Unless otherwise noted on the drawings, series rated combinations will not be permitted.

2.2 CABINETS

A. Boxes shall be code gauge galvanized sheet steel.

B. Trim shall be code gauge steel, ANSI-61 gray finish with stainless steel flush type lock/latch handle. All locks shall be keyed alike.

C. Trim for surface mounted panels shall be door-in-door construction such that the gutter space may be exposed by a hinged door.

D. Directory frames shall be metal frame with plastic covers.

2.3 BUS

A. All bus work shall be copper.

B. Neutral buses shall be 100% rated with adequate connectors for all outgoing neutral conductors.

C. Panelboards shall be provided with copper ground buses. Provide isolated ground buses where indicated on the drawings.

D. Bus shall be designed for sequence phase connection to allow the installation of one, two or three pole branch circuit breakers in any position.

2.4 OVERCURRENT DEVICES

A. Overcurrent devices shall be trip-free molded case, bolt-on, thermal-magnetic circuit breakers.

B. Main circuit breakers shall be individually mounted and bolted to bus assembly. Back fed branch mounted circuit breakers are prohibited.

C. Front faces of all circuit breakers shall be flush. Trip indication shall be clearly shown by the handle position between the ON and OFF positions.

D. Ground fault and arc fault circuit breakers shall require no more panel space than standard breakers.

E. All connections shall be rated for 75° C copper conductors.

PART 3 - EXECUTION

3.1 PANELBOARDS

A. Panelboards shall be labeled in accordance with Section 260500, General Requirements for Electrical Work.

B. Panelboard covers are required to have 2 labels. The first, an Arc flash warning label and the second, an OSHA label requiring 3 feet, (3 feet 6 inches or 4 feet as applicable), clearance in front of the panel.

END OF SECTION 262416

SECTION 265100

LIGHTING FIXTURES

PART 1 - GENERAL

1.1 GENERAL

A. Provisions of Section 260500, General Requirements for Electrical Work and Section 260560, Installation of Wire and Cable apply to the work of this section.

1.2 CODES AND STANDARDS

A. Products shall comply with the following codes and standards and shall be UL-listed and labeled:

CBM Labels	Certified Ballast Manufacturers Assoc.
NEC Art. 410	National Electrical Code
FCC Part 18	RFI and EMI
ANSI C82.41	Line Transient Protection
UL 1570	Fluorescent Lighting Fixtures
UL 924	Emergency Lighting and Power Equipment
UL 1088	Temporary Lighting

1.3 SUBMITTALS

A. Submit manufacturer's product data, photometrics, and installation instructions for each type of light fixture specified. Fixture submittals shall be in booklet form with separate sheet for each fixture assembled in "luminaire type" alphabetical order, with proposed fixture and accessories clearly indicated on each sheet.

B. Submit on a separate sheet for each fluorescent fixture type specified, the ballast manufacturer, type and technical data for that ballast.

C. Submit on a separate sheet for each light fixture specified, the proposed lamp and manufacturers data for that lamp.

1.4 MANUFACTURERS

A. Provide products of the manufacturers specified on the contract drawings and as listed under Part 2 of this section.

PART 2 - PRODUCTS

2.1 GENERAL

A. Light fixtures shall be provided with housings, trims, ballasts, lamp holders, sockets, reflectors, wiring and other components required, as a factory-assembled unit for a complete installation.

B. Provide electrical wiring within light fixtures suitable for connecting to branch circuit wiring in accordance with N.E.C. Article 410, Paragraph 52.

C. Deliver interior lighting fixtures in factory fabricated containers and wrapping, which properly protect fixtures from damage.

D. Store interior lighting fixtures in original packaging. Store inside well-ventilated area protected from weather, moisture, soiling, humidity, extreme temperatures, laid flat and on skids to keep off floors and ground.

E. Fixtures installed in ceilings, suspended from ceilings or on walls shall have a plastic film covering protecting lens, lower and lamps from dust, dirt and debris. Plastic film shall not be removed until construction is completed.

2.2 FLUORESCENT FIXTURES

A. General: Provide fluorescent fixtures of sizes, types and ratings indicated and specified in the Lighting Fixture Schedule on the Contract Drawings.

B. Indoor fluorescent fixtures containing double-ended T8 or T5 lamps shall be provided with an internal disconnecting means to disconnect power to the fixture.

C. Fluorescent-Lamp Ballasts: Provide low-energy solid state fluorescent lamp ballasts, operating lamps with a frequency of >20KHz and capable of operating lamp types indicated. Ballasts shall be high power factor >0.90, Class A sound rating. Ballasts shall have lamp current crest factor of 1.7 or less and total harmonic distortion less than 20%. Ballasts shall be UL listed, Class P, and meet FCC 47CFR Part 18 Non-Consumer and meet applicable ANSI standard.

1. Ballasts that operate T8 lamps shall have the following requirements:

- Normal ballast factor (0.88-1.03)
- Ballast shall be Programmed Start type
- Ballast must be capable of 0°F starting.
- Ballast shall be one of the following:
  - Sylvania Quiktronic PROStart PSN series.
  - General Electric Ultramax series.
  - Advance Optimum IOP series.

2. Ballasts that operate T5 lamps shall have the following requirements:

- Ballasts shall have an end of lamp life sensing circuit capable of shutting the lamp down to prevent lamp glass from cracking and lamp base sockets from melting.
- Ballast factor shall be 0.90 - 1.1.
- Ballast shall be Programmed Start type to operate lamps in series.
- Ballast must be capable of 0°F starting.
- Ballast shall be one of the following:
  - Sylvania Quiktronic Prostart T5HO series (24, and 54 watt).
  - General Electric Ultrastart series.
  - Advance Centium ION series.

2.3 LAMPS

A. Provide fluorescent lamps of types as indicated on the contract drawings.

B. T8 Lamp Type:

1. All lamps shall have a minimum 85 CRI and an average rated life of 30,000 hours based on 3hrs/start when used with a programmed rapid start ballast. A 17 Watt lamp shall be minimum 1350 lumens. A 32 Watt straight lamp shall be minimum 2950 lumens.

2. Lamp color temperature shall be cool white, 3500K unless otherwise noted.

- Lamps shall be one of the following:
  - Sylvania Pentron ECO series.
  - Sylvania Octron 800PS series.
  - General Electric Ecolux Starcoat T8 series.
  - Philips 800 Alto T8 series.

C. T5 Lamp Type:

1. All lamps shall have an average rated life of 20,000 hours based on 3hrs/start, and a minimum 85 CRI. A 24 Watt HO lamp shall be minimum 1800 lumens (at 25°C). A 54 Watt HO lamp shall be minimum 4450 lumens (at 25°C).

2. Lamp color temperature shall be cool white, 3500K unless otherwise noted.

3. Lamps shall be one of the following:

- Sylvania Pentron ECO series.
- General Electric Ecolux Starcoat T5 series.
- Philips Silhouette Alto series.

D. Lamps shall be manufactured by Osram Sylvania, General Electric, Philips Lighting Co. or approved equal.

PART 3 - EXECUTION

3.1 GENERAL

A. Examine all areas and conditions under which lighting fixtures are to be installed and structure which will support lighting fixtures. Notify the General Contractor in writing of any conditions which are detrimental to proper installation and completion of the work. Do not proceed with work until unsatisfactory conditions have been corrected in a manner acceptable to the Installer.

B. Coordinate light fixture installations with other trades. Fluorescent light fixtures should be installed at least two feet away from smoke detectors. Coordinate all lighting fixtures with mechanical piping and ductwork to allow for proper clearance.

3.2 INSTALLATION

A. Install all lighting fixtures at locations and heights indicated, in accordance with the architectural reflected ceiling plans.

B. Provide fixtures and/or fixture outlet boxes with hangers, channel or other method of fastening and supporting fixtures required for proper installation.

C. Luminaires installed in suspended ceilings shall be independently supported, directly from the building structure. Each luminaire shall be supported at each end.

D. Tighten connectors and terminals, including screws and bolts in accordance with equipment manufacturer's published torque tightening values for equipment connectors. All screws and bolts shall have washers.

3.3 SPLICES AND TERMINATIONS

A. Twist on wire connectors shall be installed which utilize square-wire spring grips and thermo plastic shells. Install connectors to meet the manufacturer's torquing requirements. Install wire connectors of size required as not to exceed the manufacturer's UL-listed CSA recognized wire combinations.

3.4 FIELD QUALITY CONTROL

A. At date of substantial completion, all lamps that are not functioning, have color deficiencies, or are noticeably dimmed shall be replaced with new lamps as determined by the Engineer.

B. All lamps used for temporary lighting in new light fixtures shall be replaced with new lamps.

C. All light fixtures shall be cleaned of dirt and debris upon completion of construction. All finger prints and smudges shall be cleaned.

D. All installed fixtures during remainder of construction shall be protected in accordance with Section 2.1 Paragraph E of this specification section.



E. All light fixtures shall be grounded in accordance with article 250 and 410 of the NEC. Tighten connections to comply with tightening torques specified in UL 488A to assure permanent and effective grounds.

F. All light fixtures damaged in shipping or during installation shall be replaced with new fixtures at no cost to the Owner.

END OF SECTION 265100

144 Fore Street, P.O. Box 618  
Portland, Maine 04104  
Tel: (207) 772-8846  
Fax: (207) 772-1070  
www.smri.com

ARCHITECTURE  
ENGINEERING  
PLANNING  
INTERIOR DESIGN  
COMMISSIONING

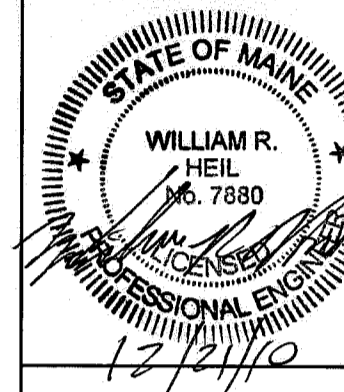

17/21/10

MAINE MEDICAL CENTER  
CATH LAB #6  
PORTLAND, ME

DATE	12-21-10
ISSUED FOR CONSTRUCTION	
REV	0

GRAPHIC SCALE:  
0" 1"

SCALE: NOT TO SCALE  
PROJECT MANAGER: KD  
DRAWN BY: BAL  
DATE OF RECORD: 11/01  
PROJECT NO: 10112-00  
DATE: 12-21-10

SHEET TITLE:  
SPECIFICATIONS  
SHEET 2

SHEET No.  
E-003  
©2009 SMRI 2224 9897 ME

ISSUED FOR CONSTRUCTION  
12-21-10